



origin

BY ATLAS
LIGHTING

MODEL #: ORBLP-EBKT

Field Install Emergency Driver Kit for Origin Panels




Specifications

Electrical


- Can be operated as NORMALLY-ON, NORMALLY-OFF or SWITCHED LOAD
- Universal 120-277V, 50-60 Hz input Charge/Power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- Long-life, maintenance free, rechargeable NiCad battery.
- Output short/overcurrent protection: Electronic limiting, with operation resuming upon removal of fault.
- 90 Minute minimum emergency operating time over full temperature range.
- Output classification: Class 2 Compliant
- Surge protection: Per C62.41 (TVS).
- Input overcurrent protection: Fusible link.
- 24 hour maximum battery recharge time

Model	Watts	Lumens
ORBLP-EBKT	10.7	1600

Dimensions

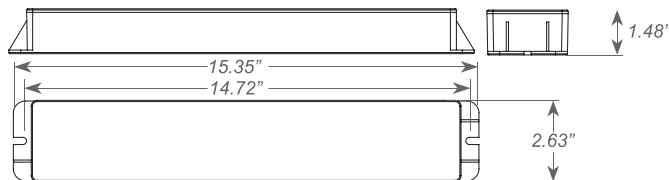


Location on the Origin Back Lit Panel

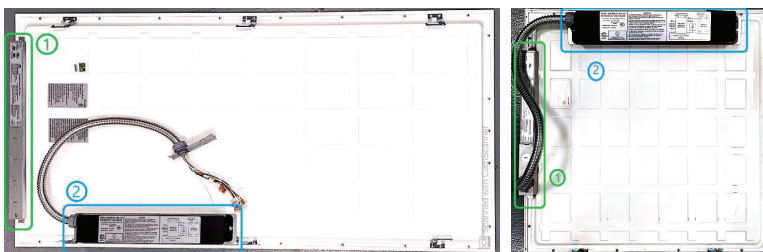

2x4 Back Lit Panel

2x2 Back Lit Panel

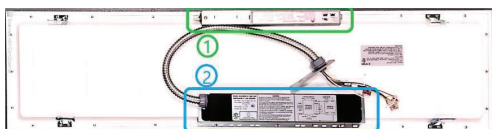

1x4 Back Lit Panel

Housing

- LED illuminated remote mounted test switch.
- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in a black finish.
- Provided with 2' flex conduit.

Mounting

- Mounts on top of the fixture (as shown in images).

Warranty / Listing

- UL Classified for field installation.
- Suitable for damp locations (0°C - 50°C).
- 5 year warranty on all electronics and housing.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State codes.
- Certified to CEC under Title 20 regulations.