

# AREA LIGHTING & POLES

EAGLE - AREA LIGHTS | ORIGIN AREA LIGHTS | POLES



# Origin Series Medium LED Area Light

**LUMEN SELECTABLE**  
- ☀ +



- Multi-Mount Bracket Included
- Offers 180° of mounting angle adjustment.
- Both Type III and Type V optics are included in the box.



## ORDERING INFORMATION

ORA	SEL	15-22L			
PRODUCT SERIES	SELECTABLE	LUMEN PACKAGE	COLOR TEMP.	VOLTAGE	FIXTURE COLOR
ORA = Origin Area Light	SEL = Selectable	15-22L = 14,500 - 21,750 Lumens Selectable 30-43L = 29,000 - 43,500 Lumens Selectable	blank = Selectable 3000K, 4000K, 5000K	Blank = 120-277 4 = 347-480V	Blank = Bronze

### MULTI-MOUNT BRACKET




Square and round pole mount, trunnion mount, slipfitter mount included in carton.

### TOOL-FREE SWAPPABLE OPTICS




Type III optic is pre-installed. Type V included in the box.

## MULTIPLE DISTRIBUTION PATTERNS - ROTATABLE OPTICS



TYPE III



TYPE V

## PERFORMANCE DATA

LUMEN PACKAGE	DISTRIBUTION	CRI	3000K CCT		4000K CCT		5000K CCT		WATTAGE	REPLACES UP TO
			DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)		
<b>SELECTABLE</b>										
15-22L	14,836	146	15,306	155	15,415	152	14,500	145	100	250W
	15,390	152	15,908	159	16,104	157	14,500	145		
	17,526	142	18,130	152	18,076	148	17,400	145	120	400W
	17,979	148	18,670	157	18,817	153	17,400	145		
	20,834	138	21,551	148	21,347	142	21,750	145	150	400W
	22,349	142	23,287	152	23,205	145	21,750	145		
30-43L	30,197	148	31,993	161	32,486	159	29,000	145	200	400W
	30,514	152	32,318	164	32,996	163	29,000	145		
	35,331	143	37,689	157	38,238	154	34,800	145	240	1000W
	35,439	148	37,746	161	38,414	158	34,800	145		
	41,560	138	44,839	154	45,503	151	43,500	145	300	1000W
	43,145	143	45,695	157	46,111	152	43,500	145		

## THE INFORMATION YOU NEED - ALL IN ONE PLACE

Visit [www.atlasled.com](http://www.atlasled.com) or scan QR code more information, including cut sheets, case studies, installation videos, instruction sheets, savings information, IES files, lighting calculation tools and more.



# Eagles Series Small LED Area Light

**LUMEN SELECTABLE**



- Easy to install, easy to maintain
- Optical Grade Individual Lenses
- Delivers Increased Footcandles



## ORDERING INFORMATION

SLPS	S	6-12L	T2	4K				
PRODUCT SERIES	SELECTABLE	LUMEN PACKAGE	DISTRIBUTION	COLOR TEMP.	VOLTAGE	COLOR RENDERING	FIXTURE COLOR	OPTIONS
SLPS = Small Eagle Series Area Light	blank = Fixed	6L = 6,000 Lumens 9L = 9,000 Lumens 12L = 12,000 Lumens	T2 = Type 2 T5 = Type 5 FT = Forward Throw T2L = Type 2 Rotated Left	3K = 3000K 4K = 4000K 45K = 4500K 5K = 5000K	Blank = 120-277 4 = 347/480	Blank = 70CRI	Blank = Bronze BK = Black SL = Silver WT = White	PR = 7 Pin Photocell Receptacle SP = Surge Protection IC = Integrated Motion Control*
SLPS = Eagle Series Area Light	S = Selectable	6-12L = 6,000, 8,000, 12,000 Lumens Selectable	FTL = Forward Throw Rotated Left T2R = Type 2 Rotated Right FTR = Forward Throw Rotated Right					*Only available in 120-277V / Not available on Selectable Units

## OPTIONS AND ACCESSORIES




TLRA-7P  
Screw In Twist Lock Adapter

## INSTALLATION




**QUICK & EASY INSTALLATION**  
Scan to view installation video


## MULTIPLE DISTRIBUTION PATTERNS - ROTATABLE OPTICS



**TYPE II**



**TYPE FT**



**TYPE V**

## PERFORMANCE DATA

HOUSING	UNIT	DISTRIBUTION	CRI	4000K CCT		4500K CCT		5000K CCT		WATTAGE	REPLACES UP TO
				DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)		
<b>SELECTABLE</b>											
SLPSS	6-12L	T2	70	6,036	143	6,036	143	6,036	143	42	175W MH
		FT	70	5,899	140	5,859	139	5,859	139		
		T5	70	5,812	138	5,812	138	5,812	138		
		63	T2	70	8,946	142	8,946	142	8,946	142	
			FT	70	8,743	138	8,684	137	8,684	137	
			T5	70	8,614	136	8,614	136	8,614	136	
		86	T2	70	11,755	137	11,755	137	11,755	137	
			FT	70	11,488	134	11,410	133	11,410	133	
			T5	70	11,319	132	11,319	132	11,319	132	

HOUSING	UNIT	DISTRIBUTION	CRI	4000K CCT		4500K CCT		5000K CCT		WATTAGE	REPLACES UP TO
				DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)		
<b>FIXED</b>											
SLPS	6L	T2	70	6,297	154	6,288	153	6,288	153	41	175W MH
		FT	70	6,005	146	5,839	144	5,839	144		
		T5	70	6,025	147	6,016	147	6,016	147		
	9L	T2	70	9,041	144	8,859	142	8,859	142	63	175W MH
		FT	70	8,717	139	8,541	136	8,541	136		
		T5	70	8,639	138	8,465	135	8,465	135		
	12L	T2	70	12,028	136	11,822	133	11,822	133	89	250W MH
		FT	70	11,417	129	11,222	127	11,222	127		
		T5	70	11,578	131	11,380	129	11,380	129		

Scan QR code above for ordering format and more detailed information

### THE INFORMATION YOU NEED - ALL IN ONE PLACE

Visit [www.atlasled.com](http://www.atlasled.com) or scan QR code more information, including cut sheets, case studies, installation videos, instruction sheets, savings information, IES files, lighting calculation tools and more.



# Eagles Series Medium LED Area Light

**LUMEN SELECTABLE**



- Easy to install, easy to maintain
- Optical Grade Individual Lenses
- Delivers Increased Footcandles



## ORDERING INFORMATION

SLPM	S	12-24L	T2	4K				
PRODUCT SERIES	SELECTABLE	LUMEN PACKAGE	DISTRIBUTION	COLOR TEMP.	VOLTAGE	COLOR RENDERING	FIXTURE COLOR	OPTIONS
SLPM = Eagle Series Area Light	S = Selectable	12-24L = 12,000- 24,000 Lumens Selectable 25-50L = 25,000-50,000 Lumens Selectable	T2 = Type 2 T3 = Type 3 T5 = Type 5 FT = Forward Throw T2L = Type 2 Rotated Left T3L = Type 3 Rotated Left FTL = Forward Throw Rotated Left T2R = Type 2 Rotated Right T3R = Type 3 Rotated Right FTR = Forward Throw Rotated Right	3K = 3000K 4K = 4000K 45K = 4500K 5K = 5000K	Blank = 120-277 4 = 347/480	Blank = 70CRI	Blank = Bronze BK = Black SL = Silver WT = White	PR = 7 Pin Photocell Receptacle SP = Surge Protection M = Motion

### OPTIONS AND ACCESSORIES




TLRA-7P  
Screw In Twist Lock Adapter

### INSTALLATION




**QUICK & EASY INSTALLATION**  
*Scan to view installation video*


## MULTIPLE DISTRIBUTION PATTERNS - ROTATABLE OPTICS




**TYPE II**



**TYPE III**



**TYPE FT**



**TYPE V**

## PERFORMANCE DATA

HOUSING	UNIT	DISTRIBUTION	CRI	3000K CCT		4000K CCT		4500K CCT		5000K CCT		WATTAGE	REPLACES UP TO
				DELIVERED LUMENS	EFFICACY (LPW)								
<b>SELECTABLE</b>													
SLPMS	12-24L	T2	70	12,646	160	12,646	160	12,646	160	13,434	170	79	250W MH
		T3	70	25,220	148	12,646	160	12,646	160	13,508	171		
		FT	70	12,646	160	12,646	160	12,646	160	13,278	168		
		T5	70	12,646	160	12,646	160	12,646	160	13,541	172		
		T2	70	18,707	151	18,707	151	18,707	151	19,872	161	124	400W MH
		T3	70	18,707	151	18,707	151	18,707	151	19,982	161		
		FT	70	18,707	151	18,707	151	18,707	151	19,642	159		
		T5	70	18,707	151	18,707	151	18,707	151	20,032	162		
		T2	70	23,741	141	23,741	141	23,741	141	25,220	148	171	400W MH
		T3	70	23,741	141	23,741	141	23,741	141	25,359	149		
		FT	70	23,741	141	23,741	141	23,741	141	24,928	146		
		T5	70	23,741	141	23,741	141	23,741	141	25,422	149		
	25-50L	T2	70	26536	168	26054	165	26526	168	13,434	170	158	400W MH
		T3	70	26535	168	26052	165	26524	168	13,508	171		
		FT	70	25884	164	25414	161	25874	164	13,278	168		
		T5	70	26448	167	25967	164	26438	167	13,541	172		
		T2	70	38675	158	37972	155	38659	158	19,872	161	245	1000W MH
		T3	70	38672	158	37969	155	38656	158	19,982	161		
		FT	70	37725	154	37039	151	37709	154	19,642	159		
		T5	70	38546	157	37846	154	38531	157	20,032	162		
T2		70	48164	145	47289	142	48145	145	25,220	148	332	1000W MH	
T3		70	48161	145	47285	142	48141	145	25,359	149			
FT		70	46981	142	46127	139	46962	141	24,928	146			
T5		70	48004	145	47132	142	47985	145	25,422	149			

Scan QR code above for ordering format and more detailed information

### THE INFORMATION YOU NEED - ALL IN ONE PLACE

Visit [www.atlasled.com](http://www.atlasled.com) or scan QR code more information, including cut sheets, case studies, installation videos, instruction sheets, savings information, IES files, lighting calculation tools and more.



# Eagles Series Medium LED Area Light




- Easy to install, easy to maintain
- Optical Grade Individual Lenses
- Delivers Increased Footcandles



## ORDERING INFORMATION

SLPM	S	12-24L	T2	4K				
PRODUCT SERIES	SELECTABLE	LUMEN PACKAGE	DISTRIBUTION	COLOR TEMP.	VOLTAGE	COLOR RENDERING	FIXTURE COLOR	OPTIONS
SLPM = Eagle Series Area Light	blank = Fixed	6L = 6,000 Lumens 9L = 9,000 Lumens 12L = 12,000 Lumens 18L = 18,000 Lumens 24L = 24,000 Lumens 30L = 30,000 Lumens 36L = 36,000 Lumens 43L = 43,000 Lumens 50L = 50,000 Lumens	T2 = Type 2 T3 = Type 3 T5 = Type 5 FT = Forward Throw T2L = Type 2 Rotated Left T3L = Type 3 Rotated Left FTL = Forward Throw Rotated Left T2R = Type 2 Rotated Right T3R = Type 3 Rotated Right FTR = Forward Throw Rotated Right	3K = 3000K 4K = 4000K 45K = 4500K 5K = 5000K	Blank = 120-277 4 = 347/480	Blank = 70CRI	Blank = Bronze BK = Black SL = Silver WT = White	PR = 7 Pin Photocell Receptacle SP = Surge Protection IC = Integrated Motion Control* M = Motion  *Only available in 120-277V


## OPTIONS AND ACCESSORIES

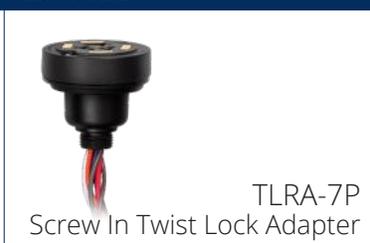


## INSTALLATION




## MULTIPLE DISTRIBUTION PATTERNS - ROTATABLE OPTICS




**TYPE II**



**TYPE III**



**TYPE FT**



**TYPE V**

## PERFORMANCE DATA

HOUSING	UNIT	DISTRIBUTION	CRI	3000K CCT		4000K CCT		4500K CCT		5000K CCT		WATTAGE	REPLACES UP TO
				DELIVERED LUMENS	EFFICACY (LPW)								
<b>FIXED</b>													
SLPM	6L	T2	70	5,908	153	6,067	158	6,093	159	6,152	160	39	175W MH
		T3	70	5,824	151	5,981	155	6,006	155	6,065	157		
		FT	70	5,712	148	5,866	152	5,891	153	5,948	154		
		T5	70	5,848	152	6,005	156	6,031	156	6,090	158		
	9L	T2	70	9,155	159	9,401	163	9,442	164	9,533	166	58	175W MH
		T3	70	9,082	158	9,326	162	9,366	163	9,457	164		
		FT	70	8,866	154	9,104	158	9,144	159	9,232	160		
		T5	70	9,086	158	9,330	162	9,370	163	9,461	164		
	12L	T2	70	12,030	160	12,354	164	12,407	165	12,527	167	75	250W MH
		T3	70	11,900	159	12,220	163	12,272	164	12,391	165		
		FT	70	11,670	156	11,984	160	12,035	160	12,152	162		
		T5	70	11,950	159	12,271	164	12,324	164	12,444	166		
	18L	T2	70	19506	160	18509	152	18509	152	18,577	162	122	400W MH
		T3	70	19489	160	18493	152	18493	152	18,546	161		
		FT	70	19182	157	18201	149	18201	149	18,056	157		
		T5	70	19650	161	18645	153	18645	154	18,556	161		
	24L	T2	70	25447	149	24146	141	24146	141	24,616	154	171	400W MH
		T3	70	25425	149	24125	141	24125	141	24,596	154		
		FT	70	25025	146	23745	139	23745	139	23,981	150		
		T5	70	25635	150	24324	142	24324	142	24,637	154		
	30L	T2	70	29,450	140	30,242	144	30,372	145	30,666	146	210	750W MH
		T3	70	29,440	140	30,232	144	30,361	145	30,656	146		
		FT	70	28,750	137	29,523	141	29,650	141	29,937	143		
		T5	70	29,470	141	30,263	144	30,392	145	30,687	146		
	36L	T2	70	35,260	133	36,208	137	36,364	137	36,716	139	265	1000W MH
		T3	70	35,220	133	36,167	137	36,322	137	36,675	139		
		FT	70	34,490	131	35,418	134	35,570	135	35,914	136		
		T5	70	35,200	133	36,147	137	36,302	137	36,654	139		
43L	T2	70	42,200	121	43,335	124	43,521	125	43,943	126	348	1000W MH	
	T3	70	41,940	120	43,068	124	43,253	124	43,672	125			
	FT	70	41,300	118	42,411	122	42,593	122	43,006	123			
	T5	70	41,970	120	43,099	124	43,284	124	43,703	125			
50L	T2	70	n/a	n/a	48821	147	47962	144	47962	144	333	1000W MH	
	T3	70	n/a	n/a	49190	148	48324	145	48324	145			
	FT	70	n/a	n/a	47891	144	47048	142	47048	142			
	T5	70	n/a	n/a	49524	149	48652	146	48652	146			

Scan QR code above for ordering format and more detailed information

### THE INFORMATION YOU NEED - ALL IN ONE PLACE

Visit [www.atlasled.com](http://www.atlasled.com) or scan QR code more information, including cut sheets, case studies, installation videos, instruction sheets, savings information, IES files, lighting calculation tools and more.



# Eagles Series LED Area Light

Die Cast Aluminum Housing

Low Profile

External Air Flow Fins Dissipate Heat

Optional 7-Pin Controls Receptacle

Optional Surge Protector

Separate Driver Compartment for Cooler Operation & Longer Driver Life

Dimming

Advanced One Piece Optics with Multiple Distributions

- Type II
- Type III
- Type V
- Forward Throw
- Rotatable Optics

160+ Lumens per Watt

Labor Saving - Quick Mount Universal Bracket System Fits Any Pole

**PHILIPS ADVANCE**  
Quality LED Drivers

**200,000+ HOURS**

**UL LISTED**

**COLOR OPTIONS**

Bronze

Black

Silver

White

\*The majority of Atlas Lighting Products are assembled in USA facilities by an American Workforce utilizing both Domestic and Foreign components. | \*Qualifies for Buy American under ARRA



# Area Lighting Universal Bracket System

FITS ANY POLE

## Round Pole Adapter

	CATALOG#	DESCRIPTION	FINISH
	500-SLPMRPA	Round Pole Bracket	Bronze

Mounting Cleat Included with Fixture

## Square Pole Tenon Adapter - Up to 4 @ 90°

	CATALOG#	DESCRIPTION	FINISH
	500-SPTBZ	For Square Poles w/ Tenon	Bronze

Mounting Cleat Included with Fixture

## Square or Round Pole w/ Tenon - Up to 4 @ 90°

	CATALOG#	DESCRIPTION	FINISH
	500-RPT90BZ	For Tenon Up to 4 @ 90°	Bronze

Mounting Cleat Included with Fixture

## Square or Round Pole w/ Tenon - Up to 3 @ 120°

	CATALOG#	DESCRIPTION	FINISH
	500-RPT120BZ	For Tenon 3 @ 120°	Bronze

Mounting Cleat Included with Fixture

## Round Pole Top Adapter - Up to 4 @ 90°

	CATALOG#	DESCRIPTION	FINISH
	500-RPT-243490BZ	2.3" - 3.4" Pole Top O.D.	Bronze
	500-RPT-35490BZ	3.5" - 4" Pole Top O.D.	Bronze

Mounting Cleat Included with Fixture

## Round Pole Top Adapter - Up to 3 @ 120°

	CATALOG#	DESCRIPTION	FINISH
	500-RPT-2434120BZ	2.3" - 3.4" Pole Top O.D.	Bronze

Mounting Cleat Included with Fixture

## Wall Brackets

	CATALOG#	DESCRIPTION	FINISH
	500-WBBZ	Wall Mount Bracket	Bronze

Note: Not to be used as junction box.

## Wooden Pole Bracket

	CATALOG#	DESCRIPTION	FINISH
	500-WPBBZ	Wooden Pole Bracket	Bronze

Mounts to wood poles 8"-12" in diameter  
Note: Not to be used as junction box.

## Spoke Arm Brackets

	CATALOG#	DESCRIPTION	FINISH
	500-SAB21	Spoke Arm Bracket for SLP22	Bronze

## Angled Bracket

	CATALOG#	DESCRIPTION	FINISH
	500-AAB	Angled Bracket for SLP	Bronze

Note: All brackets are available in bronze, black, silver or white finishes.

Scan QR code above for more detailed information

### UNIVERSAL BRACKET SYSTEM



Scan QR code to view video

### CASE STUDIES



Scan QR code to view brochure

## THE INFORMATION YOU NEED - ALL IN ONE PLACE

Visit [www.atlasled.com](http://www.atlasled.com) or scan QR code more information, including cut sheets, case studies, installation videos, instruction sheets, savings information, IES files, lighting calculation tools and more.



# Poles

## American Made

Experience complete versatility, fast availability, and unmatched durability


## Complete Versatility

Endless Options, Made to Order

Completely configurable: choose from a wide variety of materials, finishes, sizes and styles to best suit your application and budget.



- Steel, Aluminum or Fiberglass
- Heights from under 10' to greater than 39' and everything in between
- Round, Square, Straight, Tapered, Hinged or Decorative

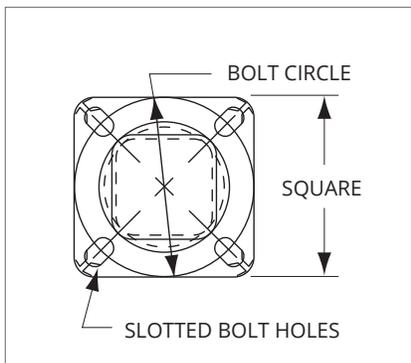

Wide offering of base plates with large range of customization to accommodate existing anchor bolts in retrofit applications.



## Fast Availability

### Industry-Leading Lead Times


Atlas Poles ship as soon as 5 days from the point of ordering. Our customer service representatives will walk you through the pole configuration process to ensure accuracy and quick order submission



## Unmatched Durability

### Stands Up to Harsh Environments

Designed and engineered for durability and provided as standard with our oven-baked DuraGrip Protection System. Also available with Atlas' proprietary DuraGrip+ Protection System for unmatched corrosion protection and extended warranty.

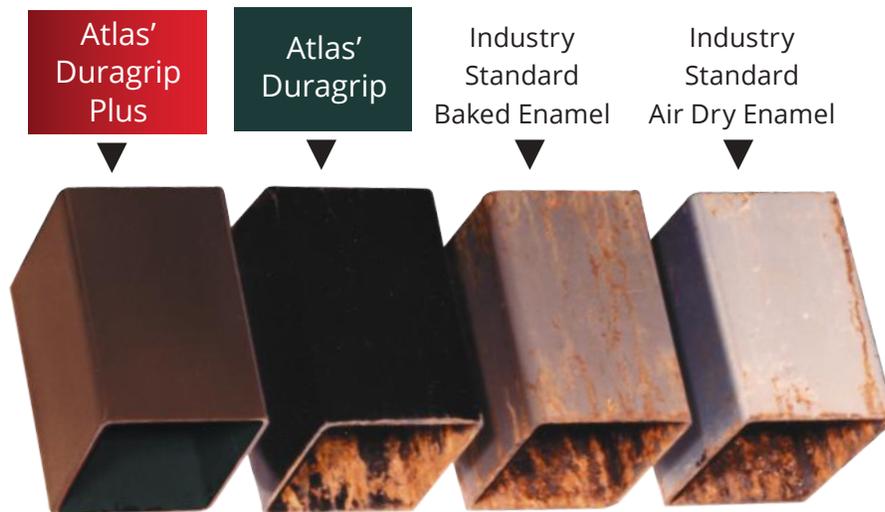

Poles After 1000hrs of Salt Spray Test

## THE INFORMATION YOU NEED - ALL IN ONE PLACE

Visit [www.atlasled.com](http://www.atlasled.com) or scan QR code more information, including cut sheets, case studies, installation videos, instruction sheets, savings information, IES files, lighting calculation tools and more.



# Area Lighting Poles



- Steel, Aluminum, Concrete, Fiberglass
- Square, Round, Straight, Tapered, etc.



THE FOLLOWING SQUARE STRAIGHT STEEL POLES ARE PART OF OUR QUICK SHIP PROGRAM:

PART #	HEIGHT	WIDTH	WALL THICKNESS
SSS12411BZQSLB5	12'	4"	11 gauge
SSS15411BZQSLB5	15'	4"	11 gauge
SSS20411BZQSLB5	20'	4"	11 gauge
SSS25411BZQSLB5	25'	4"	11 gauge

Scan QR code above for ordering format and more detailed information

- All Poles Ship Within (2) Business Days After Order Is Placed
- All Poles Drilled For (4) Fixtures At 90°
- All Poles Supplied With (3) Sets Of Plugs For Unused Holes
- All Poles Standard Bronze
- Maximum Of (10) Poles Per Order On All Quick Ship Orders
- Anchor Bolts Are Sent Same Day As Order Is Placed



\*The majority of Atlas Lighting Products are assembled in USA facilities by an American Workforce utilizing both Domestic and Foreign components. | \*Qualifies for Buy American under ARRA

# Dual Deal Luminaire/Pole Combo



## Simple & Easy

Atlas offers our top area light paired with our highest quality poles in a deal that offers



## EAGLE/POLE COMBO

HOUSING	UNIT	DISTRIBUTION	CRI	4000K CCT		4500K CCT		5000K CCT		WATTAGE	REPLACES UP TO
				DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)		
PXSLPS	9L	FT	70	8,717	139	8,541	136	8,541	136	63	175W
		T5	70	8,639	138	8,465	135	8,465	135		
	12L	FT	70	11,417	129	11,222	127	11,222	127	89	250W
		T5	70	11,578	131	11,380	129	11,380	129		
PXSLPM	18L	T3	70	18493	152	18493	152	18,546	161	122	400W MH
		FT	70	18201	149	18201	149	18,056	157		
		T5	70	18645	153	18645	154	18,556	161		
	24L	T3	70	24125	141	24125	141	24,596	154	171	400W MH
		FT	70	23745	139	23745	139	23,981	150		
		T5	70	24324	142	24324	142	24,637	154		
	43L	T3	70	43,068	124	43,253	124	43,672	125	275	1000W MH
		FT	70	42,411	122	42,593	122	43,006	123		
		T5	70	43,099	124	43,284	124	43,703	125		
	50L	T3	70	49190	148	48324	145	48324	145	333	1000W MH
		FT	70	47891	144	47048	142	47048	142		
		T5	70	49524	149	48652	146	48652	146		

Scan QR code above for more detailed information

## THE INFORMATION YOU NEED - ALL IN ONE PLACE

Visit [www.atlasled.com](http://www.atlasled.com) or scan QR code more information, including cut sheets, case studies, installation videos, instruction sheets, savings information, IES files, lighting calculation tools and more.





# Atlas

★ American Lighting

PO Box 2348 Burlington, NC 27216  
1406 S. Mebane Street Burlington, NC 27215  
800-849-8485 | Fax: 1-855-847-2794  
[www.atlasled.com](http://www.atlasled.com)

452-223 100323