


Full Bodied FLUORESCENT 4 & 6 Lamp



Hinged Optics for Quick Ballast Access

Quick Wire Access Panel

Full Bodied 20 Gauge Housing

 Miro-4 ≥ 95% Reflectance

Ordering Information




CATALOG #	# OF LAMPS	LAMP WATTS	VOLTS	BALLAST TYPE	OPTICS	LAMPS INCLUDED
IFS4454UEP5	4	54	Unv.	T5HO	Miro-4	F54T5HO/841
IFS4432UEI8	4	32	Unv.	T8	Miro-4	F32T8/841
IFS4654UEP5	6	54	Unv.	T5HO	Miro-4	F54T5HO/841
IFS4632UEI8	6	32	Unv.	T8	Miro-4	F32T8/841

Dimensions and Specifications

Overall Height: 3.88" (9.86 cm)

Overall Width: 4 Lamp - 12.63" (32.08 cm)
6 Lamp - 18.74" (47.60 cm)

Length: 48.25" (122.56 cm)

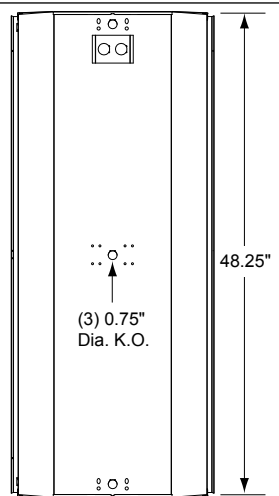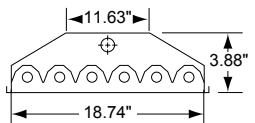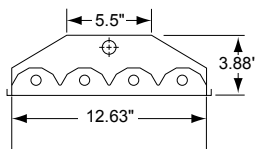

OPTIONS

SUFFIX #	DESCRIPTION	SUFFIX #	DESCRIPTION
3C*	3' Cord (No Plug)	N	No Lamps
3T*	3' 120V Cord & Plug	EB	Emergency Back-Up
3E*	3' 208V Cord & Plug	83	835 Lamps
3F*	3' 240V Cord & Plug	85	850 Lamps
3S*	3' 277V Cord & Plug	M	Motion Sensor**
3I*	3' 480V Cord & Plug	P	Pendant Mount
F	Inline Fusing		**T5 or PS Ballast Required

*Also Available in 6', 10' and 20' length

ACCESSORIES

CATALOG #	DESCRIPTION
CH36	Chain Set
CH36HFC	Chain Set w/Hammer-On Flange Clip
CA36	Cable Set
MS360	360° Motion Sensor

Ambient Temperature Fixture Rating

PART #	DESCRIPTION	12" CHAIN MOUNT
IFS4454UEP5	4 Lamp, 54w T5HO	122°F/50°C
IFS4454UEP5L	4 Lamp, 54w T5HO w/Lens	113°F/45°C
IFS4432UEI8	4 Lamp, 32w T8	122°F/50°C
IFS4432UEI8L	4 Lamp, 32w T8 w/Lens	113°F/45°C
IFS4654UEP5	6 Lamp, 54w T5HO	122°F/50°C
IFS4654UEP5L	6 Lamp, 54w T5HO w/Lens	104°F/40°C
IFS4632UEI8	6 Lamp, 32w T8	122°F/50°C
IFS4632UEI8L	6 Lamp, 32w T8 w/Lens	113°F/45°C



*The majority of Atlas Lighting Products are assembled in USA facilities by an American Workforce utilizing both Domestic and Foreign components

