

Atlas Wall Pak Pro

American Lighting

Project Information

Job Name

Fixture Type 64 Watt LED Die Cast Wall Pak

Catalog Number WPM64LED

Approved by

WPM64LED 64 Watt LED Wall Pak



3000K or warmer CCTs only

SPECIFICATIONS:

	WPM64LED3K	WPM64LED4K	WPM64LED	WPM64LED5K
Lumens:	6983	6983	6983	7237
Watts:	61.33	61.33	61.33	61.44
Lumens/Watt:	113.86	113.86	113.86	117.80
CRI:	80	80	80	80
CCT:	3000	4000	4500	5000
DLC Prod. ID:	P2Q0W81J	P7P4RZAK	PTK2WEO9	PTALGHVN

Construction:

Designed for commercial and industrial applications, providing cooler operating temperatures, brighter light and longer LED life. Manufactured w/ 100% pure aluminum & 0% remelt. Apertures for field or factory installed photocontrol.

Installation:

Labor saving quick mount box with apertures for continuous wiring.

Zero Glare:

Using the latest high brightness, high LED count technology, more usable light output is produced while eliminating glare. The fixture design directs more light down and forward without wasting lumens and offensive light.

Thermal Management:

Atlas Wall Pak Pro fixtures are designed as a complete system to optimize LED life and light output. The Patent Pending thermal stacking heat removal technology extracts heat from within the housing moving it away from LEDs and components. The lower temperatures result in long LED life (200,000+ hrs) and component life and also allows for higher light output.

Listings:

Luminaire is certified to UL/cUL Standards for Wet Locations
²WPM64LED3K and WPM64LED5K qualify for DesignLights Consortium Premium. WPM64LED and WPM64LED4K are DesignLights Consortium qualified. All are eligible for rebates from DLC member utilities.

AC Input:

120/208/240/277 V

Driver:

Constant current, Class 2, 120-277 VAC, 50-60 Hz
 High Efficiency – min. 88%
 Off-State Power: 0 Watts
 0-10 V Dimming

LEDs:

3000K, 4000K, 4500K, 5000K CCT
 Epoxy Guard™ protective conformal coated boards

Warranty: Five-year limited warranty

Testing:

Atlas LED luminaires have been tested by an independent laboratory in accordance with IESNA LM-79 & LM-80.

Photo Control:


For factory installed 120V button photo control add suffix PC to part number.
 480 Volt - For 480V add suffix 4 to part number.



WPM64LED Design is Protected by US Patent D772,474 and D752,274



DIMENSIONS:

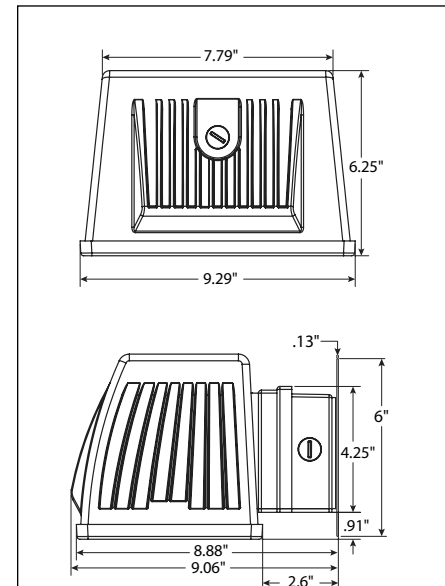

¹LED Life Span Based Upon LM-80 Test Results


Rebates and Incentives are available in many areas. Contact an Atlas Representative for more information.

ATLAS LIGHTING PRODUCTS, INC.

PO BOX 2348 | BURLINGTON, NC 27216
 800-849-8485 | FAX: 1-855-847-2794 | www.atlased.com


*The majority of Atlas Lighting Products are assembled in USA facilities by an American Workforce utilizing both Domestic and Foreign components. Meets Buy American requirements within the ARRA.

ORDERING FORMAT

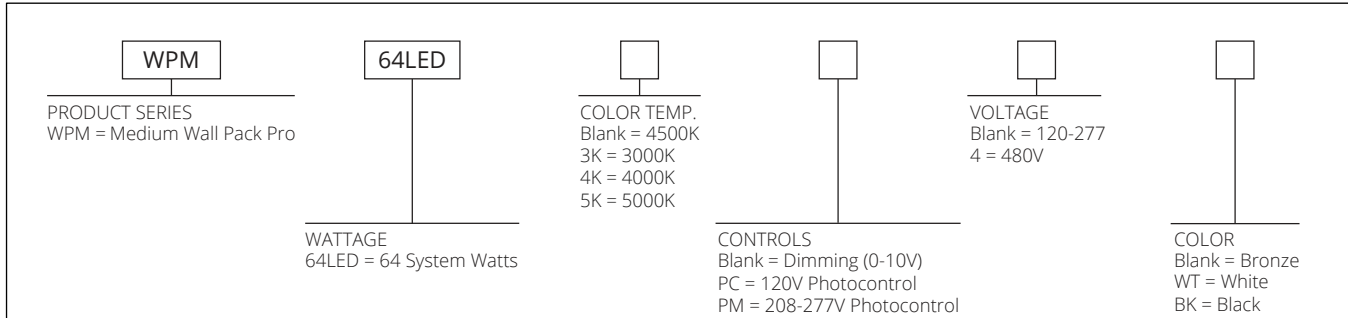


LABOR SAVING: QUICK & SECURE MOUNTING


Protected by US Patent D752,274

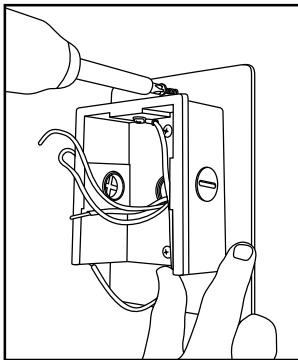


Secure Mounting Plate with back box to wall

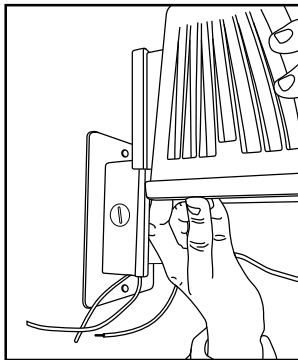

Slide fixture housing onto mounting box

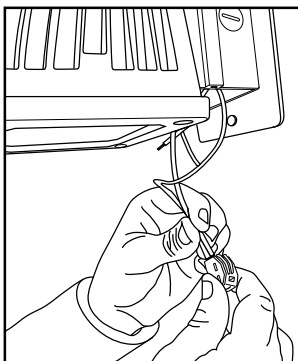


Connect wires & return them to mounting box

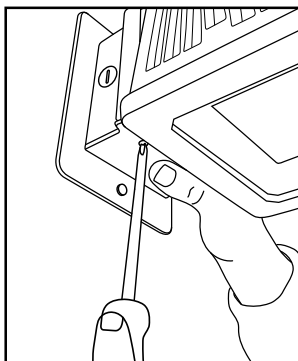

Replace bottom plate on quick mount box

PHOTOMETRIC

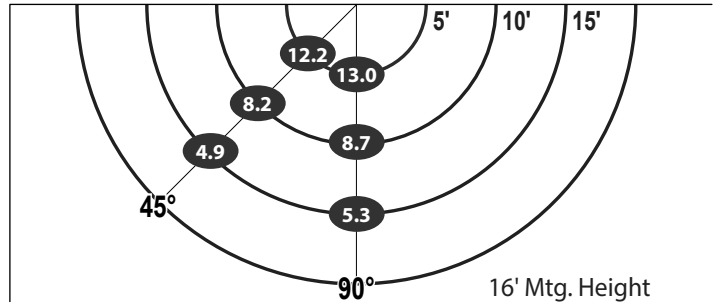

ENERGY SAVINGS

LED		HID			ANNUAL SAVINGS
WATTAGE	ANNUAL COST	SOURCE WATTAGE	TOTAL WATTAGE USED	ANNUAL COST	
64	\$28	200	232	\$128	\$100
64	\$28	250	285	\$150	\$122
64	\$28	400	458	\$226	\$198