

Wet Location FLUORESCENT

4' & 8'





- Tethered Ballast Tray
- Stainless Steel Mounting Clips
- Composite Housing
- Poured Gasket
- IP67 Rated
- NSF Rated
- NEMA 4x Rated

Ordering Information

CATALOG #	# OF LAMPS	FIXTURE LENGTH	LAMP WATTS	VOLTS	BALLAST TYPE	LAMPS INCLUDED
IFW4254UEP5	2	4'	54	Unv.	T5HOPS	F54T5HO/841
IFW4232UEI8	2	4'	32	Unv.	T8IS	F32T8/841
IFW8254UEP5	4	8'	54	Unv.	T5HOPS	F54T5HO/841
IFW8232UEI8	4	8'	32	Unv.	T8IS	F32T8/841

Dimensions and Specifications

- Overall Height:** 4.13" (10.49 cm)
- Overall Width:** 6.77" (17.20 cm)
- Length:** 4 foot - 51.65" (131.19 cm)
8 foot - 100" (254 cm)

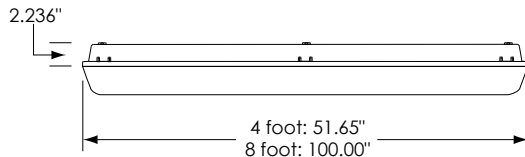

Options

SUFFIX #	DESCRIPTION	SUFFIX #	DESCRIPTION
3C*	3' Cord (No Plug)	L	Stainless Steel Latches
F	Inline Fusing	83	835 Lamps
N	No Lamps	85	850 Lamps

*Also Available in 6', 10' and 20' length

Accessories

CATALOG #	DESCRIPTION
MS360WL	Wet Location 360° Motion Sensor
80-271CMB	Ceiling Mount Bracket

Ambient Temperature Fixture Rating

PART #	DESCRIPTION	12" CHAIN MOUNT
IFW4254UEP5	4 ft., 2 Lamp, 54w T5HO	104°F/40°C
IFW4232UEI8	4 ft., 2 Lamp, 32w T8	86°F/30°C
IFW8254UEP5	8 ft., 4 Lamp, 54w T5HO	104°F/40°C
IFW8232UEI8	8 ft., 4 Lamp, 32w T8	95°F/35°C



*The majority of Atlas Lighting Products are assembled in USA facilities by an American Workforce utilizing both Domestic and Foreign components

