

PLM43LED

43 Watt LED Low Wattage Site Lighting Solution

REPLACES UP TO 175 MH

Low Cost Option - Lower Mounting Heights



- 5,334 **LUMENS**
- 43 **WATTS**
- 133 **LPW**
- 82 **CRI**
- 4500K **CCT**
- 0-10V **DIMMING**
- REC MNT HT**
12 FT to 14 FT



9.29"Wx6.25"Hx9.06"D
10 LBS


Design is Protected
by U.S. Patent No. D772,474

ORDERING INFORMATION

CATALOG #	DESCRIPTION	CCT	REPLACES UP TO	VOLTS
PLM43LED	43W LED Low Wattage Site Lighting Solution	4500K	175W MH	120-277

Specs shown are for 4500K CCT. Also available in 3000K, 4000K and 5000K. See Cut Sheet for more information.

FOOTCANDLES ON THE GROUND

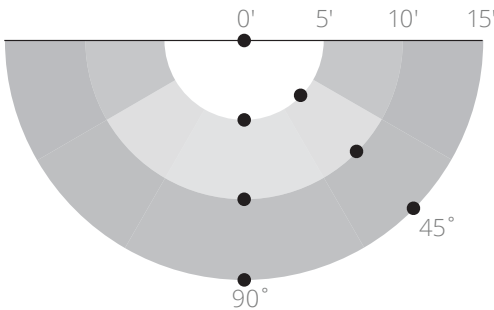

	12' Mtg Height		14' Mtg Height	
	90°	45°	90°	45°
0'	15.8	15.8	11.6	11.6
5'	13.9	12.5	10.6	9.8
10'	6.9	6.6	6.3	5.9
15'	3.3	3.1	3.3	3.2
Average	8.4		7.0	

OPTIONS

ADD SUFFIX #	DESCRIPTION	ADD SUFFIX #	DESCRIPTION
PC	120V Photocontrol	4	480V Driver
PM	208-277V Photocontrol		

ENERGY SAVINGS

LED		HID			
WATTAGE	ANNUAL COST	SOURCE WATTAGE	TOTAL WATTAGE USED	ANNUAL COST	ANNUAL SAVINGS
43	\$19	100	129	\$77	\$58
43	\$19	150	185	\$100	\$81
43	\$19	175	210	\$112	\$93



*The majority of Atlas Lighting Products are assembled in USA facilities by an American Workforce utilizing both Domestic and Foreign components

