



WSPL60LED WATTS: 60 DIMMING: 10-100%

CCT: 4500K CCT: 3000K
LUMENS: 6,635 LUMENS: 6,513
LPW: 111 CRI: 75 LPW: 112 CRI: 82

WSPL80LED WATTS: 80 DIMMING: 10-100%

CCT: 4500K CCT: 3000K
LUMENS: 8,396 LUMENS: 8,060
LPW: 108 CRI: 75 LPW: 106 CRI: 82



Ordering Information


CATALOG #	DESCRIPTION	VOLTS	COLOR TEMP
WSPL60LED	60W LED SlimPak Pro Wall Light	120-277	4500K
WSPL60LED3K	60W LED SlimPak Pro Wall Light	120-277	3000K
WSPL80LED	80W LED SlimPak Pro Wall Light	120-277	4500K
WSPL80LED3K	80W LED SlimPak Pro Wall Light	120-277	3000K

Options

ADD SUFFIX #	DESCRIPTION
PC	120V Photocontrol
PM	208-277V Photocontrol
EB	Emergency Backup*

*Emergency Back-Up available for WSPL40LED & WSPL60LED only and requires larger back housing
Note: Atlas uses only premium LED compatible photocontrols

WSPL60LED Rec. Mounting Height - 14-16 ft.

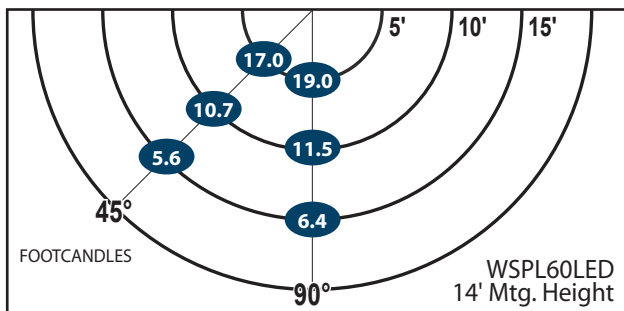


Mtg. Hgt.	FOOTCANDLES ON THE GROUND						Avg. FCs 450 SQ. FT.
	90°			45°			
	5'	10'	15'	5'	10'	15'	
14'	19.0	11.5	6.4	17.0	10.7	5.6	11.7
16'	14.8	10.3	6.2	13.5	9.5	5.6	10.0

Performance

- Slim Low Profile Design
- Attractive Architectural Styling
- Quick and Easy Mounting
- Bottom Hinged to Prevent Leakage

Dimensions and Specifications

Overall Height: 9.40" Depth: 5.25"
Overall Width: 8.88" Weight: 7.9 lbs.

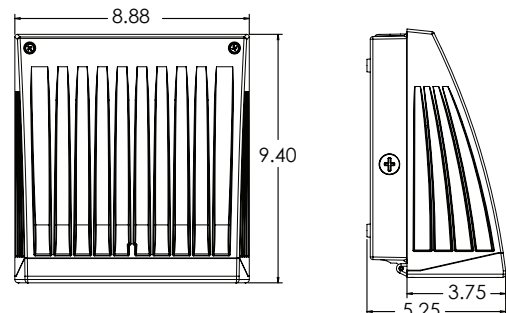

*The majority of Atlas Lighting Products are assembled in USA facilities by an American Workforce utilizing both Domestic and Foreign components

