



# Garage Light

## Project Information

Job Name

Fixture Type 25W LED Low Profile Parking Garage Light

Catalog Number PGM25LED Series

Approved by



3000K or warmer CCTs only

## SPECIFICATIONS:

	PGM25LED3K	PGM25LED4K	PGM25LED	PGM25LED5K
<b>Lumens:</b>	3387	3387	3387	3524
<b>Watts:</b>	24.52	24.52	24.52	24.55
<b>Lumens/Watt:</b>	138.16	138.16	138.16	143.57
<b>CRI:</b>	83.0	83.0	83.0	83.9
<b>CCT:</b>	3106	4000	4500	5021
<b>DLC Prod. ID:</b>	PQSF6E0	PJ6YE2LA	PQTVIS3T	PXZE7PY0

### Construction:

Designed for commercial and industrial applications, providing cooler operating temperatures, brighter light and longer LED life. Apertures for continuous wiring. Housing is hinged for quick and easy mounting and entrance.

### Zero Glare:

Using the latest high brightness, high LED count technology, more usable light output is produced while eliminating glare. The high transmission lens, with 91% efficiency, is high impact, scratch resistant and protects the LEDs. At the same time, it delivers improved visual comfort by eliminating any glare and providing a wider smoother and more uniform light output.

### Thermal Management:

The Atlas Low Profile Parking Garage Light is designed as a complete system to optimize LED life and light output. The Patent Pending thermal stacking heat removal technology extracts heat from within the housing moving it away from LEDs and components. The lower temperatures result in long LED life (200,000+ hrs) and component life and also allows for higher light output.

### Listings:

Luminaire is certified to UL/cUL Standards for Wet Locations  
IDA Listed (3000K or warmer CCTs only)  
DesignLights Consortium Premium qualified luminaire, eligible for rebates from DLC member utilities.

### AC Input:

120/208/240/277 V

### Driver:

Constant current, Class 2 120-277 VAC, 47-63Hz  
High Efficiency – min. 85%  
Off-State Power: 0 Watts  
Dimming 0-10V

### LEDs:

3000K | 4000K | 4500K | 5000K CCT

Epoxy Guard™ protective conformal coated boards

Atlas LEDs provide higher lumen output, greater energy efficiency and more reliable fixture performance. They are tested and binned at 700mA which is the actual operating current used in Atlas LED luminaires, giving a better representation of actual performance.

### Temperatures:

Min Start: -35°C Max: 50°C

### Warranty:

Five-year limited warranty

### Testing:

Atlas LED luminaires have been tested by an independent laboratory in accordance with IESNA LM-79 & LM-80.

### Weight:


10.0 lbs.

### Options:

**Emergency Battery Back Up:** For factory installed Emergency Back-Up add suffix EB to part number. Provides emergency illumination (1,580 lumens) for a minimum of 90 minutes. (Requires larger back housing.)



## DIMENSIONS:

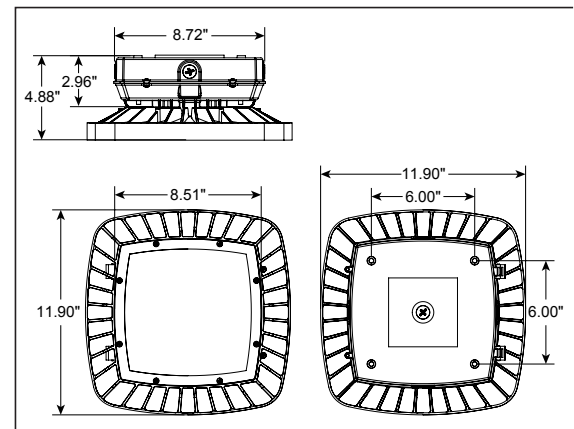

<sup>1</sup>LED Life Span Based Upon LM-80 Test Results

**Rebates and Incentives are available in many areas. Contact an Atlas Representative for more information.**

## ATLAS LIGHTING PRODUCTS, INC.

PO BOX 2348 | BURLINGTON, NC 27216  
800-849-8485 | FAX: 1-855-847-2794 | www.atlasled.com

\*The majority of Atlas Lighting Products are assembled in USA facilities by an American Workforce utilizing both Domestic and Foreign components. Meets Buy American requirements within the ARRA.



# Garage Light

**PGM25LED Series**  
25W LED Low Profile Parking Garage Light

## ORDERING FORMAT

