




# FIELD ADJUSTABLE LED EDGE LIT FLAT PANELS

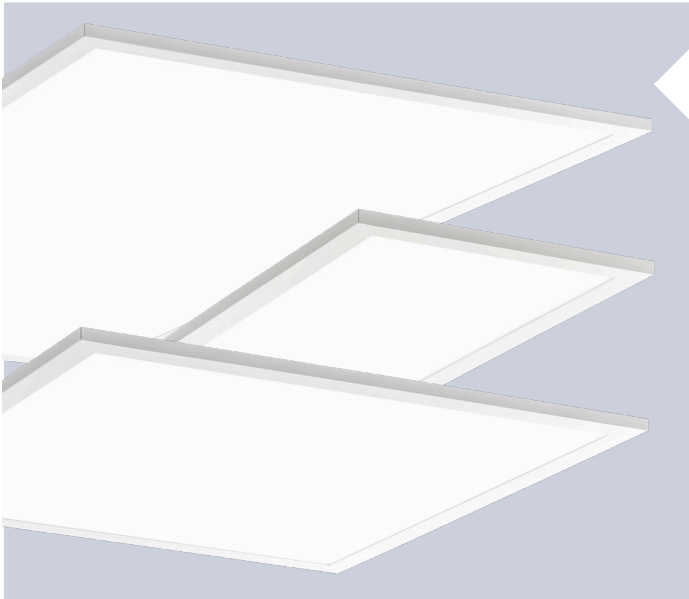

1'x4' | 2'x2' | 2'x4'

25-45 WATTS ADJUSTABLE

- Field adjustable lumen output and color temp.
- Quick connects for easy installation
- PMMA lens designed not to yellow
- 120° beam angle for smooth and uniform light
- Ultra thin design < 2" height

## PERFORMANCE DATA

FAELP14LED	25 Watts (adjustable)			30 Watts (adjustable)			40 Watts (adjustable)		
<b>CCT:</b>	3500K	4000K	5000K	3500K	4000K	5000K	3500K	4000K	5000K
<b>Lumens:</b>	3,102	3,274	3,154	3,513	3,748	3,570	4,398	4,767	4,464
<b>LpW:</b>	121	132	123	118	130	120	110	125	112
<b>CRI:</b>	>80			>80			>80		

FAELP22LED	25 Watts (adjustable)			30 Watts (adjustable)			40 Watts (adjustable)		
<b>CCT:</b>	3500K	4000K	5000K	3500K	4000K	5000K	3500K	4000K	5000K
<b>Lumens:</b>	3,187	3,385	3,259	3,599	3,863	3,683	4,412	4,856	4,542
<b>LpW:</b>	121	133	122	117	131	119	109	126	111
<b>CRI:</b>	>80			>80			>80		

FAELP24LED	30 Watts (adjustable)			35 Watts (adjustable)			45 Watts (adjustable)		
<b>CCT:</b>	3500K	4000K	5000K	3500K	4000K	5000K	3500K	4000K	5000K
<b>Lumens:</b>	3,248	3,413	3,409	3,702	3,921	3,891	4,698	5,046	4,971
<b>LpW:</b>	112	120	117	109	119	115	104	115	110
<b>CRI:</b>	>80			>80			>80		

OPTIONS	
ADD SUFFIX #	DESCRIPTION
EB	Emergency Back-Up

ACCESSORIES	
ADD SUFFIX #	DESCRIPTION
SMK14	Frame Kits for Surface Mount Panels