



PROJECT INFORMATION

JOB NAME	
FIXTURE TYPE	Architectural Emergency Light
CATALOG NUMBER	
APPROVED BY	

SPECIFICATIONS

Construction:

Decorative, low-profile, architectural design
 Long-life, efficient ultra-bright white LED
 Mirror-bright reflector and prismatic polycarbonate refractor
 Die-cast aluminum housing
 Durable powder-coated finish
 Sealed and gasketed

Electrical:

120/277 VAC Dual Rated
 Charge rate/power "ON" LED indicator light and push to test switch for mandated code compliance testing
 4.8V long-life, maintenance-free, rechargeable NiCd battery
 Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination
 Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours
 Photocell sensor included as a standard
 Cold-weather unit for use in temperatures as low as -30°C

Temperatures:

Min Start: 20°C Max: 40°C

Installation:

Surface mount via easy connect back plate that fits most standard size junction boxes
 Universal K/O pattern on back plate for wall mount

Listings:

Luminaire is certified to UL/cUL Standards for Wet Locations

Testing:

Atlas LED luminaires have been tested by an independent laboratory in accordance with IESNA LM-79 & LM-80.


Warranty:

Five-year limited warranty



DIMENSIONS

Weight: 4.5 lbs.

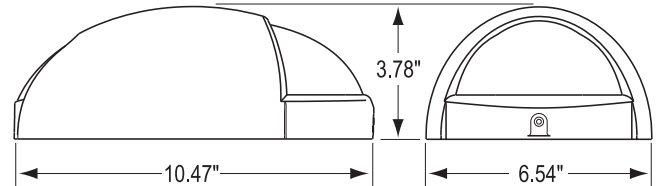

ORDERING INFORMATION

CATALOG #	DESCRIPTION	FINISH	VOLTS
ERD12BZ	Architectural LED Emergency Light w/ Photocell	Bronze	120/277