



Independence Series Low Profile Canopy

PROJECT INFORMATION

JOB NAME	
FIXTURE TYPE	Independence Low Profile Canopy
CATALOG NUMBER	
APPROVED BY	

SPECIFICATIONS

Construction:

Designed for commercial and industrial applications, providing cooler operating temperatures, brighter light and longer LED life. Apertures for continuous wiring. Housing is hinged for quick and easy mounting and entrance.

Zero Glare:

Using the latest high brightness, high LED count technology, more usable light output is produced while eliminating glare. The high transmission lens, with 91% efficiency, is high impact, scratch resistant and protects the LEDs. At the same time, it delivers improved visual comfort by eliminating any glare and providing a wider smoother and more uniform light output.

Thermal Management:

The Atlas Low Profile Canopy Light is designed as a complete system to optimize LED life and light output. The Patent Pending thermal stacking heat removal technology extracts heat from within the housing moving it away from LEDs and components. The lower temperatures result in long LED life (200,000+ hrs¹) and component life and also allows for higher light output.

Listings:

Luminaire is certified to UL/cUL Standards for Wet Locations

DesignLights Consortium qualified luminaire, eligible for rebates from DLC member utilities. *See chart on other next page for qualifying products.*

IP66 Rated

AC Input: 120/208/240/277V

Driver:

Constant current, Class 2, 120-277 VAC, 50-60 Hz

High Efficiency – min. 84%

Off-State Power: 0 Watts

0-10 V Dimming

LEDs:

4000K | 4500K | 5000K CCT

Epoxy Guard™ protective conformal coated boards

Temperatures:

Min Start: -35°C Max: 50°C

Testing:

Atlas LED luminaires have been tested by an independent laboratory in accordance with IESNA LM-79 & LM-80.

Warranty: Five-year limited warranty





BUY AMERICAN



COMPLIANT*

DIMENSIONS

Weight: 6.4 lbs.

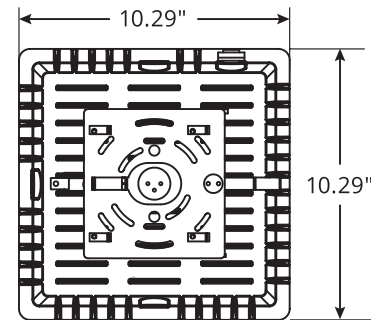

¹LED Life Span Based Upon LM-70 Test Results

Atlas Lighting Products, Inc.

PO Box 2348 | Burlington, NC 27216

800-849-8485 | fax: 1-855-847-2794 | www.atlasled.com

**Rebates and Incentives are available in many areas.
Contact an Atlas Representative for more information.**

*The majority of Atlas Lighting Products are assembled in USA facilities by an American Workforce utilizing both Domestic and Foreign components. Meets Buy American requirements within the ARRA.



Independence Series
Low Profile Canopy



ORDERING INFORMATION

LPC	5L	45K			
PRODUCT SERIES	WATTAGE	COLOR TEMP.	CONTROLS	VOLTAGE	FIXTURE COLOR
LPC = Low Profile Canopy	5L = 5,000 Lumens 7L = 7,000 Lumens	4K = 4000K 45K = 4500K 5K = 5000K	Blank = Dimming (0-10V)	Blank = 120-277	Blank = Bronze WT = White* BK = Black* SL = Silver* <i>*optional with adder</i>

PERFORMANCE DATA

UNIT	CRI	4000K CCT		4500K CCT		5000K CCT		WATTAGE	REPLACES UP TO
		DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)		
5L	80	5,100	143	5,100	143	5,101	143	36	175W MH
7L	80	7,030	134	7,001	134	7001	134	52	250W MH

DLC PRODUCT INFORMATION

UNIT	4000K CCT		4500K CCT		5000K CCT	
	DLC PRODUCT ID	CLASSIFICATION	DLC PRODUCT ID	CLASSIFICATION	DLC PRODUCT ID	CLASSIFICATION
LPC5L	P11IA3IS	Premium	PWVOTBMO	Premium	PWX991QB	Premium
LPC7L	PADS38RH	Premium	PKU5UB24	Premium	PPV12129	Premium