



Wet Location 360° Motion Sensor

PROJECT INFORMATION

JOB NAME	
FIXTURE TYPE	Wet Location 360° Motion Sensor
CATALOG NUMBER	MS360WL
APPROVED BY	

SPECIFICATIONS

Electrical:

- Input Voltage: 120/277/347 VAC
- Operational Frequencies: 50/60Hz
- Wire Designation: Line-Black, Load-Red, Neutral-White
- Load Rating:

800VA @ 120VAC	}	Ballast/Driver
1200VA @ 277VAC		
1500VA @ 347VAC		
- Mounted: 1/4 HP Motor Load @ 120V

Environmental:

- Operating Temperature Range: -40 F to 158 F (-40 C to 70 C)
- For use in wet location environments (IP65)
- Operating Humidity: 20% to 90% non-condensing
- IP65 Rated

Construction:

- High-impact Housing
- Injection Molded Plastic

Optical:

- Two interchangeable lenses (HB Applications, LB Applications)
- Lenses sealed and gasketed
- Lens choices for mounting between 20 and 40 feet

Specifications:

- Overall height: 4.48" (11.37 cm)
- Width: 4.09" (10.38 cm)
- Depth: 1.94" (4.92 cm)
- Color: White
- Listings: UL and cUL, Photoelectric Switch, CEC Title 24 Compliant

Controls:

- Timer Setting: 30 seconds - 20 minutes

Range and Coverage:

- LB - 10'-24' mounting height, 24' in diameter coverage at 20' height.
- HB - 20'-40' mounting height, 68' in diameter coverage at 40' height.




BUY AMERICAN



COMPLIANT*


DIMENSIONS

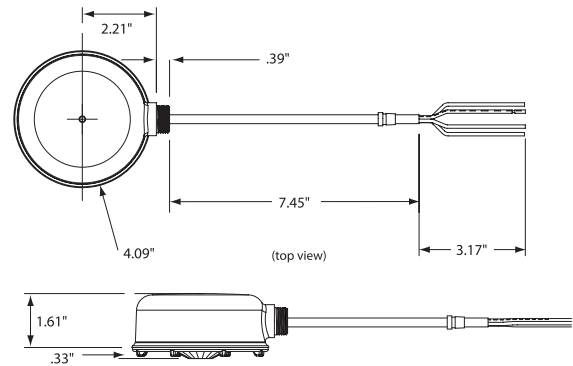

ORDERING INFORMATION

CATALOG #	DESCRIPTION	STD. PKG.
MS360WL	Wet Location 360° Motion Sensor (Standard with LB Lens)	1
MS360WL-HB	Wet Location 360° Motion Sensor w/ HB Lens	1

COVERAGE

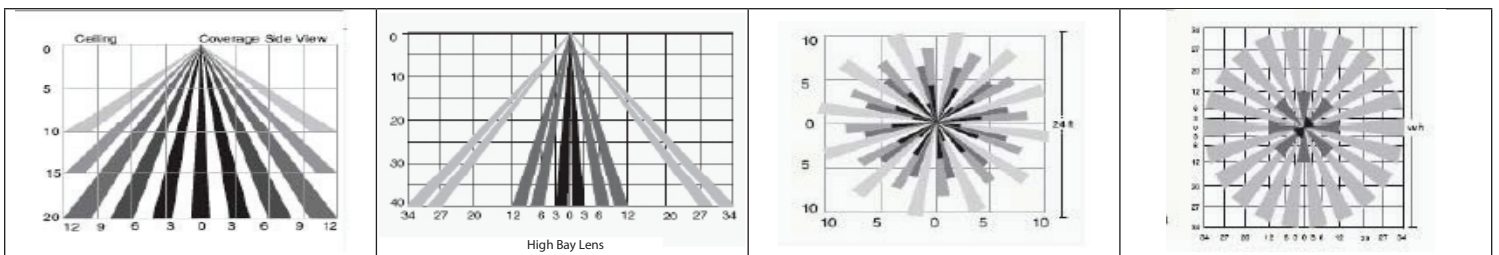

Atlas Lighting Products, Inc.

PO Box 2348 | Burlington, NC 27216
800-849-8485 | fax: 1-855-847-2794 | www.atlasled.com

*The majority of Atlas Lighting Products are assembled in USA facilities by an American Workforce utilizing both Domestic and Foreign components. Meets Buy American requirements within the ARRA.