



Origin Series
Motion Light



PROJECT INFORMATION

JOB NAME	
FIXTURE TYPE	Motion Light
CATALOG NUMBER	
APPROVED BY	

SPECIFICATIONS

Construction:

Die-cast aluminum housing

Passive infrared sensor

Easy to install and operate

Selectable Lumens and CCT:

Quick and easy to select and set up.

Selectable lumens: 2,000 - 3,000

Selectable CCTs: 3000K, 4000K and 5000K.

Electrical:

120VAC, 50/60Hz

Power Factor (PF): ≥0.9

Total Harmonic Distortion (THD): ≤20%

L70 Calculated Life: >50,000 Hours¹

Operating Temperature: -30°C (-22°F) – 50°C (122°F)

Listings:

UL listed for wet locations

IP65 Rated


Warranty:

Five-year limited warranty



DIMENSIONS

Weight: 1.54 lbs.

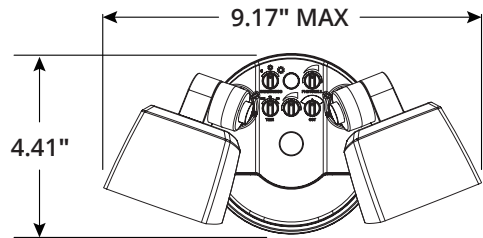

ORDERING INFORMATION

ORMS	SEL	1-3L			
PRODUCT SERIES	SELECTABLE	LUMEN PACKAGE	COLOR TEMP.	VOLTAGE	FIXTURE COLOR
ORMS = Motion	SEL = Selectable	1-3L = 1,000 - 3,000 Lumens Selectable	blank = Selectable 3000K, 4000K, 5000K	Blank = 120V	Blank = Bronze WT = White

PERFORMANCE DATA

UNIT	CRI	SELECTABLE 3000K CCT		SELECTABLE 4000K CCT		SELECTABLE 5000K CCT		WATTAGE
		DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	
ORMSSEL1-3L	>80	2,200	122	2,350	131	2,300	127	18
		3,025	121	3,250	130	3,150	126	25

¹LED Life Span Based Upon LM-80 Test Results