



MODEL #: ORWPL10L4K

UPC #: 765364023910

Large Wall Pack



Electrical Specifications

- Input Wattage: 99W
- Efficacy: 160 LpW
- AC Input: 120/208/240/277 V
- Driver: Constant current, Class 2, 120-277VAC 50/60Hz

Lighting Specifications

- Total Lumens: 15,797
- Color Temperature: 4000K
- Color Rendering Index: 70

Housing Specifications


- Die-cast aluminum housing
- UV stabilized power coated finish
- Color: Bronze
- Lifespan: 50,000 hours

Lens Specifications

- Borosilicate glass lens

Model	Watts	Lumens	Volts	Color Temp.
ORWPL10L4K	99	15,797	120-277	4000K

Photometrics

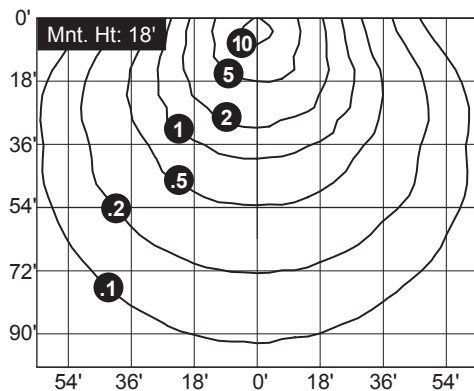

Light Loss Factor	1.00
Total Lumens	15797
Mounting Height	18'
Max. Calculated Value	11.20Fc

Listings

- UL/cUL standards for wet locations
- DLC Premium qualified luminaire, eligible for rebates from DLC member utilities.
DLC Prod. ID: PLKAH1T6BARF

Warranty

- 5-Year limited warranty



origin

BY ATLAS
LIGHTING

PROJECT INFORMATION


MODEL #: ORWPL10L4K

UPC #: 765364023910

Large Wall Pack


Dimensions

Product Dimensions

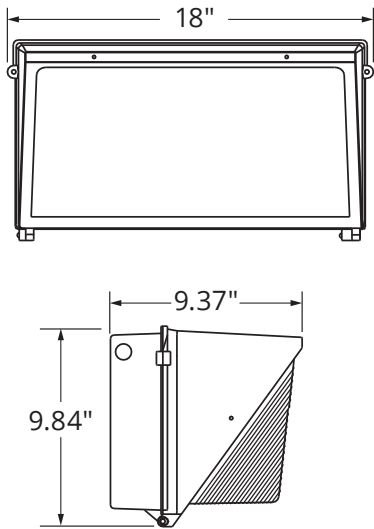


Carton Dimensions

Weight: 14.9 lbs.

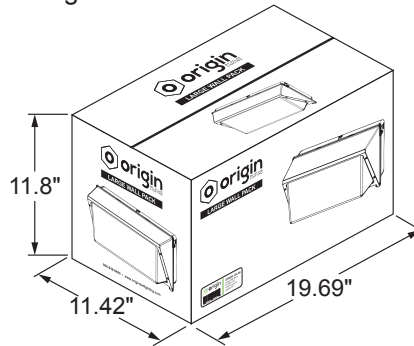



Pallet Dimensions

Qty: 40

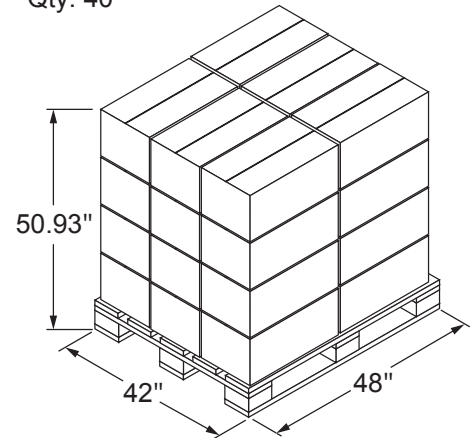

Installation

1. Before starting ensure that the power is disconnected.
2. Unpack fixture and ensure that there are no damaged parts.
3. This fixture is intended to be mounted on a vertical wall.
4. Open the fixture by removing the 2 tamper proof screws on the front frame assembly.
5. Remove the frame assembly by sliding sideways off the hinge pins.
6. Prepare the back plate for mounting by drilling or knocking the appropriate holes.
7. Line up the back plate in the desired location and mount securely.
8. If using a junction box, bring the branch circuit wire through the knocked-out hole in the rear of the fixture.
9. If using an electrical conduit, remove the screw cap from the desired conduit hole and replace with conduit pipe.
10. Connect the power leads with the included wire nuts as seen below. Black to Black (Hot), White to White (Neutral), Green to Green (Ground).
11. Reattach the front frame and glass LED assembly using the tamper proof screws.

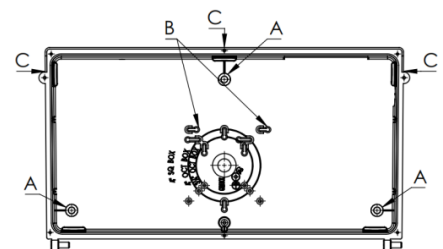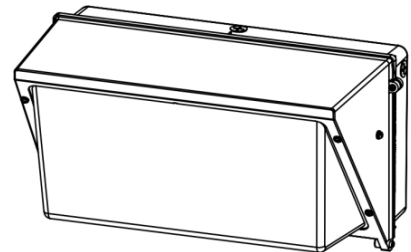

A: 5/16" dia. Knockouts
B: 5/32" dia. Knockouts
C: 1/2" NPS tapped holes