





origin
BY ATLAS
LIGHTING

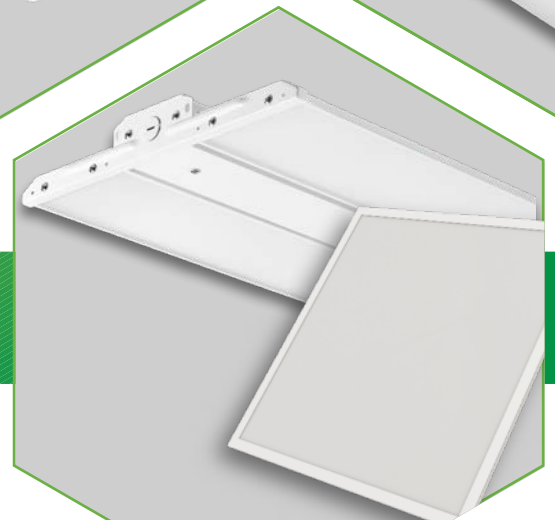

2021
CATALOG

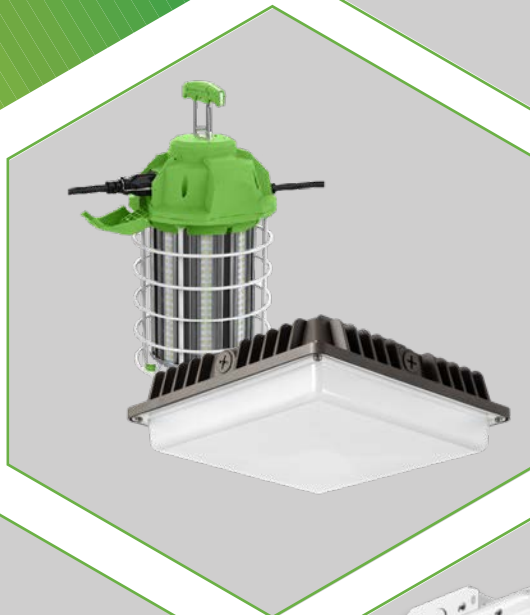

20 – 100 watts • 2,000 – 10,000 lumens



Features

- Polycarbonate housing
- Polycarbonate lens
- Lifespan: 50,000 hours
- UL/cUL standards for wet locations
- 5-Year limited warranty

Small Wall Pack

Dimensions: 6.1"W x 9.64"H x 3.28"D

MODEL	UPC #	WATTS	LUMENS	LPW	CRI	COLOR TEMP.	VOLTS	WEIGHT
ORTP2L4K	765364023880	20	2,000	100	80	4000K	120-277	1.3 lbs.
ORTP2L4KPC*	765364027291	20	2,000	100	80	4000K	120-277	1.3 lbs.

*Includes Photocontrol



Features

- Die-cast aluminum housing
- Polycarbonate lens
- Lifespan: 50,000 hours
- UL/cUL standards for wet locations
- 5-Year limited warranty

Medium Wall Pack

Dimensions: 14.4"W x 9.29"H x 7.13"D

MODEL	UPC #	WATTS	LUMENS	LPW	CRI	COLOR TEMP.	DIMMING	VOLTS	WEIGHT
ORWP5L4K	765364023897	40	5,000	125	80	4000K	0-10V	120-277	6.3 lbs.
ORWP10L4K	765364023903	100	10,000	100	80	4000K	0-10V	120-277	6.3 lbs.



Features

- Die-cast aluminum housing
- Borosilicate glass lens
- Lifespan: 50,000 hours
- UL/cUL standards for wet locations
- 5-Year limited warranty

Large Wall Pack

Dimensions: 18"W x 9.84"H x 9.37"D

MODEL	UPC #	WATTS	LUMENS	LPW	CRI	COLOR TEMP.	VOLTS	WEIGHT
ORWPL10L4K	765364023910	99	10,000	101	80	4000K	120-277	14.9 lbs.



15 – 100 watts • 2,000 – 14,000 lumens Selectable

Features

- Die-cast aluminum housing
- Includes Photocontrol
- 3000K, 4000K, 5000K Selectable CCT
- Lifespan: 50,000 hours
- ETL/cETL listed for wet locations
- 5-Year limited warranty



Dimensions: 7.17"W x 9.13"H x 3.5"D

Medium Wall Pack

MODEL	UPC #	WATTS	LUMENS	CRI	COLOR TEMP.	DIMMING	VOLTS	WEIGHT
ORWPSEL2-6LPC	765364027178	2-6L Selectable		80	Selectable	0-10V	120-277	6.3 lbs.
ORWPSEL5-14LPC	765364027185	5-14L Selectable		80	Selectable	0-10V	120-277	6.3 lbs.

40 watts • 5,000 lumens

Features

- Die-cast aluminum housing
- Lifespan: 50,000 hours
- UL/cUL standards for wet locations
- 5-Year limited warranty



Dimensions: 10.29"W x 3.9"H x 10.29"D

Fixed 9x9 Canopy

MODEL	UPC #	WATTS	LUMENS	LPW	CRI	COLOR TEMP.	VOLTS	WEIGHT
ORC5L4K	765364023958	40	5,000	125	80	4000K	120-277	6.3 lbs.



30 – 80 watts • 3,000 – 10,000 lumens



Features

- Die-cast aluminum housing
- Lifespan: 50,000 hours
- ETL/cETL listed for wet locations
- 5-Year limited warranty

Small Flood Light

Dimensions: 5.67"W x 8"H x 3.15"D

MODEL	UPC #	WATTS	LUMENS	LPW	CRI	COLOR TEMP.	VOLTS	WEIGHT
ORSF3L4K	765364023927	30	3,000	100	80	4000K	120-277	2.5 lbs.



Features

- Die-cast aluminum housing
- Lifespan: 50,000 hours
- ETL/cETL listed for wet locations
- 5-Year limited warranty

Small Flood Light

Dimensions: 7.17"W x 9.13"H x 3.5"D

MODEL	UPC	WATTS	LUMENS	LPW	CRI	COLOR TEMP.	VOLTS	WEIGHT
ORSF6L4K	765364023934	50	6,000	120	80	4000K	120-277	3.9 lbs.



Features

- Die-cast aluminum housing
- Lifespan: 50,000 hours
- ETL/cETL listed for wet locations
- 5-Year limited warranty

Medium Flood Light

Dimensions: 8.07"W x 11.3"H x 4.25"D

MODEL	UPC #	WATTS	LUMENS	LPW	CRI	COLOR TEMP.	VOLTS	WEIGHT
ORMF10L4K	765364023941	80	10,000	125	80	4000K	120-277	5.9 lbs.

14 – 96 watts • 2,000 – 13,000 lumens • Selectable

Features

- Die-cast aluminum housing
- Lifespan: 50,000 hours
- 3000K, 4000K, 5000K Selectable CCT
- ETL/cETL listed for wet locations
- 5-Year limited warranty



Dimensions: 5.27"W x 5.24"H x 3.03"D

Small Selectable Flood Light

MODEL	UPC #	WATTS	LUMENS	LPW	CRI	COLOR TEMP.	VOLTS	WEIGHT
ORSF2LSEL	765364027123	14	1,928	133	80	Selectable	120-277	1.32 lbs.

Features

- Die-cast aluminum housing
- Includes Photocontrol
- 3000K, 4000K, 5000K Selectable CCT
- Lifespan: 50,000 hours
- ETL/cETL listed for wet locations
- 5-Year limited warranty



Dimensions: 8.74"W x 9.4"H x 4.88"D

Medium Selectable Flood Light with PC

MODEL	UPC	WATTS	LUMENS	LPW	CRI	COLOR TEMP.	VOLTS	WEIGHT
ORMF4LSELPC	765364027130	26	3,855	150	80	Selectable	120-277	4.41 lbs.
ORMF6LSELPC	765364027147	45	6,583	146	80	Selectable	120-277	4.52 lbs.

Features

- Die-cast aluminum housing
- Includes Photocontrol
- 3000K, 4000K, 5000K Selectable CCT
- Lifespan: 50,000 hours
- ETL/cETL listed for wet locations
- 5-Year limited warranty



Dimensions: 11.3"W x 10.6"H x 5.94"D

Large Selectable Flood Light with PC

MODEL	UPC	WATTS	LUMENS	LPW	CRI	COLOR TEMP.	VOLTS	WEIGHT
ORLF10LSELPC	765364027154	72	10,181	146	80	Selectable	120-277	5.95 lbs.
ORLF14LSELPC	765364027161	91	13,037	143	80	Selectable	120-277	6.06 lbs.

5 – 20 watts • 500 – 2,000 lumens



Features

- Die-cast aluminum housing
- Lifespan: 50,000 hours
- ETL/cETL listed for wet locations
- 5-Year limited warranty

Bullet Flood Light

MODEL	UPC #	WATTS	LUMENS	LPW	CRI	COLOR TEMP.	VOLTS	WEIGHT
Small Bullet Flood Light						Dimensions: 2.48"W x 5.98"D		
ORSB500L4K	765364027109	5	553	111	70	4000K	120-240	2.65 lbs.
Large Bullet Flood Light						Dimensions: 5.43"W x 8.78"D		
ORLB2L4K	765364023934	20	2,047	105	70	4000K	120-277	3.13 lbs.

21 watts • 2,000 lumens



Features

- Die-cast aluminum housing
- Lifespan: 50,000 hours
- ETL/cETL listed for wet locations
- 5-Year limited warranty

LED Security Light With Motion Sensor

Dimensions: 10.43"W x 6.22"H x 6.79"D

MODEL	UPC #	WATTS	LUMENS	LPW	CRI	COLOR TEMP.	COLOR	VOLTS	WEIGHT
ORMS2L2404K	765364027093	21	2,042	97	80	4000K	Bronze	120	2.86 lbs.
ORMS2L2404KWT	765364027604	21	2,042	97	80	4000K	White	120	2.86 lbs.



15 – 48 watts Selectable

Features

- Die-cast aluminum housing
- Lifespan: 50,000 hours
- 3500K, 4000K, 5000K Selectable CCT
- UL/cUL standards for wet locations
- 5-Year limited warranty



Dimensions: 11.9/23.7"W x 1.6"H x 23.7/47.7"D

Selectable Back Lit Panels

MODEL	UPC #	WATTS	LUMENS	CRI	COLOR TEMP.	VOLTS	WEIGHT
1'x4'							
ORBLP14SEL2-4L	765364028915	15-33W Selectable	80	Selectable	120-277	4.96 lbs.	
2'x2'							
ORBLP22SEL2-4L	765364028922	15-33W Selectable	80	Selectable	120-277	4.63 lbs.	
2'x4'							
ORBLP24SEL3-6L	765364028939	28-48W Selectable	80	Selectable	120-277	8.82 lbs.	

5 – 21 watts • 500 – 2,100 lumens

Features

- Rigid 22 gauge post painted housing
- Lifespan: 50,000 hours
- UL/cUL standards for damp locations
- 5-Year limited warranty



Lensed Strip

MODEL	UPC #	WATTS	LUMENS	LPW	CRI	COLOR TEMP.	DIMMING	VOLTS
2' Lensed Strip				Dimensions: 3.347"W x 3.575"H x 22.21"L				
ORST22LL4K	765364027277	20	2,564	128	80	4000K	0-10V	120-277
4' Lensed Strip				Dimensions: 3.375"W x 3.313"H x 47.313"L				
ORST44LL4K	765364023835	40	4,500	113	80	4000K	0-10V	120-277
8' Lensed Strip				Dimensions: 3.347"W x 3.56"H x 94.2"L				
ORST88LL4K	765364027284	65	8,450	130	80	4000K	0-10V	120-277



40 watts • 4,500 lumens



Features

- Polycarbonate 1-piece
- Lightweight & durable
- Lifespan: 50,000 hours
- UL/cUL standards for wet locations
- 5-Year limited warranty

4' Vapor Tight

Dimensions: 4.95"W x 3.07"H x 47.39"L

MODEL	UPC #	WATTS	LUMENS	LPW	CRI	COLOR TEMP.	DIMMING	VOLTS	WEIGHT
ORVT44L4K	765364023842	40	4,500	112.5	80	4000K	0-10V	120-277	7.9 lbs.

128 - 215 watts • 17,000 - 27,000 lumens



Features

- High quality compact 2ft steel construction
- Acrylic resin lens
- Lifespan: 60,000 hours
- UL/cUL standards for damp locations
- 5-Year limited warranty

Linear High Bay

MODEL	UPC #	WATTS	LUMENS	LPW	CRI	COLOR TEMP.	DIMMING	VOLTS	WEIGHT
18,000 Lumen Package					Dimensions: 1.875" x 11.875" x 24.875"				
ORHB18L4K	765364027246	128	17,049	133	80	4000K	0-10V	120-277	7.3 lbs.
ORHB18L5K	765364028267	128	17,049	133	80	5000K	0-10V	120-277	7.3 lbs.
24,000 Lumen Package					Dimensions: 1.875" x 11.875" x 24.875"				
ORHB24L4K	765364027253	168	23,111	138	80	4000K	0-10V	120-277	8.2 lbs.
ORHB24L5K	765364028274	168	23,111	138	80	5000K	0-10V	120-277	8.2 lbs.
30,000 Lumen Package					Dimensions: 1.875" x 14.125" x 24.875"				
ORHB30L4K	765364027260	215	27,364	127	80	4000K	0-10V	120-277	9.1 lbs.
ORHB30L5K	765364028281	215	27,364	127	80	5000K	0-10V	120-277	9.1 lbs.

130 – 210 watts • 18,000 – 30,000 lumens

Features

- Die-cast aluminum housing
- Eye bolt mounting
- Lifespan: 50,000 hours
- UL/cUL standards for wet locations
- 5-Year limited warranty



Round High Bay

MODEL	UPC #	WATTS	LUMENS	LPW	CRI	COLOR TEMP.	VOLTS	WEIGHT
18,000 Lumen Package					Dimensions: 13.07"W x 8.0"H			
ORRH18L4K	765364023859	131	18,393	140	80	4000K	120-277	10.52 lbs.
ORRH18L5K	765364028410	131	18,458	141	80	5000K	120-277	10.52 lbs.
24,000 Lumen Package					Dimensions: 13.07"W x 8.19"H			
ORRH24L4K	765364023866	179	23,337	130	80	4000K	120-277	11.96 lbs.
ORRH24L5K	765364028427	179	22,383	125	80	5000K	120-277	11.96 lbs.
30,000 Lumen Package					Dimensions: 13.07"W x 8.19"H			
ORRH30L4K	765364023873	208	30,385	146	80	4000K	120-277	11.96 lbs.
ORRH30L5K	765364028434	208	30,295	146	80	5000K	120-277	11.96 lbs.

6 – 150 watts • 7,200 – 18,000 lumens

Features

- Lifespan: 50,000 hours
- ETL/cETL listed for wet locations
- 5-Year limited warranty



Temp Lights

MODEL	UPC #	WATTS	LUMENS	LPW	CRI	COLOR TEMP.	DIMMING	VOLTS
Small Temp Light					Dimensions: 6.22"W x 10.67"H			
ORTEMPS7L5K	765364029370	60	7,200	120	80	5000K	0-10V	120-277
Medium Temp Light					Dimensions: 6.22"W x 12.05"H			
ORTEMPM12L5K	765364029387	100	12,000	120	80	5000K	0-10V	120-277
Large Temp Light					Dimensions: 6.22"W x 13.43"H			
ORTEMP18L5K	765364029394	150	18,000	120	80	5000K	0-10V	120-277



Coming Soon

Coming Soon

Slim Wall Pack



Selectable 9x9 Canopy



Dusk to Dawn Button PC



Dusk to Dawn with Arm



Wrap




Selectable Wrap



Selectable Lensed Strip



Round High Bay
w/ Center Motion Receptacle

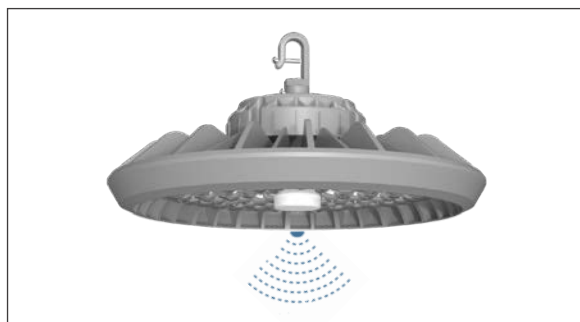

Phone: _____

[illegible]

TOTAL:

:



PO Box 2348 • Burlington, NC 27216
www.originledlighting.com • 800-849-8485
452-281B 07122021