



## REFERENCE GUIDE

MARCH 2025

# TABLE OF CONTENTS

## Classic Wall Lights

WL	4
WLSG	4
WLMS <b>SELECTABLE</b>	5
WLM	5
WLDS <b>SELECTABLE</b>	5
WLD	5

## Independence Wall Lights

WS <b>SELECTABLE</b>	6
W	6
WSGS <b>SELECTABLE</b>	6
WSG	6
WMS <b>SELECTABLE</b>	7
WM	7
WD	7

## Origin Series Wall Lights

ORTP	8
ORMWSEL <b>SELECTABLE</b>	8
ORWPSEL <b>SELECTABLE</b>	8
ORWP	9
ORVP	9

## SlimPak Pro

WSPSS <b>SELECTABLE</b>	10
WSPS	10
WSPLS <b>SELECTABLE</b>	10
WSPL	10
ORSWPSEL <b>SELECTABLE</b>	11

## Wall Pak Pro

WPS	11
WPM	11
WPL	11

## Dusk to Dawn

DDS <b>SELECTABLE</b>	12
-----------------------	----

## Vandal

VN8S <b>SELECTABLE</b>	12
VN12S <b>SELECTABLE</b>	12

## Canopy/Parking Garage Lights

PGM	12
CPM	13
CPMS <b>SELECTABLE</b>	13

## Independence Canopy Lights

LPC	13
-----	----

## Origin Series Canopy Lights

ORC	13
-----	----

## Extra Wide Flood Lights

PFSXW	14
PFMXW	14
HXW - Hawk <b>SELECTABLE</b>	15
PFL2GXW	16
PFXL2GXW <b>SELECTABLE</b>	16

## Optic Flood Lights

PFS	14
PFM	14
HXP - Hawk <b>SELECTABLE</b>	15
Brackets	26

## Extreme Flood Lights

PFL2GH	16
PFXL2GH <b>SELECTABLE</b>	16

## Independence Flood Lights

FS	17
FM	17

## Origin Series Flood Lights

SSF/SMF/SLF <b>SELECTABLE</b>	18
ORMSSEL <b>SELECTABLE</b>	18
ORMS	19
ORBSEL <b>SELECTABLE</b>	19

## Patriot Sports Lights

SPTS <b>SELECTABLE</b>	20
------------------------	----

## Area Lights

Roadway Light	21
Bollard <b>SELECTABLE</b>	21
ORALSEL <b>SELECTABLE</b>	24
ORASEL <b>SELECTABLE</b>	24
Small Eagle Series - Selectable <b>SELECTABLE</b>	25
Small Eagle Series	25
Medium Eagle Series - Selectable <b>SELECTABLE</b>	26
Medium Eagle Series	27
Universal Bracket System	29
Dual Deal Luminaire/Pole Combo	30
Poles	31-33

## Independence High Bay

IHBS <b>SELECTABLE</b>	34
IHB	34-35

## Linear High Bay

ILH	36-37
-----	-------

## Origin Series Die Cast High Bay

ORHBS <b>SELECTABLE</b>	39
-------------------------	----

## Round High Bay

ORRHS <b>SELECTABLE</b>	39
IRHS <b>SELECTABLE</b>	39

## Linear Wet Location

ILWS Narrow <b>SELECTABLE</b>	40
ILW Narrow	40
ILWS Wide <b>SELECTABLE</b>	41
ILW Wide	41
ILWRK - Potomac-AT	42

## Independence Vaportite

IVT	42
-----	----

## Origin Series Vapor Tight

ORVT	42
------	----

## Field Adjustable Edge Lit Panels

FAELP <b>SELECTABLE</b>	43
-------------------------	----

## Origin Series Back Lit Panels

ORBLP <b>SELECTABLE</b>	43
-------------------------	----

## Origin Series Linear Wrap

ORWS <b>SELECTABLE</b>	44
------------------------	----

## Linear Strips

ORST	44
ORSTS <b>SELECTABLE</b>	44
ILSS <b>SELECTABLE</b>	45

## Stairwell Lights

SWL	45
-----	----

## Origin Series Low Profile Troffers

TLP <b>SELECTABLE</b>	46
-----------------------	----

## Origin Series Commercial Downlights

CDL <b>SELECTABLE</b>	46
-----------------------	----

## Exit & Emergency

EXP	48
EEC	48
EMO	49
ERD <b>SELECTABLE</b>	49
ERHR	49

## Technical Information

50-55





## WHO WE ARE:

Atlas Lighting Products manufactures high quality commercial and industrial lighting fixtures that meet the needs of both distributors and contractors. For more than 30 years Atlas has built a reputation for speed, reliability and performance and continues to be a trusted name in the lighting industry.



## WHAT WE DO:

Atlas Lighting Products specializes in the design and manufacturing of interior and exterior lighting solutions. Designed in Burlington NC, our offerings include products engineered to meet demanding specifications in many different applications (Classic & Independence Series) as well as highly flexible, cost-effective field selectable products (Origin Series) that help distributors reduce inventory and increase turns.



## HOW WE DO IT:

Atlas' aim is to make it easy for customers. Starting with a complete line of products that are shipped quickly and reliably – over 100 products are available for same day shipping. The US based customer support is available for assistance with product selection, layouts, inquiries, technical issues, order tracking and much more via phone, email or chat. The assistance does not stop after products have been sold. Atlas also provides a live installation and technical service hotline.

## Classic Series Tall LED Wall Light



- Reduced Glare & Offensive Light
- Less Wasted Light
- More Footcandles on the Ground



HOUSING	UNIT	CRI	3000K CCT		4000K CCT		4500K CCT		5000K CCT		WATTAGE	REPLACES UP TO
			DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)		
WL	20LED	83	1,696	87	1,696	87	1,788	92	1,788	92	19	100W MH

Scan QR code above for ordering format and more detailed information

## Classic Series Small LED Wall Light



- Easy to install, easy to maintain
- Optical Grade Individual Lenses
- Delivers Increased Footcandles



HOUSING	UNIT	CRI	3000K CCT		4000K CCT		4500K CCT		5000K CCT		WATTAGE	REPLACES UP TO
			DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)		
WLSG	27LED	83	2,749	105	2,749	105	3,017	113	3,017	113	27	100W MH

Scan QR code above for ordering format and more detailed information

### CLASSIC SERIES - EASY INSTALL



- Bubble level
- Opens to side
- Same size as existing



PRODUCT VIDEO  
Scan to view

# Classic Series Medium LED Wall Light

**FULLY SELECTABLE**  
-☀+ LUMEN • CCT



- Reduced Glare & Offensive Light
- Less Wasted Light
- More Footcandles on the Ground



HOUSING	UNIT	CRI	SELECTABLE 4000K CCT		SELECTABLE 4500K CCT		SELECTABLE 5000K CCT		WATTAGE	REPLACES UP TO		
			DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)				
SELECTABLE												
WLMS	3-9L	80	2,601	120	2,704	125	2,602	121	22	100W MH		
			5,513	126	5,732	131	5,516	126	44	175W MH		
			7,892	123	8,205	127	7,896	123	64	400W MH		
			9,128	120	9,490	130	9,133	120	76	400W MH		
HOUSING	UNIT	CRI	3000K CCT		4000K CCT		4500K CCT		5000K CCT		WATTAGE	REPLACES UP TO
			DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)		
FIXED												
WLM	43LED	80	3,908	96	5,276	122	5,726	122	5,308	122	44	175W MH
	64LED	80	5,699	92	5,699	92	6,793	113	6,793	113	62	400W MH

Scan QR code above for ordering format and more detailed information

# Classic Series Large LED Wall Light

**FULLY SELECTABLE**  
-☀+ LUMEN • CCT



- Reduced Glare & Offensive Light
- Less Wasted Light
- More Footcandles on the Ground



HOUSING	UNIT	CRI	SELECTABLE 4000K CCT		SELECTABLE 4500K CCT		SELECTABLE 5000K CCT		WATTAGE	REPLACES UP TO		
			DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)				
SELECTABLE												
WLDS	4-13L	70	3,897	134	4,073	139	3,889	133	29	175W MH		
			7,688	135	8,034	141	7,672	134	57	400W MH		
			11,136	130	11,638	136	11,113	130	86	400W MH		
			12,891	126	13,472	138	12,864	126	102	400W MH		
	10-20L	80	9,883	135	10,151	138	9,566	131	73	400W MH		
			14,744	132	15,144	135	14,271	127	112	400W MH		
19,447			124	19,975	133	18,823	121	156	400W MH			
HOUSING	UNIT	CRI	3000K CCT		4000K CCT		4500K CCT		5000K CCT		WATTAGE	REPLACES UP TO
			DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)		
FIXED												
WLD	64LED	80	7,168	117	7,168	117	7,168	117	7,662	126	62	400W MH
	86LED	80	9,120	109	9,120	109	9,120	109	9,120	109	84	400W MH

Scan QR code above for ordering format and more detailed information

## THE INFORMATION YOU NEED - ALL IN ONE PLACE

Visit [www.atlasled.com](http://www.atlasled.com) or scan QR code more information, including cut sheets, case studies, installation videos, instruction sheets, savings information, IES files, lighting calculation tools and more.



\*The majority of Atlas Lighting Products are assembled in USA facilities by an American Workforce utilizing both Domestic and Foreign components. | \*Qualifies for Buy American under ARRA

# Independence Series Tall LED Wall Light

## CCT SELECTABLE



- Reduced Glare & Offensive Light
- Less Wasted Light
- More Footcandles on the Ground



HOUSING	UNIT	CRI	SELECTABLE 4000K CCT		SELECTABLE 4500K CCT		SELECTABLE 5000K CCT		WATTAGE	REPLACES UP TO
			DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)		
SELECTABLE										
WS	2L	80	2,254	124	2,305	130	2,316	127	18	100W MH
HOUSING	UNIT	CRI	4000K CCT		4500K CCT		5000K CCT		WATTAGE	REPLACES UP TO
			DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)		
FIXED										
W	2L	80	2,283	112	2,133	110	2,285	112	21	100W MH

Scan QR code above for ordering format and more detailed information

# Independence Series Small LED Wall Light

## FULLY SELECTABLE - LUMEN • CCT



- Easy to install, easy to maintain
- Optical Grade Individual Lenses
- Delivers Increased Footcandles



HOUSING	UNIT	CRI	SELECTABLE 4000K CCT		SELECTABLE 4500K CCT		SELECTABLE 5000K CCT		WATTAGE	REPLACES UP TO		
			DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)				
SELECTABLE												
WSGS	1-4L	80	1,006	148	1,047	154	1,000	147	7	100W MH		
			2,381	146	2,479	152	2,367	145	16			
			3,534	140	3,680	146	3,513	139	25			
			4,329	134	4,507	145	4,303	134	32			
HOUSING	UNIT	CRI	3000K CCT		4000K CCT		4500K CCT		5000K CCT		WATTAGE	REPLACES UP TO
			DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)		
FIXED												
WSG	4L	80	3,913	125	3,913	125	3,913	125	4,044	123	31	100W MH

Scan QR code above for ordering format and more detailed information

## INDEPENDENCE SERIES - EASY INSTALL



- Bubble level
- Opens to side
- Same size as existing



PRODUCT VIDEO  
Scan to view

## Independence Series Medium LED Wall Light

**FULLY SELECTABLE**

— ☀ — LUMEN • CCT



- Reduced Glare & Offensive Light
- Less Wasted Light
- More Footcandles on the Ground



HOUSING	UNIT	CRI	SELECTABLE 4000K CCT		SELECTABLE 4500K CCT		SELECTABLE 5000K CCT		WATTAGE	REPLACES UP TO
			DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)		
SELECTABLE										
WMS	3-10L	80	2,951	137	3,072	142	2,956	137	22	100W MH
			6,225	142	6,481	148	6,236	142	44	175W MH
			8,939	139	9,307	145	8,955	140	64	400W MH
			10,335	136	10,760	147	10,354	136	76	400W MH

HOUSING	UNIT	CRI	3000K CCT		4000K CCT		4500K CCT		5000K CCT		WATTAGE	REPLACES UP TO
			DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)		
FIXED												
WM	5L	80	4,900	128	5,036	132	4,900	128	5,071	132	38	175W MH
	7L	80	7,051	117	7,229	121	7,229	121	7,349	122	60	400W MH
	10L	80	-	-	10,500	135	10,500	135	10,520	135	78	400W MH

Scan QR code above for ordering format and more detailed information

## Independence Series Large LED Wall Light



- Reduced Glare & Offensive Light
- Less Wasted Light
- More Footcandles on the Ground



HOUSING	UNIT	CRI	3000K CCT		4000K CCT		4500K CCT		5000K CCT		WATTAGE	REPLACES UP TO
			DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)		
WD	7L	80	6,046	114	6,933	124	6,933	124	6,933	124	56	400W MH
	10L	80	9,958	122	9,958	122	9,958	122	9,958	122	82	400W MH

Scan QR code above for ordering format and more detailed information

### THE INFORMATION YOU NEED - ALL IN ONE PLACE

Visit [www.atlasled.com](http://www.atlasled.com) or scan QR code more information, including cut sheets, case studies, installation videos, instruction sheets, savings information, IES files, lighting calculation tools and more.



\*The majority of Atlas Lighting Products are assembled in USA facilities by an American Workforce utilizing both Domestic and Foreign components. | \*Qualifies for Buy American under ARRA

## Origin Series Tall LED Wall Light



- Energy-efficient design
- Same footprint as the fixtures they replace, reducing labor costs
- Origin products are backed by the same US-based customer service



HOUSING	UNIT	CRI	4000K CCT		WATTAGE	REPLACES UP TO
			DELIVERED LUMENS	EFFICACY (LPW)		
ORTP	2L	80	1,786	127	15	100W MH

Scan QR code above for more detailed information

## Origin Series Mini LED Wall Light

**FULLY SELECTABLE**  
- ☀ + LUMEN • CCT



- Energy-efficient design
- Same footprint as the fixtures they replace, reducing labor costs
- Origin products are backed by the same US-based customer service



HOUSING	UNIT	CRI	SELECTABLE 3000K CCT		SELECTABLE 4000K CCT		SELECTABLE 5000K CCT		WATTAGE	REPLACES UP TO
			DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)		
SELECTABLE										
ORMWSEL	2-4L	>80	2,287	142	2,418	154	2,476	154	15	175W MH
			2,934	134	3,154	150	3,203	149	20	
			3,815	129	4,202	147	4,238	142	30	

### ORWPSEL SWITCH



### ORVP ADJUSTABLE HEAD





# Origin Series Medium LED Wall Light

**FULLY SELECTABLE**  
- ☀️ + LUMEN • CCT 🌙



- Energy-efficient design
- Same footprint as the fixtures they replace, reducing labor costs
- Origin products are backed by the same US-based customer service



HOUSING	UNIT	CRI	SELECTABLE 3000K CCT		SELECTABLE 4000K CCT		SELECTABLE 5000K CCT		WATTAGE	REPLACES UP TO
			DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)		
SELECTABLE										
ORWPSEL	2-6L	80	2,173	135	2,276	143	2,232	137	16	175-400W MH
			4,034	134	4,224	142	4,144	136	30	
			5,998	131	6,280	139	6,161	133	46	
	5-14L	80	5,468	152	5,826	166	5,689	158	36	400W MH
			10,509	135	11,199	149	10,935	141	78	
			13,461	135	14,344	148	14,007	141	100	

HOUSING	UNIT	CRI	4000K CCT		WATTAGE	REPLACES UP TO
			DELIVERED LUMENS	EFFICACY (LPW)		
FIXED						
ORWP	5L	80	6,178	137	45	175W MH
	10L	80	13,571	137	99	400W MH

Scan QR code above for ordering format and more detailed information

# Origin Series Tall LED Vapor Proof



- Durable metal die-cast housing
- LED head is adjustable from 90° to 180°
- Origin products are backed by the same US-based customer service



HOUSING	UNIT	CRI	3000K CCT		4000K CCT		WATTAGE	REPLACES UP TO
			DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)		
ORVP	2L	80	2,000	100	2,000	100	20	100W MH

Scan QR code above for more detailed information

## THE INFORMATION YOU NEED - ALL IN ONE PLACE

Visit [www.atlasled.com](http://www.atlasled.com) or scan QR code more information, including cut sheets, case studies, installation videos, instruction sheets, savings information, IES files, lighting calculation tools and more.



\*The majority of Atlas Lighting Products are assembled in USA facilities by an American Workforce utilizing both Domestic and Foreign components. | \*Qualifies for Buy American under ARRA

# SlimPak Pro Series Small LED Wall Light

**FULLY SELECTABLE**  
- ☀️ + LUMEN • CCT



- Quick and easy installation saves time and money
- Hinged at the bottom to prevent water ingress
- External airflow fins help to dissipate heat



HOUSING	UNIT	CRI	SELECTABLE 4000K CCT		SELECTABLE 4500K CCT		SELECTABLE 5000K CCT		WATTAGE	REPLACES UP TO
			DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)		
SELECTABLE										
WSPSS	1-4L	80	911	105	966	111	921	106	9	100W MH
			2,312	118	2,451	125	2,337	119	20	
			3,473	115	3,683	122	3,510	117	30	
			4,047	112	4,291	124	4,090	113	36	

HOUSING	UNIT	CRI	3000K CCT		WATTAGE	REPLACES UP TO
			DELIVERED LUMENS	EFFICACY (LPW)		
FIXED - DARK SKY COMPLIANT						
WSPS	12LED	83	1,206	98	12	70W MH
	20LED	83	2,125	107	20	100W MH
	40LED	83	3,712	100	38	175W MH

Scan QR code above for ordering format and more detailed information

# SlimPak Pro Series Large LED Wall Light

**FULLY SELECTABLE**  
- ☀️ + LUMEN • CCT



- Quick and easy installation saves time and money
- Hinged at the bottom to prevent water ingress
- External airflow fins help to dissipate heat



HOUSING	UNIT	CRI	SELECTABLE 4000K CCT		SELECTABLE 4500K CCT		SELECTABLE 5000K CCT		WATTAGE	REPLACES UP TO
			DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)		
SELECTABLE										
WSPLS	2-8L	80	2,238	112	2,350	123	2,134	107	20	100W MH
			4,640	116	4,872	127	4,424	111	40	
			6,655	112	6,987	123	6,346	106	60	
			7,915	110	8,387	121	7,617	106	72	

HOUSING	UNIT	CRI	3000K CCT		WATTAGE	REPLACES UP TO
			DELIVERED LUMENS	EFFICACY (LPW)		
FIXED - DARK SKY COMPLIANT						
WSPL	60LED	83	6,513	112	58	250W MH
	80LED	83	8,060	106	76	400W MH

Scan QR code above for ordering format and more detailed information

## SLIMPAK PRO/WALL PACK PRO SERIES - EASY INSTALL



**INSTALLATION VIDEO**  
Scan to view



**INSTALLATION VIDEO**  
Scan to view



# Origin Series Slim LED Wall Light

**FULLY SELECTABLE**  
- ☀️ + LUMEN • CCT 🌈



- Quick and easy installation saves time and money
- Adjustable 0° - 90°
- Origin products are backed by the same US-based customer service



HOUSING	UNIT	CRI	SELECTABLE 3000K CCT		SELECTABLE 4000K CCT		SELECTABLE 5000K CCT		WATTAGE	REPLACES UP TO
			DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)		
SELECTABLE										
ORSWPSEL	2-4L	>80	1,875	125	2,100	140	2,025	135	15	175W MH
			2,500	125	2,800	140	2,700	135	20	
			3,750	125	4,200	140	4,050	135	30	

## Wall Pack Pro Series Small LED Wall Light



- Quick and easy installation saves time and money
- Smooth and even light distribution eliminates glare
- External airflow fins help to dissipate heat



HOUSING	UNIT	CRI	3000K CCT		4000K CCT		4500K CCT		5000K CCT		WATTAGE	REPLACES UP TO
			DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)		
WPS	13LED	80	1,629	121	1,629	121	1,629	121	1,682	124	14	70W MH
	27LED	80	3,132	114	3,132	114	3,132	114	3,261	118	28	100W MH

Scan QR code above for ordering format and more detailed information

## Wall Pack Pro Series Medium LED Wall Light



- Quick and easy installation saves time and money
- Smooth and even light distribution eliminates glare
- External airflow fins help to dissipate heat



HOUSING	UNIT	CRI	3000K CCT		4000K CCT		4500K CCT		5000K CCT		WATTAGE	REPLACES UP TO
			DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)		
WPM	43LED	80	5,025	116	5,025	116	5,025	116	5,229	121	43	175W MH
	64LED	80	6,983	114	6,983	114	6,983	114	7,237	118	61	400W MH

Scan QR code above for ordering format and more detailed information

### THE INFORMATION YOU NEED - ALL IN ONE PLACE

Visit [www.atlasled.com](http://www.atlasled.com) or scan QR code more information, including cut sheets, case studies, installation videos, instruction sheets, savings information, IES files, lighting calculation tools and more.



\*The majority of Atlas Lighting Products are assembled in USA facilities by an American Workforce utilizing both Domestic and Foreign components. | \*Qualifies for Buy American under ARRA

## Security Dusk to Dawn

**FULLY SELECTABLE**  
- ☀️ + LUMEN • CCT



- Replace 9 standard fixtures with just 1
- Polycarbonate lens creates a smooth, glare-free light
- Features a replaceable button photocontrol



HOUSING	UNIT	CRI	SELECTABLE 3000K CCT		SELECTABLE 4000K CCT		SELECTABLE 5000K CCT		WATTAGE	REPLACES UP TO
			DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)		
DDS	3-8L	70	2412	134	2772	154	2502	139	18	175W MV
			4690	134	5390	154	4865	139	35	
			7451	134	8236	154	7726	139	56	

## Classic Vandal Light

**FULLY SELECTABLE**  
- ☀️ + LUMEN • CCT



- Replace 9 vandal resistant lights with just 1
- Die-cast aluminum housing
- Traditional fixture designs provide a familiar look.



HOUSING	UNIT	CRI	SELECTABLE 4000K CCT		SELECTABLE 4500K CCT		SELECTABLE 5000K CCT		WATTAGE	REPLACES UP TO
			DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)		
SELECTABLE										
VN8S	2-4L	80	2,247	122	2,382	129	2,322	126	18	175W MH
			3,307	122	3,505	129	3,418	126	27	
			4,309	117	4,567	129	4,453	121	36	
VN12S	5-11L	80	5,507	137	5,746	143	5,526	137	40	400W MH
			8,123	135	8,475	141	8,150	136	60	
			10,650	130	11,112	141	10,686	131	82	

## Low Profile Parking Garage Light



- Slim, low-profile fixture is less than 5" tall
- Hinged design allows for easy installation
- Optics designed for parking garage applications




HOUSING	UNIT	CRI	3000K CCT		4000K CCT		4500K CCT		5000K CCT		WATTAGE	REPLACES UP TO
			DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)		
PGM	25LED	83	3,387	138	3,387	138	3,387	138	3,524	144	25	100W MH
	40LED	83	5,528	134	5,528	134	5,528	134	5,717	138	42	175W MH
	60LED	83	7,693	130	7,693	130	7,693	130	7,898	131	60	250W MH
	80LED	83	9,830	124	9,830	124	9,830	124	10,030	124	81	400W MH

Scan QR code above for ordering format and more detailed information

### LOW PROFILE CANOPY - EASY INSTALL



**INSTALLATION VIDEO**  
Scan to view



**INSTALLATION VIDEO**  
Scan to view



## Low Profile Canopy Light

**FULLY SELECTABLE**  
- ✨+ LUMEN • CCT



- Slim, low-profile fixture is less than 5" tall
- Hinged design allows for easy installation
- Lens produces a smooth, uniform and even light



HOUSING	UNIT	CRI	SELECTABLE 4000K CCT		SELECTABLE 4500K CCT		SELECTABLE 5000K CCT		WATTAGE	REPLACES UP TO
			DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)		
SELECTABLE										
CPMS	3-12L	80	3,217	141	3,323	145	3,213	140	23	100W - 400W MH
			6,797	147	7,020	152	6,788	147	46	
			9,867	145	10,190	149	9,854	145	68	
			11,621	142	12,002	153	11,606	142	82	
HOUSING	UNIT	CRI	3000K CCT		WATTAGE	REPLACES UP TO				
			DELIVERED LUMENS	EFFICACY (LPW)						
FIXED - DARK SKY COMPLIANT										
CPM	25LED		83	3,363	137	25	100W MH			
	40LED		83	5,452	135	42	175W MH			
	60LED		83	7,680	127	60	250W MH			
	80LED		83	9,691	122	81	400W MH			



## Independence Series Low Profile Canopy Light



- Slim, low-profile fixture is less than 4" tall
- Heavy duty die-cast aluminum housing
- Smooth light distribution pattern with low glare



HOUSING	UNIT	CRI	4000K CCT		4500K CCT		5000K CCT		WATTAGE	REPLACES UP TO
			DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)		
LPC	5L	80	5,100	143	5,100	143	5,101	143	36	175W MH
	7L	80	7,030	134	7,001	134	7,001	134	52	250W MH



## Origin Series LED Canopy Light



- Slim, low-profile fixture is less than 4" tall
- Durable, die-cast aluminum housing
- Origin products are backed by the same US-based customer service



HOUSING	UNIT	CRI	4000K CCT		WATTAGE	REPLACES UP TO
			DELIVERED LUMENS	EFFICACY (LPW)		
ORC	5L	70	4,630	127	36	175W MH

Scan QR code above for more detailed information

### THE INFORMATION YOU NEED - ALL IN ONE PLACE

Visit [www.atlasled.com](http://www.atlasled.com) or scan QR code more information, including cut sheets, case studies, installation videos, instruction sheets, savings information, IES files, lighting calculation tools and more.



\*The majority of Atlas Lighting Products are assembled in USA facilities by an American Workforce utilizing both Domestic and Foreign components. | \*Qualifies for Buy American under ARRA

## Classic Series Small LED Flood Light

OPTIC | EXTRA-WIDE



- Smooth, even and uniform light pattern
- More Footcandles Delivered to the Target
- Less Glare and Wasted Light



HOUSING	UNIT	CRI	3000K CCT		4000K CCT		4500K CCT		5000K CCT		WATTAGE	REPLACES UP TO
			DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)		
PFS	22LED	70	1,978	93	1,978	93	1,978	93	2,194	103	21	100W MH
PFSXW	27LED	80	3,132	114	3,132	114	3,132	114	3,261	118	28	100W MH

Scan QR code above for ordering format and more detailed information

## Classic Series Medium LED Flood Light

OPTIC | EXTRA-WIDE



- Smooth, even and uniform light pattern
- More Footcandles Delivered to the Target
- Less Glare and Wasted Light



HOUSING	UNIT	CRI	3000K CCT		4000K CCT		4500K CCT		5000K CCT		WATTAGE	REPLACES UP TO
			DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)		
PFM	43LED	70	4,010	97	4,010	97	4,010	97	4,343	105	41	175W MH
PFMXW	43LED	80	5,025	116	5,025	116	5,025	116	5,229	121	43	175W MH
PFMXW	64LED	80	6,983	114	6,983	114	6,983	114	7,237	118	64	250W MH

Scan QR code above for ordering format and more detailed information

### HAWK SERIES - SELECTABLE



**CHANGE AT THE  
FLIP OF A SWITCH**

**Easy Access**  
Individual dip switches allow users to select color temperature and light output.



**PRODUCT VIDEO**  
Scan to view

# Hawk Series Medium LED Flood Light

OPTIC | EXTRA-WIDE

**FULLY SELECTABLE**

– ☀ + LUMEN • CCT



- Heavy Duty Knuckle, Trunnion and Slipfitter/Trunnion Predator Mount Available
- Compact: 40% Smaller
- Selectable Flood: Reduce from 9 fixtures to 1



HOUSING	UNIT	CRI	SELECTABLE 3000K CCT		SELECTABLE 4000K CCT		SELECTABLE 5000K CCT		WATTAGE	REPLACES UP TO
			DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)		
SELECTABLE										
HSXP (NEMA 6x6 optic)	8-16L	70	8,445	137	9,178	149	8,749	142	62	400W MH
			12,144	130	13,198	141	12,581	135	93	
			15,170	120	16,487	138	15,716	124	127	
HSXW (extra wide)	8-16L	70	9,052	146	9,945	161	9,322	151	62	400W MH
			13,166	141	14,465	155	13,559	145	94	
			16,551	131	18,184	152	17,045	135	126	

HOUSING	UNIT	CRI	3000K CCT		4000K CCT		4500K CCT		5000K CCT		WATTAGE	REPLACES UP TO
			DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)		
FIXED												
HXP6 (NEMA 6x6 optic)	8L	70	8,654	140	9,047	146	8,871	143	8,871	143	62	400W MH
	12L	70	12,224	130	12,779	136	12,530	133	12,530	133	94	
	16L	70	15,010	119	15,691	127	15,386	127	15,386	127	126	
HXW (extra wide)	8L	70	9,267	150	9,711	157	9,267	150	9,366	152	62	400W MH
	12L	70	12,991	139	13,613	145	12,991	139	13,129	140	94	
	16L	70	16,456	130	17,244	137	16,456	130	16,631	132	126	

Scan QR code above for ordering format and more detailed information

## THE INFORMATION YOU NEED - ALL IN ONE PLACE

Visit [www.atlasled.com](http://www.atlasled.com) or scan QR code more information, including cut sheets, case studies, installation videos, instruction sheets, savings information, IES files, lighting calculation tools and more.



\*The majority of Atlas Lighting Products are assembled in USA facilities by an American Workforce utilizing both Domestic and Foreign components. | \*Qualifies for Buy American under ARRA

## Classic Series Large LED Flood Light OPTIC | EXTRA-WIDE



- Less Glare and Wasted Light
- Attractive architectural styling
- Smooth, even and uniform light pattern



HOUSING	UNIT	CRI	3000K CCT		4000K CCT		4500K CCT		5000K CCT		WATTAGE	REPLACES UP TO
			DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)		
PFL2GH (optic)	20L	70	20,200	142	21,338	150	21,338	150	21,534	152	142	400W MH
	25L	70	24,840	138	26,240	147	26,240	147	26,480	148	180	1000W MH
PFL2GXW (extra wide)	20L	70	20,540	144	20,540	144	20,540	144	11,140	153	142	400W MH
	25L	70	25,040	139	25,040	139	25,040	139	25,040	139	180	1000W MH

Scan QR code above for ordering format and more detailed information

## Classic Series Extra Large LED Flood Light OPTIC | EXTRA-WIDE

**LUMEN SELECTABLE**



- Less Glare and Wasted Light
- Attractive architectural styling
- Smooth, even and uniform light pattern



HOUSING	UNIT	CRI	3000K CCT		4000K CCT		4500K CCT		5000K CCT		WATTAGE	REPLACES UP TO
			DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)		
SELECTABLE												
PFXL2GH (optic) LUMEN SEL	26-50L	70	24,332	144	25,582	152	25,437	151	25,353	150	169	1000W MH
			36,518	141	38,394	148	38,176	148	38,051	147	259	
			47,818	133	50,275	139	49,989	138	49,825	138	361	
PFXL2GXW (extra wide) FULLY SEL	26-50L	70	—	—	28,506	160	29,756	167	27,941	157	178	1000W MH
			—	—	42,003	151	43,845	158	41,170	148	278	
			—	—	52,133	143	54,419	156	51,099	140	366	

HOUSING	UNIT	CRI	3000K CCT		4000K CCT		4500K CCT		5000K CCT		WATTAGE	REPLACES UP TO
			DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)		
FIXED												
PFXL2GH (optic)	33L	70	31190	151	32849	151	32849	151	33408	151	219	1000W MH
	40L	70	37020	139	38989	147	38989	147	39653	149	266	
	50L	70	47390	132	49910	141	49910	141	50760	142	355	
PFXL2GXW (extra wide)	33L	70	33210	151	33210	151	33210	151	33210	151	220	1000W MH
	40L	70	39430	148	39430	148	39430	148	39430	148	267	
	50L	70	50130	141	50130	141	50130	141	50130	141	357	

Scan QR code above for ordering format and more detailed information

### CLASSIC/INDEPENDENCE SERIES FLOOD LIGHTS



**PRODUCT VIDEO**  
Scan to view



**PRODUCT VIDEO**  
Scan to view







## Independence Series Small LED Flood Light



- Slim die-cast aluminum housing
- NEMA 6×6 light distribution pattern
- Mounting options include both Knuckle and Trunnion



HOUSING	UNIT	CRI	4000K CCT		4500K CCT		5000K CCT		WATTAGE	REPLACES UP TO
			DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)		
FS	3L	80	3,644	129	3,463	127	3,463	127	28	100W MH
	6L	80	5,992	123	5,765	121	5,765	121	49	175W MH

Scan QR code above for ordering format and more detailed information



## Independence Series Medium LED Flood Light



- Slim die-cast aluminum housing
- NEMA 6×6 light distribution pattern
- Mounting options include both Knuckle and Trunnion



HOUSING	UNIT	CRI	4000K CCT		4500K CCT		5000K CCT		WATTAGE	REPLACES UP TO
			DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)		
FM	8L	80	8,850	126	8,775	128	8,775	128	70	400W MH

Scan QR code above for ordering format and more detailed information

### THE INFORMATION YOU NEED - ALL IN ONE PLACE

Visit [www.atlasled.com](http://www.atlasled.com) or scan QR code more information, including cut sheets, case studies, installation videos, instruction sheets, savings information, IES files, lighting calculation tools and more.



\*The majority of Atlas Lighting Products are assembled in USA facilities by an American Workforce utilizing both Domestic and Foreign components. | \*Qualifies for Buy American under ARRA



# Origin Series Selectable Flood Light

SMALL | MEDIUM | LARGE

**FULLY SELECTABLE**  
- ☀ + LUMEN • CCT



- Selectable lumens and CCT
- Selectable photocontrol included
- Multi-Mount - Knuckle/Trunnion or Slipfitter/Trunnion in carton
- Origin products are backed by the same US-based customer service



HOUSING	UNIT	CRI	SELECTABLE 3000K CCT		SELECTABLE 4000K CCT		SELECTABLE 5000K CCT		WATTAGE	REPLACES UP TO
			DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)		
SSF	2-5L	80	2,237	144	2,351	158	2,359	156	15	100W MH
			3,497	136	3,814	153	3,788	146	26	100W MH
			4,785	126	5,425	143	5,168	137	38	175W MH
SMF	5-12L	80	5,567	151	5,883	165	5,966	163	37	175W MH
			8,714	141	9,327	158	9,276	152	62	175W MH
			10,833	128	12,007	148	11,325	139	84	250W MH
SLF	10-20L	80	10,495	143	11,082	159	11,100	154	83	250W/400W MH
			14,075	137	15,154	155	14,985	148	102	400W MH
			18,484	129	20,015	147	18,706	134	140	400W MH

Scan QR code above for more detailed information

## 4X4 SELECTABLE FLOODS MULTI-MOUNT



## Origin Series Motion Security Light

**FULLY SELECTABLE**  
-☀+ LUMEN • CCT



- Two adjustable LED heads provide high light output
- Detects motion in a wide 240° pattern
- Origin products are backed by the same US-based customer service



HOUSING	UNIT	CRI	SELECTABLE 3000K CCT		SELECTABLE 4000K CCT		SELECTABLE 5000K CCT		WATTAGE
			DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	
ORMSSEL	1-3L	>80	2,200	122	2,350	131	2,300	127	18
			3,025	121	3,250	130	3,150	126	25

Scan QR code above for more detailed information

## Origin Series Selectable Bullet Flood Light

SMALL | LARGE

**FULLY SELECTABLE**  
-☀+ LUMEN • CCT



- Energy-efficient design saves money on energy costs
- Die-cast aluminum housing dissipates heat
- Origin products are backed by the same US-based customer service



HOUSING	UNIT	CRI	SELECTABLE 3000K CCT		SELECTABLE 4000K CCT		SELECTABLE 5000K CCT		WATTAGE	REPLACES UP TO
			DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)		
SELECTABLE										
ORBSEL	1-3L	80+	1,268	134	1,379	148	1,316	137	9	100W MH
			2,195	133	2,386	148	2,277	137	16	
			3,061	131	3,327	145	3,176	135	24	

Scan QR code above for more detailed information

### THE INFORMATION YOU NEED - ALL IN ONE PLACE

Visit [www.atlasled.com](http://www.atlasled.com) or scan QR code more information, including cut sheets, case studies, installation videos, instruction sheets, savings information, IES files, lighting calculation tools and more.



\*The majority of Atlas Lighting Products are assembled in USA facilities by an American Workforce utilizing both Domestic and Foreign components. | \*Qualifies for Buy American under ARRA

# Patriot Series LED Sports Light

LUMEN SELECTABLE

- ☀ +



- Rugged die cast aluminum housing
- Separate driver compartment to extend life
- Precision optics achieve higher light output



HOUSING	UNIT	WEIGHT	EPA	DISTRIBUTION	CRI	5000K CCT		WATTS	REPLACES UP TO
						DELIVERED LUMENS	EFFICACY (LPW)		
SPTS	75-110L	40.8 lbs.	2.8	3x3	70	68,526	149	469	1000W MH
				4x4	70	77,401	146		
				5x5	70	74,180	153		
				6x6	70	72,855	146		
		40.8 lbs.	2.8	3x3	70	81,100	152	584	1500W MH
				4x4	70	92,329	140		
				5x5	70	88,487	148		
				6x6	70	86,906	139		
		40.8 lbs.	2.8	3x3	70	103,622	147	783	-
				4x4	70	115,561	148		
				5x5	70	110,752	136		
				6x6	70	108,774	137		

Scan QR code above for ordering format and more detailed information

## Accessories

		PART NUMBER	DESCRIPTION	FINISH	STD. PKG.
		831028	Laser Sight	Black	1
		831029	Glare Shield Visor	Black	1
		831030	Tenon Top Adapter / Slip Fitter	Black	1
		831031	35' Cord for Remote Driver	Black	1
		831032	60' Cord for Remote Driver	Black	1

### PATRIOT SERIES



EASY ADJUSTMENTS  
Scan to view



# Constitution Series LED Roadway Light



- Less Glare and Wasted Light
- Attractive architectural styling
- Smooth, even and uniform light pattern



HOUSING	UNIT	DISTRIBUTION	CRI	3000K CCT		4000K CCT		4500K CCT		5000K CCT		WATTAGE	REPLACES UP TO
				DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)		
RW2G	8L	Type II	70	8,236	147	8,799	157	8,789	157	8,673	155	56	175W MH
		Type III	70	8,007	143	8,554	153	8,545	153	8,432	151		
		FT	70	8,099	145	8,652	155	8,643	154	8,529	152		
		Type V	70	8,251	147	8,815	157	8,806	157	8,689	155		
RW2G	14L	Type II	70	13,861	130	14,807	136	14,791	136	14,596	135	107	250W MH
		Type III	70	13,475	126	14,395	133	14,380	133	14,190	132		
		FT	70	13,630	128	14,561	134	14,545	134	14,353	133		
		Type V	70	13,886	130	14,834	137	14,819	137	14,623	136		
RW2G	18L	Type II	70	17,902	120	17,902	124	18,340	124	18,111	122	148	175W MH
		Type III	70	17,687	118	17,687	122	18,120	122	17,893	121		
		FT	70	17,694	118	17,694	122	18,127	122	17,900	121		
		Type V	70	17,914	120	17,914	124	18,352	124	18,123	122		

Scan QR code above for ordering format and more detailed information

## Bollard

**FULLY SELECTABLE**  
- LUMEN • CCT



- Full proof aluminum construction provides both corrosion and vandal resistance
- Solid foundation and components withstand the elements and poor conditions



HOUSING	UNIT	CRI	3000K CCT		4000K CCT		5000K CCT		WATTAGE
			DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	
FULLY SELECTABLE									
BLS	1-3L	80	1,296	123	1,341	130	1,304	125	10
			2,543	125	2,631	131	2,559	127	20
			3,480	119	3,601	125	3,502	121	30
LUMEN SELECTABLE - DARK SKY COMPLIANT									
BLS	1-3L3K	80	1,296	123	n/a	n/a	n/a	n/a	10
			2,543	125	n/a	n/a	n/a	n/a	20
			3,480	119	n/a	n/a	n/a	n/a	30

Scan QR code above for ordering format and more detailed information

### THE INFORMATION YOU NEED - ALL IN ONE PLACE

Visit [www.atlasled.com](http://www.atlasled.com) or scan QR code more information, including cut sheets, case studies, installation videos, instruction sheets, savings information, IES files, lighting calculation tools and more.




\*The majority of Atlas Lighting Products are assembled in USA facilities by an American Workforce utilizing both Domestic and Foreign components. | \*Qualifies for Buy American under ARRA


# Eagles Series LED Area Light




## MULTIPLE DISTRIBUTION PATTERNS - ROTATABLE OPTICS




TYPE II



TYPE III



TYPE FT



TYPE V

## ORDERING INFORMATION

SLPM	9L	T3	4K					
PRODUCT SERIES	LUMEN PACKAGE	DISTRIBUTION	COLOR TEMP.	VOLTAGE	DIMMING	COLOR RENDERING	FIXTURE COLOR	OPTIONS
SLPS = Small Eagle Series Area Light SLPM = Eagle Series Area Light	6L = 6,000 Lumens <sup>1,2</sup> 9L = 9,000 Lumens <sup>1,2</sup> 12L = 12,000 Lumens <sup>2</sup> 18L = 18,000 Lumens <sup>2</sup> 24L = 24,000 Lumens <sup>2</sup> 30L = 30,000 Lumens <sup>2</sup> 36L = 36,000 Lumens <sup>2</sup> 43L = 43,000 Lumens <sup>2</sup> 50L = 50,000 Lumens <sup>2</sup>	T2 = Type 2 T3 = Type 3 <sup>2</sup> T5 = Type 5 FT = Forward Throw T2L = Type 2 Rotated Left T3L = Type 3 Rotated Left <sup>2</sup> FTL = Forward Throw Rotated Left T2R = Type 2 Rotated Right T3R = Type 3 Rotated Right <sup>2</sup> FTR = Forward Throw Rotated Right	3K = 3000K <sup>2</sup> 4K = 4000K 45K = 4500K 5K = 5000K	Blank = 120-277 4 = 347/480	Blank = 0-10vdc	Blank = 70CRI	Blank = Bronze BK = Black SL = Silver WT = White	PR = 7 Pin Photocell Receptacle SP = Surge Protection IC = Integrated Motion Control* M = Motion <sup>2</sup>  *Only available in 120-277V / Not available on Selectable Units
SELECTABLE								
SLPSS = Selectable Small Eagle Series Area Light SLPMS = Selectable Medium Eagle Series Area Light	6-12L = 6,000, 8,000, 12,000 Lumens Selectable <sup>1</sup> 12-24L = 12,000-24,000 Lumens Selectable <sup>2</sup> 25-50L = 25,000-50,000 Lumens Selectable <sup>2</sup>							<sup>1</sup> SLPS/SLPSS only <sup>2</sup> SLPM/SLPMS only

## QUICK & EASY INSTALLATION



Remove existing fixture. Install cleat (or bracket) to pole.



Slide fixture onto cleat.



Tighten bottom bolts and complete wiring.

# Origin Series LED Area Light

**LUMEN SELECTABLE**



- Multi-Mount Bracket Included
- Offers 180° of mounting angle adjustment.
- Both Type III and Type V optics are included in the box.



HOUSING	UNIT	DISTRIBUTION	CRI	4000K CCT		5000K CCT		WATTAGE	REPLACES UP TO
				DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)		
ORALSEL	12-24L	T3	80	8,347	155	7,928	147	54	175W MH
		T5	80	8,241	153	8,124	150		
		T3	80	11,651	149	11,067	142	78	175W MH
		T5	80	11,503	147	11,339	145		
		T3	80	14,845	143	14,101	136	104	250W MH
		T5	80	14,656	141	14,447	139		
		T3	80	17,253	136	16,388	129	127	400W MH
		T5	80	17,033	134	16,790	132		
		T3	80	19,701	129	18,713	122	153	400W MH
		T5	80	19,451	127	19,173	125		

Scan QR code above for ordering format and more detailed information

# Origin Series LED Area Light

**FULLY SELECTABLE**

— ☀ — LUMEN • CCT



- Multi-Mount Bracket Included
- Offers 180° of mounting angle adjustment.
- Both Type III and Type V optics are included in the box.



HOUSING	UNIT	DISTRIBUTION	CRI	3000K CCT		4000K CCT		5000K CCT		WATTAGE	REPLACES UP TO
				DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)		
ORASEL	15-22L	T3	70	14,836	146	15,306	155	15,415	152	100	250W
		T5	70	15,390	152	15,908	159	16,104	157		
		T3	70	17,526	142	18,130	152	18,076	148	120	400W
		T5	70	17,979	148	18,670	157	18,817	153		
		T3	70	20,834	138	21,551	148	21,347	142	150	400W
		T5	70	22,349	142	23,287	152	23,205	145		
	30-43L	T3	70	30,197	148	31,993	161	32,486	159	200	400W
		T5	70	30,514	152	32,318	164	32,996	163		
		T3	70	35,331	143	37,689	157	38,238	154	240	1000W
		T5	70	35,439	148	37,746	161	38,414	158		
		T3	70	41,560	138	44,839	154	45,503	151	300	1000W
		T5	70	43,145	143	45,695	157	46,111	152		

Scan QR code above for ordering format and more detailed information

## ORIGIN SERIES SELECTABLE AREA LIGHTS



**SNAP-TIGHT MAGNETIC OPTIC SYSTEM**  
Scan to view video

# Eagles Series Small LED Area Light

## LUMEN SELECTABLE



- Easy to install, easy to maintain
- Optical Grade Individual Lenses
- Delivers Increased Footcandles



HOUSING	UNIT	DISTRIBUTION	CRI	4000K CCT		4500K CCT		5000K CCT		WATTAGE	REPLACES UP TO
				DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)		
SELECTABLE											
SLPSS	6-12L	T2	70	6,036	143	6,036	143	6,036	143	42	175W MH
		FT	70	5,899	140	5,859	139	5,859	139		
		T5	70	5,812	138	5,812	138	5,812	138		
		T2	70	8,946	142	8,946	142	8,946	142	63	175W MH
		FT	70	8,743	138	8,684	137	8,684	137		
		T5	70	8,614	136	8,614	136	8,614	136		
		T2	70	11,755	137	11,755	137	11,755	137	86	250W MH
		FT	70	11,488	134	11,410	133	11,410	133		
		T5	70	11,319	132	11,319	132	11,319	132		

HOUSING	UNIT	DISTRIBUTION	CRI	4000K CCT		4500K CCT		5000K CCT		WATTAGE	REPLACES UP TO
				DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)		
FIXED											
SLPS	6L	T2	70	6,297	154	6,288	153	6,288	153	41	175W MH
		FT	70	6,005	146	5,839	144	5,839	144		
		T5	70	6,025	147	6,016	147	6,016	147		
	9L	T2	70	9,041	144	8,859	142	8,859	142	63	175W MH
		FT	70	8,717	139	8,541	136	8,541	136		
		T5	70	8,639	138	8,465	135	8,465	135		
	12L	T2	70	12,028	136	11,822	133	11,822	133	89	250W MH
		FT	70	11,417	129	11,222	127	11,222	127		
		T5	70	11,578	131	11,380	129	11,380	129		

Scan QR code above for ordering format and more detailed information

## THE INFORMATION YOU NEED - ALL IN ONE PLACE

Visit [www.atlasled.com](http://www.atlasled.com) or scan QR code more information, including cut sheets, case studies, installation videos, instruction sheets, savings information, IES files, lighting calculation tools and more.



\*The majority of Atlas Lighting Products are assembled in USA facilities by an American Workforce utilizing both Domestic and Foreign components. | \*Qualifies for Buy American under ARRA



# Eagles Series Medium LED Area Light

**LUMEN SELECTABLE**



- Easy to install, easy to maintain
- Optical Grade Individual Lenses
- Delivers Increased Footcandles



HOUSING	UNIT	DISTRIBUTION	CRI	3000K CCT		4000K CCT		4500K CCT		5000K CCT		WATTAGE	REPLACES UP TO
				DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)		
SELECTABLE													
SLPMS	12-24L	T2	70	12,646	160	12,646	160	12,646	160	13,434	170	79	250W MH
		T3	70	25,220	148	12,646	160	12,646	160	13,508	171		
		FT	70	12,646	160	12,646	160	12,646	160	13,278	168		
		T5	70	12,646	160	12,646	160	12,646	160	13,541	172		
		T2	70	18,707	151	18,707	151	18,707	151	19,872	161	124	400W MH
		T3	70	18,707	151	18,707	151	18,707	151	19,982	161		
		FT	70	18,707	151	18,707	151	18,707	151	19,642	159		
		T5	70	18,707	151	18,707	151	18,707	151	20,032	162		
		T2	70	23,741	141	23,741	141	23,741	141	25,220	148	171	400W MH
		T3	70	23,741	141	23,741	141	23,741	141	25,359	149		
		FT	70	23,741	141	23,741	141	23,741	141	24,928	146		
		T5	70	23,741	141	23,741	141	23,741	141	25,422	149		
	25-50L	T2	70	24,586	156	26,536	168	26,054	165	26,526	168	158	400W MH
		T3	70	24,584	156	26,535	168	26,052	165	26,524	168		
		FT	70	23,982	152	25,884	164	25,414	161	25,874	164		
		T5	70	24,504	155	26,448	167	25,967	164	26,438	167		
		T2	70	35,832	146	38,675	158	37,972	155	38,659	158	245	1000W MH
		T3	70	35,830	146	38,672	158	37,969	155	38,656	158		
		FT	70	34,952	143	37,725	154	37,039	151	37,709	154		
		T5	70	35,713	146	38,546	157	37,846	154	38,531	157		
		T2	70	43,678	132	48,164	145	47,289	142	48,145	145	332	1000W MH
		T3	70	43,675	132	48,161	145	47,285	142	48,141	145		
		FT	70	42,605	128	46,981	142	46,127	139	46,962	141		
		T5	70	43,533	131	48,004	145	47,132	142	47,985	145		

Scan QR code above for ordering format and more detailed information

## EAGLE SERIES



**QUICK & EASY INSTALLATION**  
Scan to view installation video



**CASE STUDIES**  
Scan to view

# Eagles Series Medium LED Area Light



- Easy to install, easy to maintain
- Optical Grade Individual Lenses
- Delivers Increased Footcandles



HOUSING	UNIT	DISTRIBUTION	CRI	3000K CCT		4000K CCT		4500K CCT		5000K CCT		WATTAGE	REPLACES UP TO
				DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)		
FIXED													
SLPM	6L	T2	70	5,908	153	6,067	158	6,093	159	6,152	160	39	175W MH
		T3	70	5,824	151	5,981	155	6,006	155	6,065	157		
		FT	70	5,712	148	5,866	152	5,891	153	5,948	154		
		T5	70	5,848	152	6,005	156	6,031	156	6,090	158		
	9L	T2	70	9,155	159	9,401	163	9,442	164	9,533	166	58	175W MH
		T3	70	9,082	158	9,326	162	9,366	163	9,457	164		
		FT	70	8,866	154	9,104	158	9,144	159	9,232	160		
		T5	70	9,086	158	9,330	162	9,370	163	9,461	164		
	12L	T2	70	10,962	148	11,513	154	11,513	154	11,602	156	75	250W MH
		T3	70	11,452	154	12,028	161	12,028	161	12,121	163		
		FT	70	11,335	153	11,905	159	11,905	159	12,601	169		
		T5	70	11,571	156	12,153	162	12,153	162	12,247	164		
	18L	T2	70	18,570	152	19,506	160	18,509	152	18,509	152	122	400W MH
		T3	70	17,810	146	19,489	160	18,493	152	18,493	152		
		FT	70	17,340	145	19,182	157	18,201	149	18,201	149		
		T5	70	17,820	146	19,650	161	18,645	153	18,645	154		
	24L	T2	70	23,640	138	25,447	149	24,146	141	24,146	141	171	400W MH
		T3	70	23,620	138	25,425	149	24,125	141	24,125	141		
		FT	70	23,030	135	25,025	146	23,745	139	23,745	139		
		T5	70	23,660	139	25,635	150	24,324	142	24,324	142		
	30L	T2	70	27,733	157	29,395	166	28,859	164	28,859	164	177	750W MH
		T3	70	28,077	158	29,759	168	29,216	165	29,216	165		
		FT	70	27,732	156	29,393	166	28,857	163	28,857	163		
		T5	70	28,228	159	29,920	169	29,374	166	29,374	166		
	36L	T2	70	33,249	151	35,542	162	34,796	159	34,796	159	219	1000W MH
		T3	70	31,780	144	35,603	162	34,856	159	34,856	159		
		FT	70	31,447	144	35,032	160	34,297	157	34,297	157		
		T5	70	32,353	146	35,323	160	34,582	157	34,582	157		
	43L	T2	70	38,344	139	41,750	152	41,258	150	41,258	150	275	1000W MH
		T3	70	37,142	134	42,070	153	41,575	151	41,575	151		
		FT	70	36,406	132	41,617	151	41,127	150	41,127	150		
		T5	70	38,344	139	42,470	154	41,970	152	41,970	152		
	50L	T2	70	46,091	138	48,821	147	47,962	144	47,962	144	333	1000W MH
		T3	70	46,439	139	49,190	148	48,324	145	48,324	145		
		FT	70	45,213	137	47,891	144	47,048	142	47,048	142		
		T5	70	46,755	140	49,524	149	48,652	146	48,652	146		

Scan QR code above for ordering format and more detailed information

## THE INFORMATION YOU NEED - ALL IN ONE PLACE

Visit [www.atlasled.com](http://www.atlasled.com) or scan QR code more information, including cut sheets, case studies, installation videos, instruction sheets, savings information, IES files, lighting calculation tools and more.



\*The majority of Atlas Lighting Products are assembled in USA facilities by an American Workforce utilizing both Domestic and Foreign components. | \*Qualifies for Buy American under ARRA



## Flood Lighting Brackets

HID | LED

### Bullhorn Brackets

	CATALOG#	DESCRIPTION	FINISH	WT/LBS.
	500-011BZ	2 In Line Bullhorn	Bronze	20
	500-012BZ	3 In Line Bullhorn	Bronze	31
	500-052BZ	3 @ 120° Bullhorn	Bronze	33
	500-022BZ	4 @ 90° Bullhorn	Bronze	43

### Side Mount Brackets

	CATALOG#	DESCRIPTION	FINISH
	500-018BZ	Right Angle Bracket (for Wall)	Bronze
	500-050BZ	Right Angle Bracket (for Pole)	Bronze
	500-054BZ	4" Side Tenon Mount Bracket	Bronze
	500-055BZ	8" Side Tenon Mount Bracket	Bronze
	500-060G	Side Angle Bracket	Galvanized

### RSR Brackets

	CATALOG#	DESCRIPTION	FINISH	WT/LBS.
	500-015BZ	2 In Line RSR Bracket	Bronze	20
	500-053BZ	4 In Line RSR Bracket	Bronze	37

### Miscellaneous Brackets

	CATALOG#	DESCRIPTION	FINISH
	500-006G*	Steel Cross Arm Bracket	Galvanized
	500-007G*	Single Flood Light Bracket	Galvanized
	500-082BZ	Post-Top Fitter for Knuckle	Bronze
	320-035BZ	Slipfitter for Trunnion Mount	Bronze
	280-032	Adjustable Post Top Fitter	Bronze
	320-200	Tenon Mount for SPT	Black
	500-009BZ	4" Drop In Tenon	Bronze
	500-010BZ	5" Drop In Tenon	Bronze
	500-066BZ	6" Drop In Tenon	Bronze
	500-063BZ	4-1/4" Tenon Adapter for Round Poles	Bronze
	500-008BZ	3-1/4" Tenon Adapter for Round Poles	Bronze

\*For Wood Pole Mount Only

Scan QR code above for more detailed information



## Sports Lighting Brackets

LED

### Metal & Wood Pole Brackets

	CATALOG#	DESCRIPTION	FINISH	WT/LBS.
	500-001G	2 Light Bracket	Galvanized	1
	500-002G	3 Light Bracket	Galvanized	1
	500-003G	4 Light Bracket	Galvanized	1

	CATALOG#	DESCRIPTION	FINISH	WT/LBS.
	500-004G	5 Light Bracket	Galvanized	1
	500-005G	6 Light Bracket	Galvanized	1

Scan QR code above for more detailed information

### UNIVERSAL BRACKET SYSTEM



Scan to view video




CASE STUDIES  
Scan to view






## Area Lighting Universal Bracket System FITS ANY POLE

### Round Pole Adapter

	CATALOG#	DESCRIPTION	FINISH
	500-SLPMRPA	Round Pole Bracket	Bronze


Mounting Cleat Included with Fixture

### Square Pole Tenon Adapter - Up to 4 @ 90°

	CATALOG#	DESCRIPTION	FINISH
	500-SPTBZ	For Square Poles w/ Tenon	Bronze


Mounting Cleat Included with Fixture

### Square or Round Pole w/ Tenon - Up to 4 @ 90°

	CATALOG#	DESCRIPTION	FINISH
	500-RPT90BZ	For Tenon Up to 4 @ 90°	Bronze


Mounting Cleat Included with Fixture

### Square or Round Pole w/ Tenon - Up to 3 @ 120°

	CATALOG#	DESCRIPTION	FINISH
	500-RPT120BZ	For Tenon 3 @ 120°	Bronze


Mounting Cleat Included with Fixture

### Round Pole Top Adapter - Up to 4 @ 90°

	CATALOG#	DESCRIPTION	FINISH
	500-RPT-243490BZ	2.3" - 3.4" Pole Top O.D.	Bronze
	500-RPT-35490BZ	3.5" - 4" Pole Top O.D.	Bronze


Mounting Cleat Included with Fixture

### Round Pole Top Adapter - Up to 3 @ 120°

	CATALOG#	DESCRIPTION	FINISH
	500-RPT-2434120BZ	2.3" - 3.4" Pole Top O.D.	Bronze


Mounting Cleat Included with Fixture

### Wall Brackets

	CATALOG#	DESCRIPTION	FINISH
	500-WBBZ	Wall Mount Bracket	Bronze


Note: Not to be used as junction box.

### Wooden Pole Bracket


	CATALOG#	DESCRIPTION	FINISH
	500-WPBBZ	Wooden Pole Bracket	Bronze

Mounts to wood poles 8"-12" in diameter  
Note: Not to be used as junction box.

### Spoke Arm Brackets

	CATALOG#	DESCRIPTION	FINISH
	500-SAB21	Spoke Arm Bracket for SLP22	Bronze

### Angled Bracket

	CATALOG#	DESCRIPTION	FINISH
	500-AAB	Angled Bracket for SLP	Bronze

Note: All brackets are available in bronze, black, silver or white finishes.

Scan QR code above for more detailed information

## THE INFORMATION YOU NEED - ALL IN ONE PLACE

Visit [www.atlasled.com](http://www.atlasled.com) or scan QR code more information, including cut sheets, case studies, installation videos, instruction sheets, savings information, IES files, lighting calculation tools and more.



\*The majority of Atlas Lighting Products are assembled in USA facilities by an American Workforce utilizing both Domestic and Foreign components. | \*Qualifies for Buy American under ARRA

# Dual Deal Luminaire/Pole Combo



## Simple & Easy

Atlas offers our top area light paired with our highest quality poles in a deal that offers



## EAGLE/POLE COMBO

HOUSING	UNIT	DISTRIBUTION	CRI	3000K CCT		4000K CCT		4500K CCT		5000K CCT		WATTAGE	REPLACES UP TO
				DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)		
FIXED													
PXSLPS	9L	FT	70	n/a	n/a	8,717	139	8,541	136	8,541	136	63	175W
		T5	70	n/a	n/a	8,639	138	8,465	135	8,465	135		
	12L	FT	70	n/a	n/a	11,417	129	11,222	127	11,222	127	89	250W
		T5	70	n/a	n/a	11,578	131	11,380	129	11,380	129		
PXSLPM	18L	T2	70	18,570	152	19,506	160	18,509	152	18,509	152	122	400W MH
		T3	70	17,810	146	19,489	160	18,493	152	18,493	152		
		FT	70	17,340	145	19,182	157	18,201	149	18,201	149		
		T5	70	17,820	146	19,650	161	18,645	153	18,645	154		
	24L	T2	70	23,640	138	25,447	149	24,146	141	24,146	141	171	400W MH
		T3	70	23,620	138	25,425	149	24,125	141	24,125	141		
		FT	70	23,030	135	25,025	146	23,745	139	23,745	139		
		T5	70	23,660	139	25,635	150	24,324	142	24,324	142		
	43L	T2	70	38,344	139	41,750	152	41,258	150	41,258	150	275	1000W MH
		T3	70	37,142	134	42,070	153	41,575	151	41,575	151		
		FT	70	36,406	132	41,617	151	41,127	150	41,127	150		
		T5	70	38,344	139	42,470	154	41,970	152	41,970	152		
	50L	T2	70	46,091	138	48,821	147	47,962	144	47,962	144	333	1000W MH
		T3	70	46,439	139	49,190	148	48,324	145	48,324	145		
		FT	70	45,213	137	47,891	144	47,048	142	47,048	142		
		T5	70	46,755	140	49,524	149	48,652	146	48,652	146		
SELECTABLE													
PXSLPSS	6-12L	T2	70	n/a	n/a	6,036	143	6,036	143	6,036	143	42	175W MH
		FT	70	n/a	n/a	5,899	140	5,859	139	5,859	139		
		T5	70	n/a	n/a	5,812	138	5,812	138	5,812	138		
		T2	70	n/a	n/a	8,946	142	8,946	142	8,946	142		
		FT	70	n/a	n/a	8,743	138	8,684	137	8,684	137	63	175W MH
		T5	70	n/a	n/a	8,614	136	8,614	136	8,614	136		
		T2	70	n/a	n/a	11,755	137	11,755	137	11,755	137		
		FT	70	n/a	n/a	11,488	134	11,410	133	11,410	133		
PXSLPMS	12-24L	T5	70	n/a	n/a	11,319	132	11,319	132	11,319	132	86	250W MH
		T2	70	12,646	160	12,646	160	12,646	160	13,434	170		
		T3	70	25,220	148	12,646	160	12,646	160	13,508	171		
		FT	70	12,646	160	12,646	160	12,646	160	13,278	168		
		T5	70	12,646	160	12,646	160	12,646	160	13,541	172	124	400W MH
		T2	70	18,707	151	18,707	151	18,707	151	19,872	161		
		T3	70	18,707	151	18,707	151	18,707	151	19,982	161		
		FT	70	18,707	151	18,707	151	18,707	151	19,642	159		
	25-50L	T5	70	18,707	151	18,707	151	18,707	151	20,032	162	171	400W MH
		T2	70	23,741	141	23,741	141	23,741	141	25,220	148		
		T3	70	23,741	141	23,741	141	23,741	141	25,359	149		
		FT	70	23,741	141	23,741	141	23,741	141	24,928	146		
		T5	70	23,741	141	23,741	141	23,741	141	25,422	149	158	400W MH
		T2	70	26536	168	26054	165	26526	168	13,434	170		
		T3	70	26535	168	26052	165	26524	168	13,508	171		
		FT	70	25884	164	25414	161	25874	164	13,278	168		
		T5	70	26448	167	25967	164	26438	167	13,541	172	245	1000W MH
		T2	70	38675	158	37972	155	38659	158	19,872	161		
		T3	70	38672	158	37969	155	38656	158	19,982	161		
		FT	70	37725	154	37039	151	37709	154	19,642	159		
		T5	70	38546	157	37846	154	38531	157	20,032	162	332	1000W MH
		T2	70	48164	145	47289	142	48145	145	25,220	148		
		T3	70	48161	145	47285	142	48141	145	25,359	149		
		FT	70	46981	142	46127	139	46962	141	24,928	146		
		T5	70	48004	145	47132	142	47985	145	25,422	149		

Scan QR code above for ordering format and more detailed information



# Area Lighting Poles



- Steel, Aluminum, Concrete, Fiberglass
- Square, Round, Straight, Tapered, etc.




THE FOLLOWING SQUARE STRAIGHT STEEL POLES  
ARE PART OF OUR QUICK SHIP PROGRAM:

PART #	HEIGHT	WIDTH	WALL THICKNESS
<b>DRILLED</b>			
SSS12411BZQSLB5	12'	4"	11 gauge
SSS15411BZQSLB5	15'	4"	11 gauge
SSS20411BZQSLB5	20'	4"	11 gauge
SSS25411BZQSLB5	25'	4"	11 gauge
<b>TENON TOP</b>			
SSS20411TBZQSLB	20'	4"	11 gauge
SSS25411TBZQSLB	25'	4"	11 gauge

Scan QR code above for ordering format and more detailed information

- All Poles Ship Within (2) Business Days After Order Is Placed
- All Poles Drilled For (4) Fixtures At 90°\*
- All Poles Supplied With (3) Sets Of Plugs For Unused Holes\*
- All Poles Standard Bronze
- Maximum Of (10) Poles Per Order On All Quick Ship Orders
- Anchor Bolts Are Sent Same Day As Order Is Placed

\*For drilled poles only. Tenon top not included.

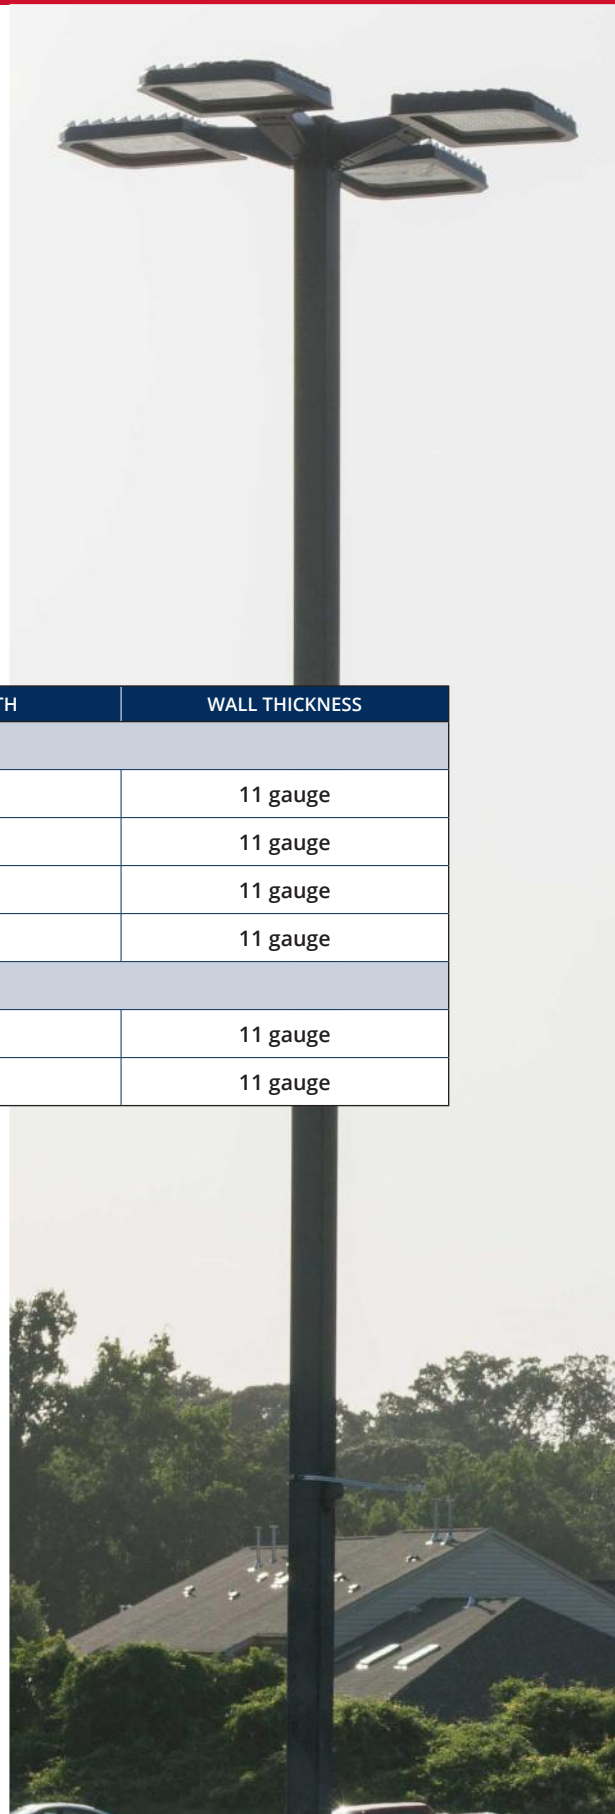


## American Made

Experience complete versatility, fast availability, and unmatched durability


## Complete Versatility

Endless Options, Made to Order

Completely configurable: choose from a wide variety of materials, finishes, sizes and styles to best suit your application and budget.

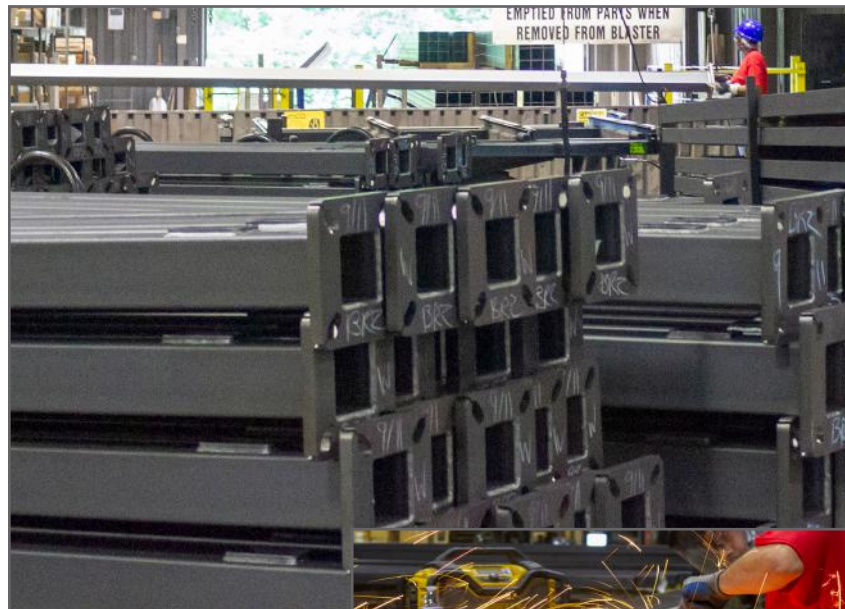

- Steel, Aluminum or Fiberglass
- Heights from under 10' to greater than 39' and everything in between
- Round, Square, Straight, Tapered, Hinged or Decorative

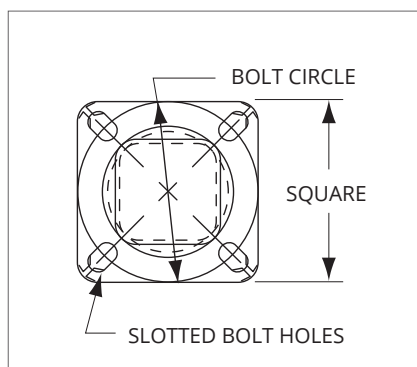

Wide offering of base plates with large range of customization to accommodate existing anchor bolts in retrofit applications.



## Fast Availability

### Industry-Leading Lead Times


Atlas Poles ship as soon as 5 days from the point of ordering. Our customer service representatives will walk you through the pole configuration process to ensure accuracy and quick order submission



## Unmatched Durability

### Stands Up to Harsh Environments

Designed and engineered for durability and provided as standard with our oven-baked DuraGrip Protection System. Also available with Atlas' proprietary DuraGrip+ Protection System for unmatched corrosion protection and extended warranty.

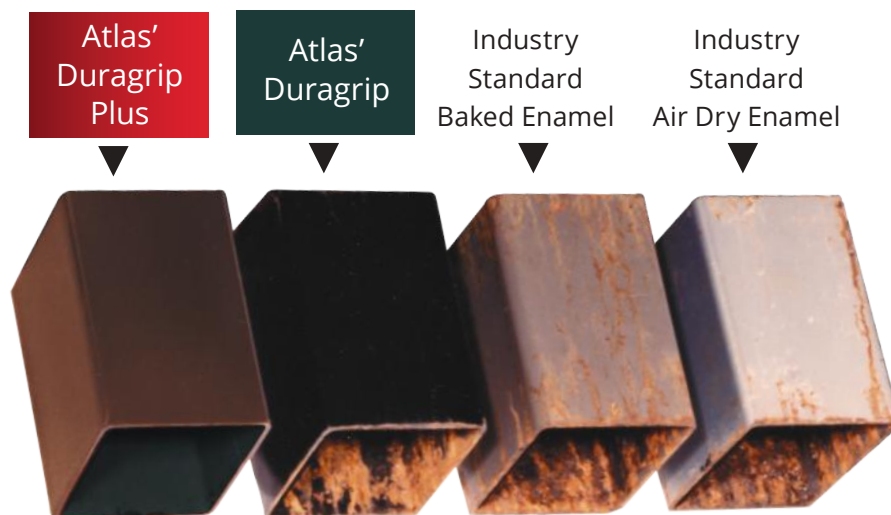

Poles After 1000hrs of Salt Spray Test





# Independence Series Linear LED High Bay

## LUMEN SELECTABLE



- Easy to install, easy to maintain
- Optical Grade Individual Lenses
- Delivers Increased Footcandles



HOUSING	UNIT	LENS	CRI	4000K CCT		4500K CCT		5000K CCT		WATTAGE	REPLACES UP TO
				DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)		
SELECTABLE											
IHBS	12-24L	Clear	80	12,967	158	12,967	158	13,011	157	83	175W MH
			80	19,045	152	19,045	152	19,110	153	125	400W MH
			80	23,843	146	23,843	146	23,924	147	163	250W MH
	12-24LD	Diffused	80	11,587	141	11,523	139	11,523	139	83	250W MH
			80	16,954	136	16,860	135	16,860	135	125	175W MH
			80	21,281	132	21,163	131	21,163	131	162	400W MH
	15-30L	Clear	80	14,135	158	14,135	158	14,435	158	90	175W MH
			80	21,037	152	21,037	152	21,483	156	138	400W MH
			80	27,560	145	27,560	145	28,145	148	190	250W MH
	15-30LD	Diffused	80	12,931	144	12,931	144	13,241	145	91	250W MH
			80	19,317	140	19,317	140	19,780	143	138	175W MH
			80	25,353	133	25,353	133	25,961	136	190	400W MH
	15-30LN	Narrow	80	13,463	150	13,463	150	13,721	150	91	175W MH
			80	20,006	145	20,006	145	20,389	147	138	400W MH
			80	26,318	138	26,318	138	26,822	141	190	250W MH

HOUSING	UNIT	LENS	CRI	4000K CCT		4500K CCT		5000K CCT		WATTAGE	REPLACES UP TO
				DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)		
FIXED											
IHB	12L	Clear	80	12,528	152	12,528	159	12,597	160	83	175W MH
	12LD	Diffused	80	11,358	138	11,358	138	11,421	139	82	
	12LN	Narrow	80	11,089	143	11,089	143	11,501	145	79	
	15L	Clear	80	16,144	154	16,144	152	16,513	157	105	250W MH
	15LD	Diffused	80	14,567	140	14,567	140	14,949	143	105	
	15LN	Narrow	80	14,652	140	14,652	140	15,196	145	105	
	18L	Clear	80	18,597	153	18,597	153	19,022	156	122	250W MH
	18LD	Diffused	80	16,767	137	16,767	137	17,207	141	122	
	18LN	Narrow	80	16,766	138	16,766	138	17,389	143	122	
	24L	Clear	80	23,910	148	23,899	148	23,899	148	162	400W MH
	24LD	Diffused	80	21,506	133	21,404	136	21,404	136	162	
	24LN	Narrow	80	21,363	132	21,363	132	21,491	133	162	
	30L	Clear	80	29,550	159	29,550	159	30,370	166	186	400W MH
	30LD	Diffused	80	26,470	143	26,470	143	27,343	149	185	
	30LN	Narrow	80	26,488	143	26,488	143	27,097	148	185	

Scan QR code above for ordering format and more detailed information

## INDEPENDENCE HIGH BAY SERIES



**PRODUCT VIDEO**  
Scan to view video



**CASE STUDIES**  
Scan to view





## Independence Series Linear LED High Bay



- Easy to install, easy to maintain
- Optical Grade Individual Lenses
- Delivers Increased Footcandles



HOUSING	UNIT	LENS	CRI	4000K CCT		4500K CCT		5000K CCT		WATTAGE	REPLACES UP TO
				DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)		
IHB	30L2	Clear	80	28,347	160	28,347	160	29,134	165	177	400W MH
	30LD2	Diffused	80	25,537	145	25,537	145	26,379	149		
	30LN2	Narrow	80	25,400	144	25,400	144	25,552	145		
	36L2	Clear	80	37,194	153	37,194	153	38,044	156	244	1000W MH
	36LD2	Diffused	80	33,534	137	33,534	137	34,414	141		
	36LN2	Narrow	80	33,532	138	33,532	138	34,778	143		
	48L2	Clear	80	47,820	148	47,798	148	47,798	148	324	1000W MH
	48LD2	Diffused	80	43,012	133	42,808	136	42,808	136		
	48LN2	Narrow	80	42,726	132	42,726	132	42,982	133		
	60L2	Clear	80	59,100	159	59,100	159	60,740	166	371	1000W MH
	60LD2	Diffused	80	52,940	143	52,940	143	54,686	149		
	60LN2	Narrow	80	52,976	143	52,976	143	54,194	148		

Scan QR code above for ordering format and more detailed information



## Independence Series Linear LED High Bay



- Easy to install, easy to maintain
- Optical Grade Individual Lenses
- Delivers Increased Footcandles



HOUSING	UNIT	LENS	CRI	4000K CCT		4500K CCT		5000K CCT		WATTAGE	REPLACES UP TO
				DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)		
IHB	72L3	Clear	80	71730	148	71697	148	71697	148	485	1000W MH
	72LD3	Diffused	80	64518	133	64212	133	64212	133	162	
	72LN3	Narrow	80	64089	132	64089	132	64473	133	486	
	90L3	Clear	80	88650	159	88650	159	91110	166	557	1500W MH
	90LD3	Diffused	80	79410	143	79410	143	82029	149	557	
	90LN3	Narrow	80	79464	143	79464	143	81291	148	556	

Scan QR code above for ordering format and more detailed information

### THE INFORMATION YOU NEED - ALL IN ONE PLACE

Visit [www.atlasled.com](http://www.atlasled.com) or scan QR code more information, including cut sheets, case studies, installation videos, instruction sheets, savings information, IES files, lighting calculation tools and more.



\*The majority of Atlas Lighting Products are assembled in USA facilities by an American Workforce utilizing both Domestic and Foreign components. | \*Qualifies for Buy American under ARRA



## 2' Linear LED High Bay NARROW BODY



- 20-gauge steel housing
- 91% efficiency high-transmission lens\*
- Tool-free driver compartment



HOUSING	UNIT*	CRI	4000K CCT		4500K CCT		5000K CCT		WATTAGE	REPLACES UP TO
			DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)		
ILH2	9L	80	10,300	139	10,300	139	10,300	139	74	4L T8 FL
	9LL	80	9,631	130	9,631	130	9,635	131	74	
ILHS2	12L	80	12,421	151	12,303	146	12,503	152	84	175W MH
	12LL	80	11,580	140	11,485	137	11,580	140	84	
	15L	80	15,277	154	14,915	148	15,277	154	101	250W MH
	15LL	80	14,353	144	13,841	137	14,353	144	101	

Scan QR code above for ordering format and more detailed information

\*Suffix LL = with lens

## 2' Linear LED High Bay WIDE BODY



- 20-gauge steel housing
- 91% efficiency high-transmission lens\*
- Tool-free driver compartment



HOUSING	UNIT	CRI	4000K CCT		4500K CCT		5000K CCT		WATTAGE	REPLACES UP TO
			DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)		
ILH2	18L	80	20,240	139	20,240	139	20,240	139	146	4L T8 FL
	18LL	80	18,870	130	18,870	130	18,870	130	145	
	24L	80	25,342	152	25,870	138	25,342	152	167/187	175W MH
	24LL	80	23,757	143	24,230	130	23,757	143	167/187	
	30L	80	30,716	154	n/a	n/a	30,716	154	199	250W MH
	30LL	80	28,757	144	n/a	n/a	28,757	144	199	

Scan QR code above for ordering format and more detailed information

\*Suffix LL = with lens

### LINEAR HIGH BAY SERIES



**PRODUCT VIDEO**  
Scan to view video



**CASE STUDIES**  
Scan to view



## 4' Linear LED High Bay NARROW BODY



- 20-gauge steel housing
- 91% efficiency high-transmission lens\*
- Tool-free driver compartment



HOUSING	UNIT	CRI	4000K CCT		4500K CCT		5000K CCT		WATTAGE	REPLACES UP TO
			DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)		
ILH4	15L	80	15,819	148	15,267	148	15,267	153	103	250W MH
	15LL	80	14,914	145	14,393	140	14,393	140		
	18L	80	18,270	145	17,632	139	17,632	139	126	250W MH
	18LL	80	17,231	137	16,630	132	16,630	132		
ILHS4	24L	80	26,102	156	25,191	150	25,191	150	167	400W MH
	24LL	80	24,698	148	23,836	142	23,836	142		
	30L	80	31,151	153	30,064	147	30,064	147	204	400W MH
	30LL	80	29,500	145	28,470	139	28,470	139		

Scan QR code above for ordering format and more detailed information

\*Suffix LL = with lens

## 4' Linear LED High Bay WIDE BODY



- 20-gauge steel housing
- 91% efficiency high-transmission lens\*
- Tool-free driver compartment



HOUSING	UNIT	CRI	4000K CCT		4500K CCT		5000K CCT		WATTAGE	REPLACES UP TO
			DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)		
ILH4	36L	80	37,295	156	35,993	151	35,993	151	239	250W MH
	36LL	80	35,162	147	33,935	142	33,935	147	239	
	48L	80	46,352	151	44,734	146	44,734	146	307	400W MH
	48LL	80	43,528	142	42,009	137	42,009	137	306	

Scan QR code above for ordering format and more detailed information

\*Suffix LL = with lens

### THE INFORMATION YOU NEED - ALL IN ONE PLACE

Visit [www.atlasled.com](http://www.atlasled.com) or scan QR code more information, including cut sheets, case studies, installation videos, instruction sheets, savings information, IES files, lighting calculation tools and more.



\*The majority of Atlas Lighting Products are assembled in USA facilities by an American Workforce utilizing both Domestic and Foreign components. | \*Qualifies for Buy American under ARRA

## Origin Series Die Cast Linear High Bay

**FULLY SELECTABLE**  
- ☀ + LUMEN • CCT



- Replace up to 6 standard high bays with just 1
- Durable die-cast aluminum construction
- Built-in Connect Control Port requires no wiring to connect the IRH-MOT sensor



HOUSING	UNIT	CRI	4000K CCT		5000K CCT		WATTAGE	REPLACES UP TO
			DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)		
ORHBS	12-21L	80	10,986	134	10,986	134	82	175W MH
			14,304	134.9	14,304	134.9	106	250W MH
			17,037	134.1	17,037	134.1	127	400W MH
	22-30L	80	22,493	151	23,012	152	150	400W MH
			24,259	148	25,024	150	165	400W MH
			30,609	138	31,221	141	222	400W MH

Scan QR code above for more detailed information

## Origin Series Round LED High Bay

**FULLY SELECTABLE**  
- ☀ + LUMEN • CCT




- Die Cast Aluminum Construction
- J-hook mounting
- Center Motion Mount Capable



HOUSING	UNIT	CRI	SELECTABLE 4000K CCT		SELECTABLE 5000K CCT		WATTAGE	REPLACES UP TO
			DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)		
ORRHS	18-30L	80	19,382	168	19,109	161	120	175W MH
		80	25,458	162	24,420	153	160	250W MH
		80	30,544	157	30,000	150	200	400W MH

Scan QR code above for ordering format and more detailed information

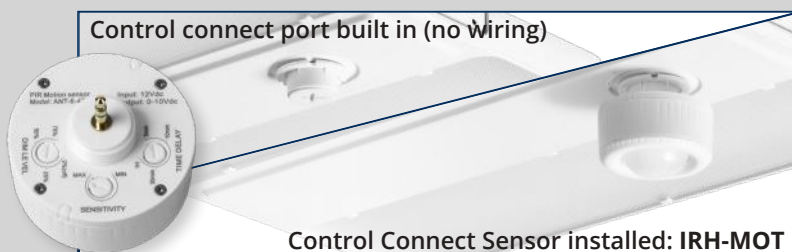

# Round LED High Bay

**FULLY SELECTABLE**

- LUMEN • CCT



- Replace 9 standard fixtures with just 1
- Die Cast Aluminum Construction
- Polycarbonate Lens



**480V**  
AVAILABLE

HOUSING	UNIT	CRI	SELECTABLE 4000K CCT		SELECTABLE 4500K CCT		SELECTABLE 5000K CCT		WATTAGE	REPLACES UP TO
			DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)		
IRHS	18-30L	80	18,090	134	20,790	154	18,765	139	135	175W MH
		80	24,120	134	27,720	154	25,020	139	180	250W MH
		80	30,742	123	34,253	144	31,535	125	238	400W MH

Scan QR code above for ordering format and more detailed information



## High Bay Options & Accessories

### ORRHS & IRHS Motion Sensors

	CATALOG#	DESCRIPTION
	IRH-MOT	<b>Control Connect Sensor (120, 277V)</b> <ul style="list-style-type: none"> <li>- Provides multi-level control based on motion</li> <li>- Controls 0-10 VDC LED drivers</li> <li>- 3 levels of control: Time (3-60 mins), Sensitivity and Dimming (0-75%)</li> <li>- No remote needed. Settings stay if power is interrupted.</li> </ul>

### ORRHS & IRHS Pendant Mount

	CATALOG#	DESCRIPTION
	ORHBSPMK	<b>Pendant Mount Adapter Kit; Fits 3/4" NPT</b>

### IRHS Optical Accessories

	CATALOG#	DESCRIPTION
	RHB16SAR	<b>Spun Aluminum Reflector</b>
	RHB16FGC	<b>16" Flat Glass and Clamp Band</b>
	RHB16WG	<b>16" Wireguard</b>
	RHB16PAR	<b>Prismatic Acrylic Refractor</b>
	RHB16CLC	<b>16" Conical Lens and Clamp Band</b>

Scan QR code above for more detailed information

## THE INFORMATION YOU NEED - ALL IN ONE PLACE

Visit [www.atlasled.com](http://www.atlasled.com) or scan QR code more information, including cut sheets, case studies, installation videos, instruction sheets, savings information, IES files, lighting calculation tools and more.



\*The majority of Atlas Lighting Products are assembled in USA facilities by an American Workforce utilizing both Domestic and Foreign components. | \*Qualifies for Buy American under ARRA

## 2' Linear LED Wet Location NARROW BODY



- One-piece high-impact durable housing
- Injection-molded frosted acrylic lens
- IP65/IP66/IP67 rating



HOUSING	UNIT	CRI	4000K CCT		4500K CCT		5000K CCT		WATTAGE	REPLACES UP TO
			DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)		
ILW	25LED2D	80	4,455	142	4,455	142	4,624	144	32	70W MH

Scan QR code above for ordering format and more detailed information

## 4' Linear LED Wet Location NARROW BODY **LUMEN SELECTABLE**



- One-piece high-impact durable housing
- Injection-molded frosted acrylic lens
- IP65/IP66/IP67 rating



HOUSING	UNIT	CRI	4000K CCT		4500K CCT		5000K CCT		WATTAGE	REPLACES UP TO
			DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)		
ILWS	4-8L	80	4,027	147	4,027	147	3,998	146	27	2L T8 FL
		80	5,912	145	5,912	145	5,870	144	41	2L T5 FL
		80	7,889	140	7,889	140	7,833	140	56	4L T8 FL
HOUSING	UNIT	CRI	4000K CCT		4500K CCT		5000K CCT		WATTAGE	REPLACES UP TO
			DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)		
ILW	30LED4D	80	4,270	144	4,270	144	4,307	143	30	2L T5 FL
	48LED4D	80	7,093	149	7,047	147	7,047	147	48	4L T8 FL

Scan QR code above for ordering format and more detailed information

## 8' Linear LED Wet Location NARROW BODY **LUMEN SELECTABLE**



- One-piece high-impact durable housing
- Injection-molded frosted acrylic lens
- IP65/IP66/IP67 rating



HOUSING	UNIT	CRI	4000K CCT		4500K CCT		5000K CCT		WATTAGE	REPLACES UP TO
			DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)		
ILWS	7-13L	80	6,846	154	6,824	153	6,824	153	45	4L T8 FL
		80	10,302	153	10,269	152	10,269	152	68	4L T5 FL
		80	13,863	146	13,819	146	13,819	146	95	4L T5 FL
	10-20L	80	10,221	142	10,190	142	10,159	141	72	4L T8 FL
		80	15,063	140	15,017	140	14,972	139	108	4L T5 FL
		80	20,222	136	20,161	134	20,100	134	150	4L T5 FL
HOUSING	UNIT	CRI	4000K CCT		4500K CCT		5000K CCT		WATTAGE	REPLACES UP TO
			DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)		
ILW	76LED8D	80	11,581	154	11,506	153	11,506	153	75	4L T5 FL
	98LED8D	80	14,067	150	13,976	149	13,976	149	94	4L T5 FL

Scan QR code above for ordering format and more detailed information

### LINEAR WET LOCATION SERIES



**PRODUCT VIDEO**  
Scan to view video



**CASE STUDIES**  
Scan to view



## 2' Linear LED Wet Location WIDE BODY



- One-piece high-impact durable housing
- Injection-molded frosted acrylic lens
- IP65/IP66/IP67 rating



HOUSING	UNIT	CRI	4000K CCT		4500K CCT		5000K CCT		WATTAGE	REPLACES UP TO
			DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)		
ILW	76LED2WD	80	10,380	149	10,380	149	10,380	149	75	4L T5 FL
	98LED2WD	80	13,570	143	13,570	143	13,570	143	95	4L T5 FL
	130LED2WD	80	16,930	132	16,930	132	16,930	132	129	6L T5 FL

Scan QR code above for ordering format and more detailed information

## 4' Linear LED Wet Location WIDE BODY

**LUMEN SELECTABLE**



- One-piece high-impact durable housing
- Injection-molded frosted acrylic lens
- IP65/IP66/IP67 rating



HOUSING	UNIT	LENS	CRI	4000K CCT		4500K CCT		5000K CCT		WATTAGE	REPLACES UP TO
				DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)		
SELECTABLE											
ILWS	13-27L	Frosted	80	12,863	149	12,840	149	12,840	149	86	6L T5 FL
			80	19,377	149	19,342	149	19,342	149	130	
			80	26,320	144	26,272	143	26,272	143	184	
		Clear	80	12,863	149	12,840	149	12,840	149	86	6L T5 FL
			80	19,377	149	19,342	149	19,342	149	130	
			80	26,320	144	26,272	143	26,424	144	183	

HOUSING	UNIT	CRI	4000K CCT		4500K CCT		5000K CCT		WATTAGE	REPLACES UP TO
			DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)		
FIXED										
ILW	98LED4WD	80	14,033	147	14,033	147	14,130	148	96	4L T5 FL
	130LED4WD	80	17,821	142	17,821	142	17,621	140	126	6L T5 FL
	190LED4WD	80	27,480	144	27,480	144	27,480	144	191	6L T5 FL

Scan QR code above for ordering format and more detailed information

### THE INFORMATION YOU NEED - ALL IN ONE PLACE

Visit [www.atlasled.com](http://www.atlasled.com) or scan QR code more information, including cut sheets, case studies, installation videos, instruction sheets, savings information, IES files, lighting calculation tools and more.



\*The majority of Atlas Lighting Products are assembled in USA facilities by an American Workforce utilizing both Domestic and Foreign components. | \*Qualifies for Buy American under ARRA

## Potomac Series Linear Wet Location RETROFIT KITS




- Installs in less than 5 minutes
- Easy upgrade to LED with gear tray retrofit
- Reduce power consumption up to 50%



HOUSING	UNIT	SIZE	CRI	4000K CCT		4500K CCT		5000K CCT		WATTAGE	REPLACES UP TO
				DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)		
ILWRK	30LED4D	4' Narrow	80	4,511	143	4,511	143	4,508	143	30	2 Lamp T8
	48LED4D		80	6,695	138	6,695	138	6,695	138	48	2 Lamp T5
	76LED8D		80	10,650	143	10,650	143	10,650	143	76	2 Lamp T8
	98LED8D	8' Narrow	80	13,060	138	13,060	138	13,060	138	98	2 Lamp T5
	98LED8D		80	14,130	147	14,130	147	14,130	147	98	4 Lamp T8
	130LED4WD	4' Wide	80	17,590	135	17,590	135	17,590	135	130	6 Lamp T8
	190LED4WD		80	27,480	144	27,480	144	27,480	144	190	6 Lamp T5

Scan QR code above for ordering format and more detailed information

## Independence Series 4' Linear Wet Location

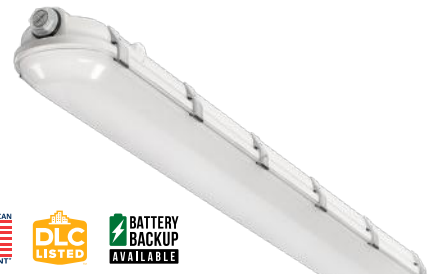

HOUSING	UNIT	CRI	4000K CCT		4500K CCT		5000K CCT		WATTAGE	REPLACES UP TO
			DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)		
IVT	5L	80	5,010	148	4,849	143	4,849	143	34	4L T8 FL

Scan QR code above for ordering format and more detailed information

## Origin Series 4' LED Vapor Tight



- Frosted injection-molded acrylic lens eliminates glare
- Uses durable latches to secure the lens to the housing
- Origin products are backed by the same US-based customer service



HOUSING	UNIT	CRI	4000K CCT		WATTAGE	REPLACES UP TO
			DELIVERED LUMENS	EFFICACY (LPW)		
ORVT	44L	80	4,500	113	40	2L T5 FL

Scan QR code above for more detailed information

### POTOMAC WET LOCATION RETROFIT KITS



**QUICK & EASY INSTALLATION**  
Scan to view installation video



**CASE STUDIES**  
Scan to view

# Field Adjustable Edge Lit Panels

1x4 | 2x2 | 2x4

**FULLY SELECTABLE**  
-☀+ LUMEN • CCT



- Field adjustable lumen output and color temperature
- Quick connects for easy installation
- PMMA lens designed not to yellow



UNIT	FIXTURE LENGTH	CRI	SELECTABLE 3500K CCT		SELECTABLE 4000K CCT		SELECTABLE 5000K CCT		WATTAGE	REPLACES UP TO
			DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)		
FAELP14	1'x4'	>80	3,102	121	3,274	132	3,154	123	25	(2) F32-T8
			3,513	118	3,748	130	3,570	120	30	
			4,398	110	4,767	125	4,464	112	40	
FAELP22	2'x2'	>80	3,187	121	3,385	133	3,259	122	25	(3) F24-T5
			3,599	117	3,863	131	3,683	119	30	
			4,412	109	4,856	126	4,542	111	40	
FAELP24	2'x4'	>80	3,248	112	3,413	120	3,409	117	30	(4) F32-T8
			3,702	109	3,921	119	3,891	115	35	
			4,698	104	5,046	115	4,971	110	45	

Scan QR code above for more detailed information



## Origin Series Backlit Panels

1x4 | 2x2 | 2x4

**FULLY SELECTABLE**  
-☀+ LUMEN • CCT



- Replace 9 standard panels with just 1 fixture
- Low-profile design makes installation quick and easy
- Origin products are backed by the same US-based customer service



UNIT	FIXTURE LENGTH	CRI	SELECTABLE 3500K CCT		SELECTABLE 4000K CCT		SELECTABLE 5000K CCT		WATTAGE	REPLACES UP TO
			DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)		
ORBLP14SEL	1'x4'	80	1,875	125	1,875	125	1,875	125	15	(2) F32-T8
			3,125	125	3,125	125	3,125	125	25	
			4,125	125	4,125	125	4,125	125	33	
ORBLP22SEL	2'x2'	80	1,875	125	1,875	125	1,875	125	15	(3) F24-T5
			3,125	125	3,125	125	3,125	125	25	
			4,125	125	4,125	125	4,125	125	33	
ORBLP24SEL	2'x4'	80	3,500	125	3,500	125	3,500	125	28	(4) F32-T8
			4,750	125	4,750	125	4,750	125	38	
			6,000	125	6,000	125	6,000	125	48	

Scan QR code above for more detailed information

### THE INFORMATION YOU NEED - ALL IN ONE PLACE

Visit [www.atlasled.com](http://www.atlasled.com) or scan QR code more information, including cut sheets, case studies, installation videos, instruction sheets, savings information, IES files, lighting calculation tools and more.



\*The majority of Atlas Lighting Products are assembled in USA facilities by an American Workforce utilizing both Domestic and Foreign components. | \*Qualifies for Buy American under ARRA

## Origin Series Linear Wrap

**FULLY SELECTABLE**  
- ☀️ + LUMEN • CCT



- Cold-rolled steel metal housing with a 22-gauge thickness
- Toolless lens install feature saves installation time and effort
- Origin products are backed by the same US-based customer service



HOUSING	UNIT	CRI	SELECTABLE 3500K CCT		SELECTABLE 4000K CCT		SELECTABLE 5000K CCT		WATTAGE
			DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	
ORWS	3-5L	80	2,539	127	2,712	138	2,577	129	20
		80	3,799	121	4,057	135	3,856	127	30
		80	4,937	111	5,272	131	5,010	123	40

Scan QR code above for ordering format and more detailed information

## Origin Series LED Strips

4' | 8'

**FULLY SELECTABLE**  
- ☀️ + LUMEN • CCT



- Rigid 24 gauge steel housing
- Lightweight & durable
- Origin products are backed by the same US-based customer service



HOUSING	UNIT	CRI	SELECTABLE 3000K CCT		SELECTABLE 3500K CCT		SELECTABLE 4000K CCT		SELECTABLE 5000K CCT		WATTAGE
			DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	
ORSTS4	3-5L	80	2,729	137	2,860	145	2,901	149	2,889	147	20W
		80	3,975	130	4,229	140	4,315	145	4,228	139	30W
		80	5,125	122	5,465	134	5,594	140	5,465	133	40W
ORSTS8	8-10L	80	8,472	141	9,065	151	9,242	154	9,005	150	60W
		80	9,300	133	10,043	143	10,211	146	9,996	143	70W
		80	10,161	125	10,931	135	11,188	138	10,922	136	80W


Scan QR code above for ordering format and more detailed information

## Origin Series LED Strips

2' | 8'



- Lightweight and durable 22-gauge post-painted housing
- High-brightness LEDs protected by a frosted lens
- Origin products are backed by the same US-based customer service

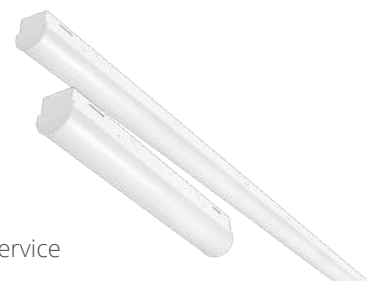

HOUSING	UNIT	CRI	4000K CCT		WATTAGE	REPLACES UP TO
			DELIVERED LUMENS	EFFICACY (LPW)		
ORST2	2L	80	2,564	128	20	70W MH
ORST8	8L	80	8,450	130	65	4L T8 FL

Scan QR code above for more detailed information

### FIELD ADJUSTABLE EDGE LIT PANELS



**PRODUCT VIDEO**  
Scan to view video



**CASE STUDIES**  
Scan to view



# Linear Strips

4' | 8'

**FULLY SELECTABLE**  
- ☀️ + LUMEN • CCT 🌈



- Lightweight and durable 22-gauge post-painted housing
- Fixture can be mounted individually or in continuous row mounting
- Frosted acrylic lens eliminates bright spots and provides high vertical illumination



LUMEN PACKAGE	UNIT	CRI	SELECTABLE 4000K CCT		SELECTABLE 4500K CCT		SELECTABLE 5000K CCT		WATTAGE
			DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	
SELECTABLE									
ILSS4	4-7L	80	4,635	158	4,895	167	4,682	159	29
			5,813	154	6,140	162	5,872	155	38
			7,404	147	7,820	161	7,479	147	51
ILSS4	4-7LL	80	4,175	142	4,412	150	4,222	144	29
			5,236	139	5,534	146	5,295	140	38
			6,614	131	6,990	144	6,688	132	50
ILSS8	8-14L	80	8,056	171	8,410	178	7,941	168	47
			11,867	168	12,388	175	11,697	165	71
			15,831	161	16,526	168	15,604	159	98
ILSS8	8-14LL	80	7,335	156	7,657	162	7,230	153	47
			10,746	152	11,218	159	10,592	150	71
			14,307	146	14,935	159	14,102	144	98

Scan QR code above for ordering format and more detailed information

# Industrial Grade Stairwell Light

2' | 4'



- Cold rolled die formed steel housing
- Prismatic high-transmission lens
- Factory-installed ultrasonic motion sensor



HOUSING	UNIT	CRI	3500K CCT		4000K CCT		5000K CCT		WATTAGE	REPLACES UP TO
			DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)		
SWL2	2L	80	1,918	119	1,968	123	2,032	127	16	70W MH
	3L	80	2,852	124	2,967	129	3,036	132	23	4L T8 FL
SWL4	5L	80	4,788	133	5,011	139	5,040	140	36	4L T8 FL
	6L	80	5,720	130	5,940	135	6,028	137	44	
	8L	80	7,750	125	8,044	129	8,184	132	62	

Scan QR code above for ordering format and more detailed information

## THE INFORMATION YOU NEED - ALL IN ONE PLACE

Visit [www.atlasled.com](http://www.atlasled.com) or scan QR code more information, including cut sheets, case studies, installation videos, instruction sheets, savings information, IES files, lighting calculation tools and more.



\*The majority of Atlas Lighting Products are assembled in USA facilities by an American Workforce utilizing both Domestic and Foreign components. | \*Qualifies for Buy American under ARRA





## Origin Series Low Profile Troffers


1x4 | 2x2 | 2x4

### FULLY SELECTABLE

- ☀ + LUMEN • CCT



- Replace 9 standard panels with just 1 fixture
- Low-profile design makes installation quick and easy
- Origin products are backed by the same US-based customer service

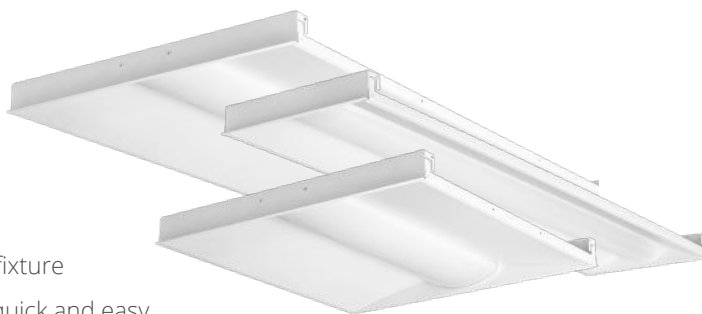

UNIT	FIXTURE LENGTH	CRI	SELECTABLE 3500K CCT		SELECTABLE 4000K CCT		SELECTABLE 5000K CCT		WATTAGE	REPLACES UP TO
			DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)		
TLP14S2-4L	1'x4'	>80	2,609	130	2,715	137	2,591	129	20	(3) F24-T5
			3,262	130	3,433	137	3,239	129	25	
			3,838	125	3,993	136	3,811	124	30	
TLP22S2-4L	2'x2'	>80	3,804	135	3,933	143	3,891	137	30	(3) F24-T5
			4,378	133	4,531	140	4,472	135	35	
			4,853	122	4,998	127	4,982	125	40	
TLP24S4-6L	2'x4'	>80	4,188	140	4,315	148	4,259	143	32	(4) F32-T8
			5,586	133	5,675	143	5,400	135	42	
			6,428	127	6,760	137	6,490	128	52	

Scan QR code above for more detailed information



## Origin Series Commercial Downlights

4" | 6" | 8"

### FULLY SELECTABLE

- ☀ + LUMEN • CCT



- 16 gauge spun aluminum reflector housing
- Custom engineered reflectors for wide distribution
- Origin products are backed by the same US-based customer service



UNIT	FIXTURE LENGTH	CRI	DELIVERED LUMENS	EFFICACY (LPW)	WATTAGE
CDL4SEL1-2L	4"	≥ 90	1,000	100	10
			1,500	100	15
			2,000	100	20
CDL6SEL1-2L	6"	≥ 90	1000	100	10
			1,500	100	15
			2,000	100	20
CDL8SEL3-5L	8"	≥ 90	3,300	95	35
			4,000	95	42
			5,000	96	52

Scan QR code above for more detailed information

A full line of accessories also available, including Goof Rings, Emergency Drivers, Trim & Baffle and Plates for T-Grid & Stud/Joist Ceilings. Scan QR code above for more details.








## Linear High Bay & Wet Location Options & Accessories


### Factory Installed Options

	SUFFIX #	DESCRIPTION
	IC	<b>Integrated Control (120, 277V)</b> <ul style="list-style-type: none"> <li>- Omni-Directional Infrared Motion Sensor</li> <li>- Photocell Sensor for Daylight Harvesting</li> <li>- Bi-Level Switching</li> </ul>
	M	<b>360° Motion Sensor (120, 277V)</b> <ul style="list-style-type: none"> <li>- 2 Interchangeable, Application Specific Lenses (Aisle, High Bay, Low Bay)</li> </ul>
	M2	<b>360° Motion Sensor (208,240,480V)</b> <ul style="list-style-type: none"> <li>- 2 Interchangeable, Application Specific Lenses (Aisle, High Bay, Low Bay)</li> </ul>
	IMSBT2L	<b>Integral Bluetooth PIR motion and photo sensor up to 40ft</b> <ul style="list-style-type: none"> <li>- 2 Interchangeable, Application Specific Lenses (Aisle, High Bay, Low Bay)</li> </ul>
	ALBCS2	<b>AirLink Blue Wireless PIR Motion &amp; Photo Sensor Controller</b> <ul style="list-style-type: none"> <li>- 5-40' mounting height) For low mounting height below 20ft</li> <li>- Substitute "2" in nomenclature with "1"</li> </ul>
	L	<b>Tool-less Snap On Lens</b> <ul style="list-style-type: none"> <li>- Frosted Acrylic Lens</li> <li>- 91% Efficiency</li> <li>- Provides Improved Visual Comfort</li> <li>- High Impact w/ Scratch Resistant Surface</li> <li>- Provides Wider, Smoother &amp; Uniform Light Output</li> <li>- Protects LEDs</li> </ul>
	W	<b>Wireguard for Narrow High Bay - installed</b> <ul style="list-style-type: none"> <li>- Protects Fixtures from Hazards</li> <li>- Tool-less Entry</li> <li>- Hinges Down</li> </ul>
	W	<b>Wireguard for Wide High Bay - installed</b> <ul style="list-style-type: none"> <li>- Protects Fixtures from Hazards</li> <li>- Tool-less Entry</li> <li>- Hinges Down</li> </ul>
	P	<b>Pendant Mount</b> <ul style="list-style-type: none"> <li>- Accepts 3/4" Rigid Conduit</li> <li>- Single Point Mounting</li> </ul>
	SP	<b>10Kv Surge Protector</b>

### Field Available Accessories

	CATALOG#	DESCRIPTION
	MS360	360° Motion Sensor (120, 277V)
	MS360-480	360° Motion Sensor (208, 240, 480V)
	MS360WL	Wet Location Motion Sensor (120, 277V)
	MS360WL-480	Wet Location Motion Sensor (208, 240, 480V)
	150-103WL45-4	45° Mounting Bracket (Pack of 2)
	150-103WL45-8	45° Mounting Bracket (Pack of 3)
	WGH33	Wireguard for Narrow 4' High Bay
	WGH36	Wireguard for Wide 4' High Bay
	CH36	36" Chain Set (Set of 2)
	CH36HFC	36" Chain Set w/ Hammer-On Flange
	CA36	36" Cable Set (Set of 2)
	PMK	Pendant Mount Kit for 4' High Bay
	PMK-2	Pendant Mount Kit for 2' High Bay
	80-SP	10Kv Surge Protection
	80-HS	Hook Set (2)

### Factory Installed Cord Sets

	SUFFIX #	DESCRIPTION
	xC*	x' Cord
	xT*	x' 120V Plug
	xE*	x' 208V Plug
	xF*	x' 240V Plug
	XS*	x' 277V Plug

\*x = 3 for 3' Cord; 6 for 6' cord, 10 for 10' cord and 20 for 20' cord lengths

Scan QR code above for more detailed information

## Thermoplastic LED Exit Sign



- Snap-fit faceplate design for installation without tools
- Removable universal chevrons for directional indications
- Single face and double face (extra faceplate included)



UNIT	DESCRIPTION	FINISH	LETTER COLOR	VOLTAGE
EXPRWR	Thermoplastic Exit Sign	White	Red	120/277
EXPRWG	Thermoplastic Exit Sign	White	Green	120/277
EXPRWRRC	Thermoplastic Exit Sign - Remote Capable	White	Red	120/277
EXPRWGRC	Thermoplastic Exit Sign - Remote Capable	White	Green	120/277

Scan QR code above for more detailed information

## Thermoplastic LED Exit/Emergency Combo



- Two factory-installed LED round lighting heads
- Snap-fit faceplate design for installation without tools
- Single face and double face (extra faceplate included)



UNIT	DESCRIPTION	FINISH	LETTER COLOR	VOLTAGE
EECPWR	Thermoplastic LED Exit/Emergency Combo	White	Red	120/277
EECPWG	Thermoplastic LED Exit/Emergency Combo	White	Green	120/277
EECPWRRC	Thermoplastic LED Exit/Emergency Combo - Remote Capable	White	Red	120/277
EECPWGRC	Thermoplastic LED Exit/Emergency Combo - Remote Capable	White	Green	120/277

Scan QR code above for more detailed information

## Oval 2-Headed LED Emergency Light



- Injection-molded, high-impact, UV-stabilized, UL94 V-0 thermoplastic construction
- Two factory-installed LED lamp heads are fully adjustable



UNIT	DESCRIPTION	LUMENS	FINISH	VOLTAGE
EMO2A	Oval 2 headed emergency light	88	White	120/277
EMO2ARC	Oval 2 headed emergency light - Remote Capable	88	White	120/277

Scan QR code above for more detailed information

## Architectural LED Emergency Light

**CCT SELECTABLE**



- Decorative, low-profile, architectural design
- Durable, die-cast housing is low profile and easy to install
- Sealed and gasketed to protect against the elements



UNIT	SELECTABLE 3500K CCT		SELECTABLE 4000K CCT		SELECTABLE 5000K CCT		WATTAGE
	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	
ERD12BZ	1,740	130	1,814	138	1,775	133	15

Scan QR code above for more detailed information

## Indoor/Outdoor LED Remote Heads



- Weatherproof plastic housing with LED assembly
- Flame-Retardant High Impact Thermoplastic Head(s)
- Die-cast cover plate for added durability




UNIT	DESCRIPTION	TOTAL WATTAGE	VOLTAGE
ERHR12	Single Remote Head - Indoor/Outdoor	1.17	3.6
ERHR22	Double Remote Head - Indoor/Outdoor	2.34	3.6

Scan QR code above for more detailed information


# Technical Information

## GENERAL

Most flood lights have optical designs that provide their best performance when aimed within a certain range.

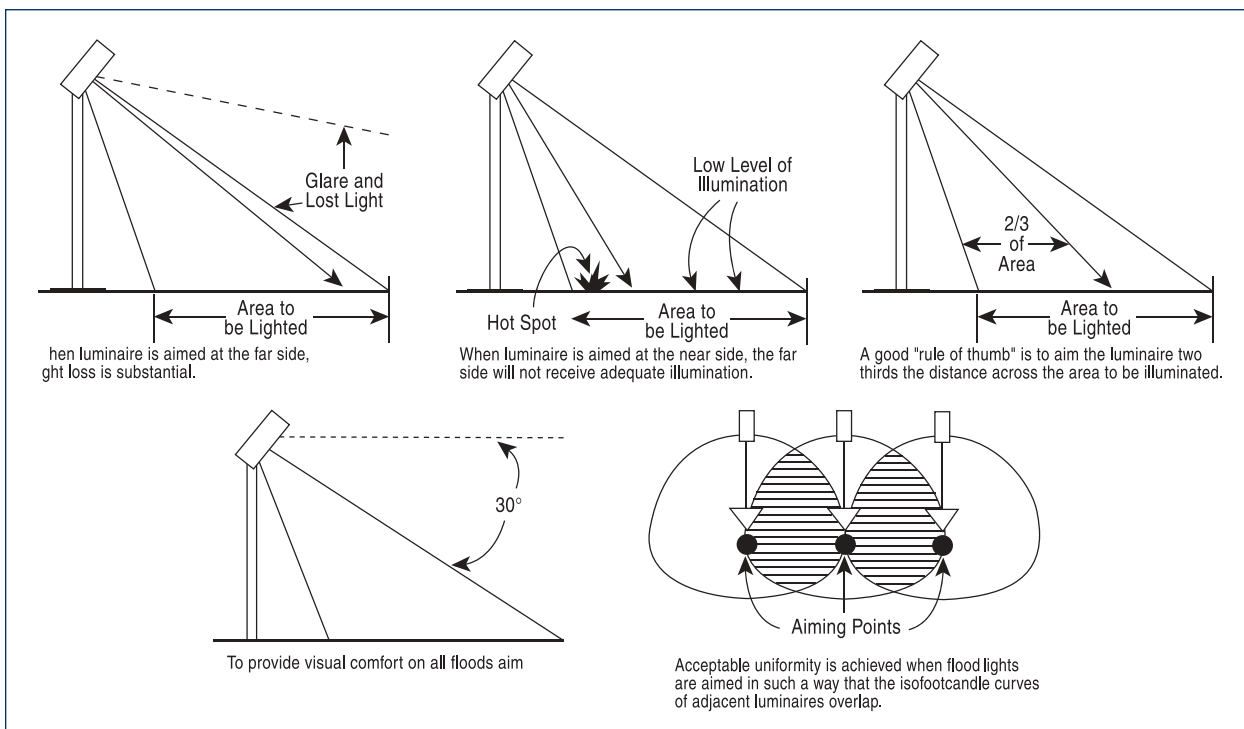

## Building Lighting General Rules

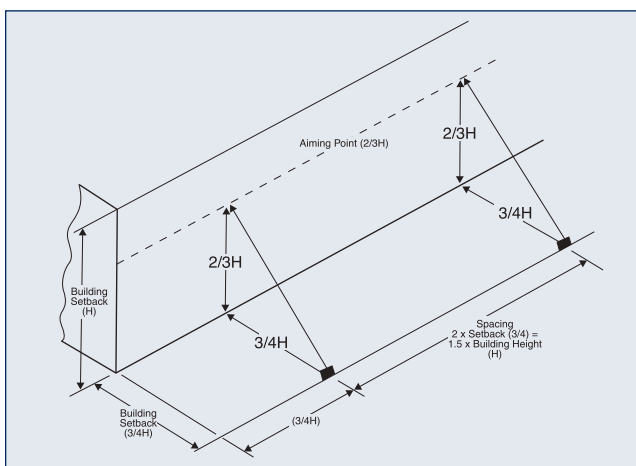

### Luminaire Setback from Building Facade:

3/4 the height of the building (or vertical distance). Closer will reduce uniformity, farther away will reduce lighting efficiency.

### Luminaire Spacing:

For uniform lighting the spacing should not exceed twice the setback.

### Ground Mounted Aiming:

The aiming point should be at least 2/3 up the building height. If the setback is reduced the aiming point must go higher.

## NEMA Classification Chart

Beam Spread Degree	NEMA Type of Designation
10 to 18°	1
18 to 29°	2
29 to 46°	3
46 to 70°	4
70 to 100°	5
100 to 130°	6
130° and over	7



# Technical Information


## GENERAL

### Aiming

Except for flood lights, most luminaires are mounted in a fixed position so that their vertical aiming naturally matches that shown on their isofootcandle charts. Flood light isofootcandle charts typically have an arrow that gives an aiming point on the chart and sets the vertical aiming angle. To achieve accurate results with a flood light layout, it is necessary to use the exact aiming shown on the chart during fixture installation. Any variation from the isofootcandle chart will require assistance from an Atlas Lighting Products representative to achieve good results.

### Multiple Fixtures

Determining fixture spacing that gives a minimum footcandle level can be easily performed using isofootcandle charts. The use of more than one fixture will result in a change in footcandle levels and the distribution pattern. Since a multi-fixture pattern is simply an additive combination of single patterns, reasonable estimates can be made in cases where multiple fixture combinations are not available. Single fixture charts can also be overlaid with the fixtures pointed in the appropriate directions, and the footcandle values added where contours cross.

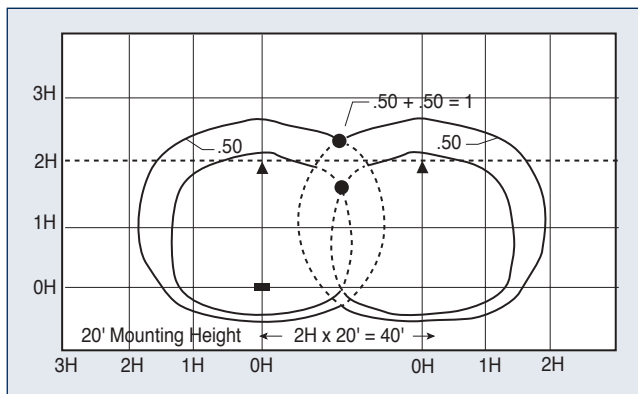


For example, if a minimum level of one footcandle between fixtures is desired, then fixture spacing should be adjusted so that touching contours have a combined minimum value of one footcandle. The same holds true regardless of the number of fixtures used.

Contact our technical service for computerized layouts.

### Isofootcandle Charts

Isofootcandle charts can be used for manual layouts that give minimum footcandle levels. Fixture quantities, locations, spacing and aiming can be determined with reasonable accuracy. The grid pattern is generally based upon units of fixture mounting height.

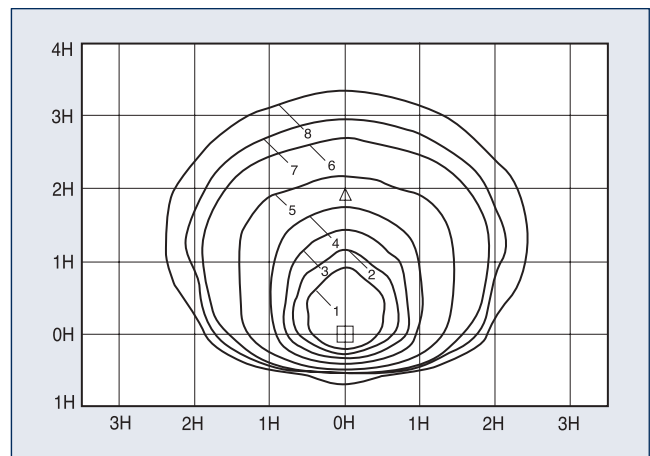

The shape and position of contours on the grid always remain the same, regardless of fixture mounting height. However, the footcandle values of the contours change when the mounting height changes. If the fixture is raised from 20 to 40 feet, the same quantity of light from the fixture will cover a larger area, so footcandle levels will be lower. Likewise, if a mounting height is lower than that indicated on the isofootcandle chart, the footcandle levels will increase. In most cases, a chart that provides footcandle values for the desired height is not shown, the following formula can be used to obtain correct footcandle values:

Multiply the existing footcandle levels shown at each contour with the new footcandle multiplier to get the correct values.

$$\frac{(\text{Old MH})}{(\text{New MH})} = \text{New Footcandle Multiplier}$$


Old MH = Mounting Height shown on chart squared  
New MH = New Mounting Height squared

# Technical Information

## GENERAL

### Classifications

The following diagrams show a plan view of the distribution of light cast by different types of luminaires; the luminaire is represented by a black square. The arrows show the direction of the maximum intensity.

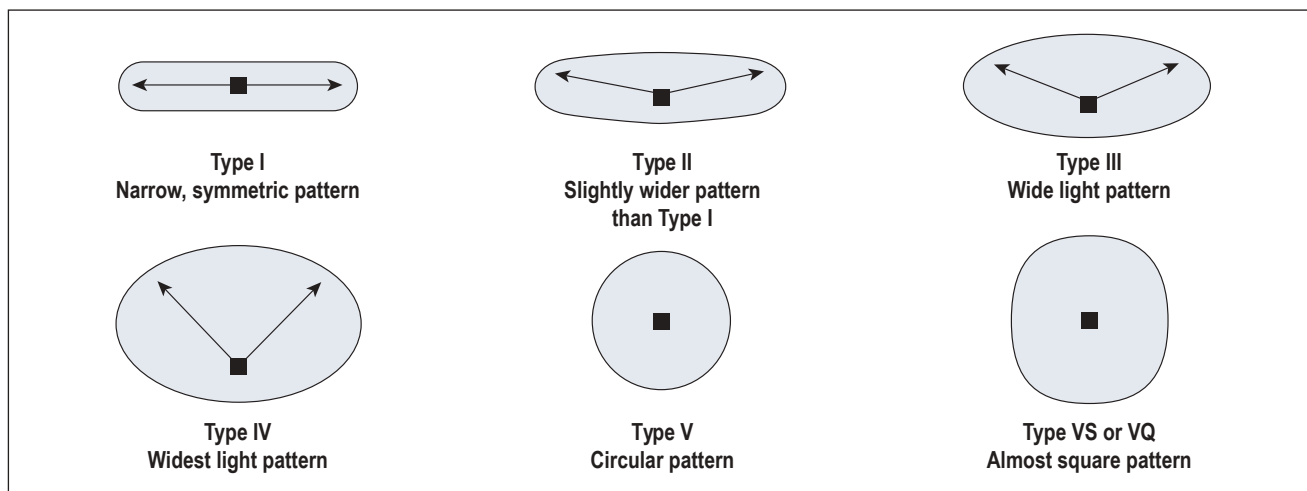


### Cut Off Classifications

Cut-Off	Intensity at 80° does not exceed 100 candelas per 1000 lamp lumens, nor 25 candelas per 1000 lamp lumens at 90°
Semi-Cut-Off	Intensity at 80° does not exceed 200 candelas per 1000 lamp lumens, nor 50 candelas per 1000 lamp lumens at 90°
Non-Cut-Off	No intensity (candela) limitations

### Sports Lighting Classifications

NEMA field angle classifications and their effective projection distances.

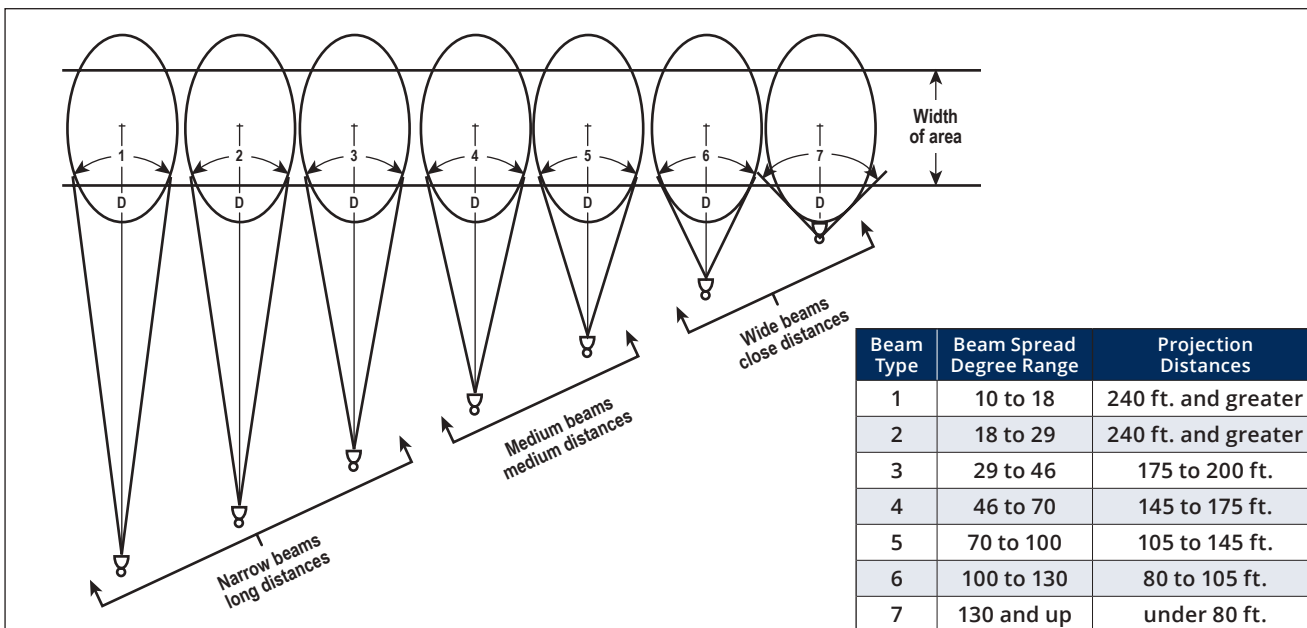


# Technical Information

## GENERAL

### Flag Lighting


- It is recommended to use at least 2 lights, preferably 3 in a triangle around the flag pole. This will ensure the flag is well lit at rest and also when the wind is blowing in different directions
- Fixtures should be set back 1/3 the height of the pole. (Example: 30' Pole = 10' Setback)
- A flood light with a narrow beam spread is typically desired.
- Fixtures that supply an average of 10fc are recommended for low-light residential areas and 20fc for bright public areas.
- Use the Design Guidelines chart below to help determine which Atlas fixture will meet your lighting needs.

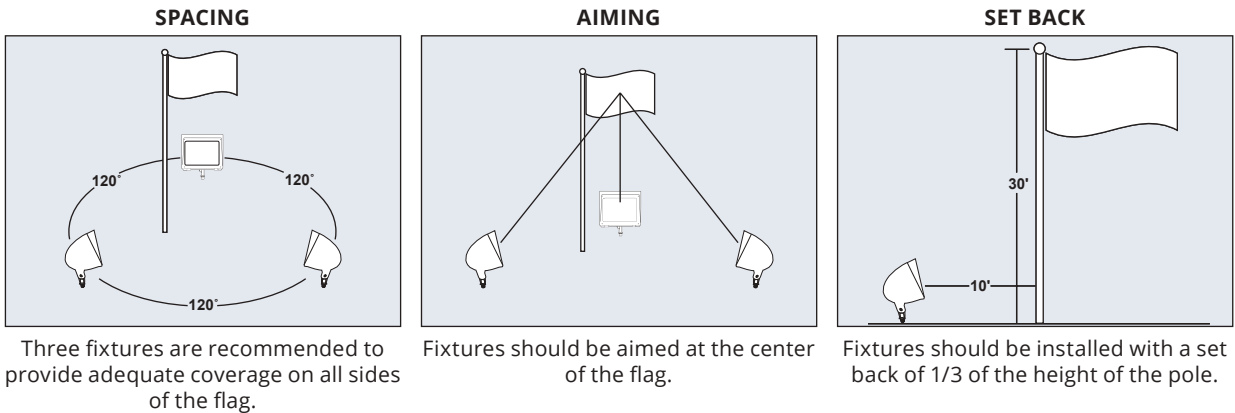

### Design Guidelines

Pole Height	Set Back	Wattage	Atlas Part #	Description
20'	7'	43W	PFM43LED	Medium Flood Light
25'	8'	43W	PFM43LED	Medium Flood Light
30'	10'	43W	PFM43LED	Medium Flood Light
35'	12'	84W	PFL84LED	Large Flood Light
40'	13'	84W	PFL84LED	Large Flood Light

### Mounting Base Guidelines

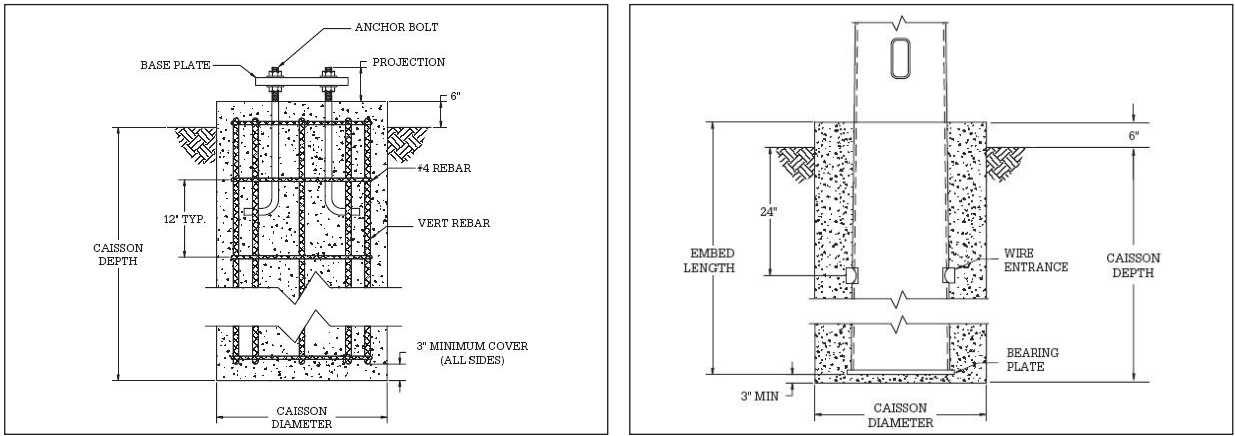

# Outdoor

## Recommended Minimum Light Levels

<b>AIRPORTS</b>			
Hanger Aprons	.....	1	
Terminal Apron-Parking	.....	0.5	
Terminal Apron-Loading	.....	2	
<b>BUILDING CONSTRUCTION</b>			
General Construction	.....	10	
Excavation	.....	2	
<b>BUILDING/MONUMENTS</b>			
(Surroundings)	.....	Dark/Bright	
Light Surfaces	.....	5/15	
Medium Surfaces	.....	10/20	
Medium-Dark Surfaces	.....	15/30	
Dark Surfaces	.....	20/50	
<b>BULLETIN BOARDS</b>			
Light Surfaces	.....	20/50	
Dark Surfaces	.....	50/100	
<b>LOADING PLATFORMS</b>			20
<b>PARKING AREAS</b>			
Vehicular Traffic			
Low Activity	.....	0.5	
Medium Activity	.....	1	
High Activity	.....	2	
Pedestrian Traffic			
Low Activity	.....	0.2	
Medium Activity	.....	0.6	
High Activity	.....	0.9	
Pedestrian Security			
Low Activity	.....	0.8	
Medium Activity	.....	2	
High Activity	.....	4	
<b>RAILROAD YARDS</b>			
Switch Points	.....	2	
Hump Area	.....	20	
<b>SHIPYARDS</b>			
General	.....	5	
Ways	.....	10	
Fabrication	.....	30	
<b>STORAGE YARDS</b>			
Active	.....	20	
Inactive	.....	1	
<b>ARCHERY</b>			
Target, Tournament	.....	10	
Target, Recreational	.....	5	
<b>BADMINTON</b>			
Tournament	.....	30	
Club	.....	20	
Recreational	.....	10	
<b>BASEBALL</b>		Infield/Outfield	
Major Leagues	.....	150/100	
AA/AAA Leagues	.....	70/50	
A and B Leagues	.....	50/30	
C and D Leagues	.....	30/20	
Semi-Pro/Municipal	.....	20/15	
Recreational	.....	15/10	
Junior Leagues	.....		
Class I and II	.....	30/20	
Combination	.....		
Football/Baseball	.....	20/15	
<b>BASKETBALL</b>			
College/Professional	.....	50	
College Intramural	.....	30	
High School	.....	30	
Recreational	.....	10	
<b>CASTING, BAIT, DRY OR WET FLY</b>			
Pier or Dock	.....	10	
Target	.....	5	
<b>FOOTBALL</b>		(Distance from nearest sideline to farthest row of spectators)	
Class I, over 100 ft. (30m)	.....	100	
Class II, 50-100 ft. (15-30 m)	.....	50	
Class III, 30-50 ft. (9-15 m)	.....	30	
Class IV, under 30 ft. (9m)	.....	20	
Class V, no fixed seating	.....	10	
<b>GOLF</b>			
Tee	.....	5	
Fairway	.....	1 H/3	
Green	.....	5	
Driving Range at	.....		
200 yds. (180m)	.....	5	
Driving Range Tee	.....	10	
Miniature Course	.....	10	
Practice Putting Green	.....	10	
<b>HANDBALL</b>			
Club, 2 court	.....	20	
Recreational, 2 court	.....	10	
<b>HOCKEY, FIELD</b>			20
<b>HOCKEY, ICE (Outdoor)</b>			
College/Professional	.....	50	
Amateur	.....	20	
Recreational	.....	10	
<b>LACROSSE</b>			20
<b>PLAYGROUND</b>			5
<b>RACING</b>			
Auto	.....	20	
Bicycle	.....		
Tournament	.....	30	
Competitive	.....	20	
Recreational	.....	10	
Dragstrip, Staging	.....	10	
Acceleration	.....		
1320 ft (400m)	.....	20	
Deceleration,	.....		
1st 600 ft (200m)	.....	15	
Deceleration,	.....		
2nd 600 ft (200m)	.....	10	
Shutdown, 820 ft (250m)	.....	5	
Horse	.....	20	
<b>RIFLE RANGE</b>			
On Targets	.....	50	
Firing Point	.....	10	
Range	.....	5	
<b>SHUFFLEBOARD</b>			
Tournament	.....	10	
Recreational	.....	5	
<b>SKEET OR TRAP SHOOTING</b>			
Targets	.....	30	
Firing Point	.....	5	
<b>SOFTBALL INFIELD/OUTFIELD</b>			
Professional	.....	50/30	
Semi-Pro	.....	30/20	
Industrial	.....	20/15	
Recreational	.....	10/7	
<b>SWIMMING (Outdoor)</b>			
Exhibitions	.....	20	
Recreational	.....	10	
<b>TENNIS</b>			
Tournament	.....	30	
Club	.....	20	
Recreational	.....	10	

# Indoor

## Recommended Minimum Light Levels

<b>AIRPLANE MANUFACTURING</b>		
Assembly, inspection, hanger .....	100	
Drilling, riveting, screw fastening .....	70	
Welding .....	50	
<b>ASSEMBLY</b>		
Rough, easy seeing .....	30	
Rough, difficult seeing .....	50	
Medium .....	100	
<b>AUDITORIUMS</b>		
Social Activities .....	5	
Assembly only .....	15	
Exhibitions .....	30	
<b>AUTOMOBILE MANUFACTURING</b>		
Final assembly, finishing, inspecting .....	200	
Body & chassis assembly ..	100	
Body & parts manufacturing	70	
Frame assembly .....	50	
<b>BANKS</b>		
Lobby, general .....	50	
Writing areas .....	70	
Tellers' stations .....	150	
Posting and keypunch ....	150	
<b>BASKETBALL</b>		
Regulation .....	50	
Recreation .....	30	
<b>CANNING AND PRESERVING</b>		
Cutting, pitting, final sorting, continuous belt canning sink canning .....	100	
General hand packing .....	50	
Can unscramblers .....	70	
Labeling and cartoning ....	30	
<b>CLOTHING MANUFACTURING</b>		
Receiving, storing, shipping, winding, measuring ..	30	
Pattern making, trimming ..	50	
Shops, marking .....	100	
<b>DEPOTS, TERMINALS, STATIONS</b>		
Concourse .....	10	
Platforms .....	20	
Waiting, restrooms .....	30	
Baggage .....	50	
Ticket counter .....	100	
<b>ELECTRICAL EQUIPMENT MANUFACTURING</b>		
Impregnating .....	50	
Insulation: coil, winding, testing .....	100	
<b>FOUNDRIES</b>		
Annealing furnaces .....	30	
Cleaning .....	30	
Core making .....	100	
<b>GARAGES-MOTOR VEHICLES</b>		
Storage .....	5	
Traffic Lanes		
Parking garage .....	10	
Service garage .....	20	
Entrances .....	50	
Repair area .....	100	
<b>GLASS MANUFACTURING</b>		
Mix and furnace rooms, pressing and lehr, glass blowing machines .....	30	
Grinding, cutting, silvering .....	50	
Fine grinding, leveling, polishing .....	100	
<b>GYMNASIUMS</b>		
Assemblies .....	10	
General exercise and recreation .....	30	
Exhibitions, matches .....	50	
<b>HOCKEY, ICE</b>		
Professional .....	100/200	
Amateur .....	50	
Recreational .....	20	
<b>IRON AND STEEL MANUFACTURING</b>		
Stock, hot top, checker, cellar, calcining .....	10	
Building, slag pits, striping yard .....	20	
Control platforms, repairs, mixer building .....	30	
Rolling mills .....	20	
Shearing .....	50	
Tin plating .....	50	
Motor room, machine room .....	30	
Inspection .....	100	
<b>LIBRARY</b>		
Ordinary reading, stacks ...	30	
Book repair and binding ...	50	
Study and notes, cataloging, card files, check desk ..	70	
<b>MACHINE SHOPS</b>		
Rough bench .....	50	
Medium bench, rough grinding, buffing .....	100	
<b>MATERIALS HANDLING</b>		
Loading, trucking .....	20	
Picking stock, classifying ...	30	
Wrapping, packing, labeling	50	
<b>MEAT PACKING</b>		
Slaughtering .....	30	
Cleaning, canning .....	100	
<b>OFFICES</b>		
Reading, transcribing .....	70	
Regular office work .....	100	
Accounting, auditing, tabulating, business machine operation, rough drafting .....	150	
Cartography, designing, detailed drafting .....	200	
<b>PAINT SHOP</b>		
Spraying, rubbing, hand art stencil .....	50	
Fine hand painting and finishing .....	100	
<b>PAPER MANUFACTURING</b>		
Beaters, grinding .....	30	
Finishing, cutting .....	50	
Hand counting .....	70	
Paper machine reel, inspection .....	100	
Rewinder .....	150	
<b>POST OFFICE</b>		
Lobby and tables .....	30	
Mail sorting .....	100	
<b>PRINTING</b>		
Photo engraving, etching, blocking .....	50	
Color inspecting .....	200	
Presses .....	70	
<b>RUBBER GOODS AND TIRE MANUFACTURING</b>		
Plasticating, milling .....	30	
Fabric cutting, hose looms, molding .....	50	
Building, wrapping, curing ..	70	
<b>SHEET METAL WORKS</b>		
General .....	50	
Tin plate inspection, galvanized, scribing ..	200	
<b>STORES</b>		
Circulation area, stockroom	30	
Merchandising		
Serviced .....	100	
Self serviced .....	200	
<b>TESTING</b>		
General .....	50	
<b>TEXTILE MILLS COTTON</b>		
Picking, carding, roving, spinning .....	50	
Beaming and slashing ....	150	
Drawing .....	200	
Others .....	100	
<b>TEXTILE MILLS SILK AND SYNTHETICS</b>		
Soaking, tinting, conditioning .....	30	
Winding, slashing		
Light thread .....	50	
Dark thread .....	200	
Others .....	100	
<b>TOBACCO PRODUCTS</b>		
Drying, stripping, general ..	30	
<b>WAREHOUSING, STORAGE</b>		
Inactive .....	5	
Active		
Rough bulky .....	10	
Medium .....	20	
Fine .....	50	
<b>WELDING</b>		
General .....	50	
<b>WOODWORKING</b>		
Rough sawing and bench work .....	30	
Sizing, planing, gluing, sanding, veneering, medium quality bench work .....	50	
Fine bench work, fine sanding finishing .....	100	





PO Box 2348 Burlington, NC 27216  
1406 S. Mebane Street Burlington, NC 27215  
800-849-8485 | [www.atlasled.com](http://www.atlasled.com)

452-254 021125