



Acorn Post Top

Fully Selectable

PROJECT INFORMATION

JOB NAME	
FIXTURE TYPE	Acorn Post Top
CATALOG NUMBER	
APPROVED BY	

SPECIFICATIONS

Construction:

- Corrosion resistant heavy duty-cast aluminum construction
- UV stabilized powder coated finish
- Designed to mount directly to a 2 3/8" - 3" outer diameter tenon

Lens:

- UV acrylic optic assembly
- Type V distribution

Electrical:

- 120-277 VAC Input 50/60 Hz
- Operating temperature: -40°C to +40°C (-40°F to +104°F)
- Selectable photocell standard

LEDs:

- Selectable CCT: 3000K, 4000K, 5000K
- Selectable lumens: 3,000 (30W), 5,000 (50W), 7,000 (70W)
- 80 CRI minimum
- 0-10 V Dimming
- Long-life LEDs provide >100,000¹ hours of operation with at least 70% of initial output (L70)

Listings:

- Luminaire is certified to UL/cUL Standards for Wet Locations.

Warranty:


- Five-year limited warranty



DIMENSIONS

Weight: 12.5lbs.

EPA: 2.4

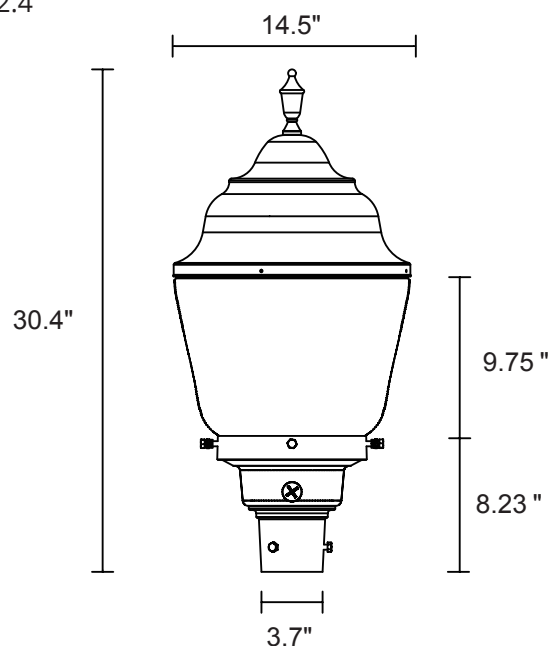

¹Lumen maintenance values at 25°C are calculated per TM-21 based on LM-80 data and in-situ luminaire testing

Rebates and Incentives are available in many areas. Contact an Atlas Representative for more information.



Acorn Post Top

Fully Selectable

ORDERING INFORMATION

ACNS	3-7L				
PRODUCT SERIES	LUMEN PACKAGE	VOLTAGE	COLOR TEMP.	CONTROLS	FIXTURE COLOR
ACNS = Selectable Acorn Post Top	3-7L = 3,000- 7,000 Lumens Selectable	Blank = Universal Voltage (120-277V)	blank = Selectable 3000K, 4000K, 5000K	Blank = Selectable Photocontrol Included	Blank = Black

PERFORMANCE DATA

UNIT	CRI	DISTRIBUTION	Selectable 3000K CCT		Selectable 4000K CCT		Selectable 5000K CCT		WATTS	BUG RATING
			DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)		
3-7L	≥ 80	Type 5	3,045	105	3,271	117	3,223	113	30W	B1-U5-G2
			5,041	101	5,416	113	5,335	109	50W	B1-U5-G2
			6,792	96	7,297	107	7,188	103	70W	B2-U5-G3