



Industrial Low Profile Canopy

PROJECT INFORMATION

JOB NAME	
FIXTURE TYPE	Industrial Low Profile Canopy
CATALOG NUMBER	ILCS
APPROVED BY	

SPECIFICATIONS

Construction:

Designed for commercial and industrial applications, providing cooler operating temperatures, brighter light and longer LED life. Apertures for continuous wiring. Housing is hinged for quick and easy mounting and entrance.

Lens:

Injection molded polycarbonate lens for high impact resistance. Lens is frosted to minimize glare.

Electrical:

AC Input: 120-277V 50-60Hz

0-10 V Dimming

Off-State Power: 0 Watts

Temperatures: Min Start: -40°C Max: 45°C

LEDs:

Atlas LEDs provide higher lumen output, greater energy efficiency and more reliable fixture performance.

100,000+ hrs.¹ lifespan

Selectable with 3000K, 4000K and 5000K CCTs.

80 CRI minimum

Listings:

Luminaire is certified to UL/cUL Standards for Wet Locations

DesignLights Consortium qualified luminaire, eligible for rebates from DLC member utilities. *See chart on other next page for qualifying products.*

IP65 Rated

Testing:


Atlas LED luminaires have been tested by an independent laboratory in accordance with IESNA LM-79 & LM-80.

Warranty: Five-year limited warranty



DIMENSIONS

Weight: 6.4 lbs.

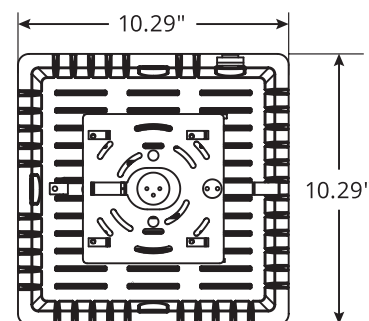

¹Lumen maintenance values at 25°C are calculated per TM-21 based on LM-80 data and in-situ luminaire testing

Rebates and Incentives are available in many areas. Contact an Atlas Representative for more information.



Industrial Low Profile Canopy





ORDERING INFORMATION

ILC	S	5-9L				
PRODUCT SERIES	SELECTABILITY	LUMEN PACKAGE	COLOR TEMP.	CONTROLS	VOLTAGE	FIXTURE COLOR
ILC = Industrial Low Profile Canopy	S = Selectable	5-9L = 5,000 - 9,000 Lumens	blank = Selectable (3000K, 4000K, 5000K)	Blank = Dimming (0-10V)	Blank = 120-277V	Blank = Bronze

PERFORMANCE DATA

LUMEN PACKAGE	CRI	3000K CCT		4000K CCT		5000K CCT		WATTAGE
		DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	
5-9L	80	5,095	155	5,356	167	5,208	159	33
		6,373	153	6,699	164	6,514	157	41
		9,027	145	9,489	157	9,227	148	62

ACCESSORY ORDERING INFORMATION

		PART NUMBER	DESCRIPTION	STD. PKG.
		891660	Quick Connect Microwave Sensor	1
		891661	Microwave Sensor Remote Programmer*	1

* One remote can program multiple sensor

IP RATING

	DESCRIPTION	DEFINITION
6	Dust-tight	No ingress of dust
5	Protects against water jets	Water projected from a nozzle against the enclosure from any direction shall have no harmful effect

DLC PRODUCT INFORMATION

LUMEN PACKAGE	DLC PRODUCT ID	CLASSIFICATION
ILCS5-9L	S-XHFNRP	Premium