



Independence 4' Vaportite

PROJECT INFORMATION

JOB NAME	
FIXTURE TYPE	Independence Vaportite
CATALOG NUMBER	
APPROVED BY	

SPECIFICATIONS

Construction:

The 1-piece housing is made of durable polycarbonate material. The gasket provides a continuous seal for the lens. Twelve stainless steel latches compress lens to housing for a tight seal. Stainless steel mounting brackets are furnished with each fixture.

Lens:

Injection molded polycarbonate lens with high impact additive. Lens is frosted to eliminate glare.

Electrical:

AC Input: 120/208/240/277V

Constant current, Class 2 120-277 VAC, 47-63Hz

High Efficiency – min. 85%

Off-State Power: 0 Watts

0-10 V Dimming

Temperatures: Min Start: -40°C Max: 40°C

LEDs:

Atlas LEDs provide higher lumen output, greater energy efficiency and more reliable fixture performance. LEDs manufactured for the IVT series utilize Epoxy Guard conformal coating which reduces the chance of board corrosion..

100,000+ hrs.¹ lifespan

IVT series fixtures operate at 4000K, 4500K and 5000K CCT.

Listings:

Luminaire is certified to UL/cUL Standards for Wet Locations DesignLights Consortium qualified luminaire, eligible for rebates from DLC member utilities. See chart on next page for qualifying products.

Ratings:

IP65

Testing:

Atlas LED luminaires have been tested by an independent laboratory in accordance with IESNA LM-79 & LM-80.

Applications:

Cold storage, garages, refrigerated cases, stairwells, storage areas, fuel pump canopy, low-bay fixtures for commercial & industrial buildings..

Installation:

Mounting bracket allows unit to be hung with aircraft cable.

Emergency Back-up: For factory installed Emergency Back-Up add suffix EB to part number.


Options: L = Stainless Steel Latches, 3C = 3' Cord, 6C = 6' Cord

Warranty: Five-year limited warranty



DIMENSIONS

Weight: 6.2 lbs.

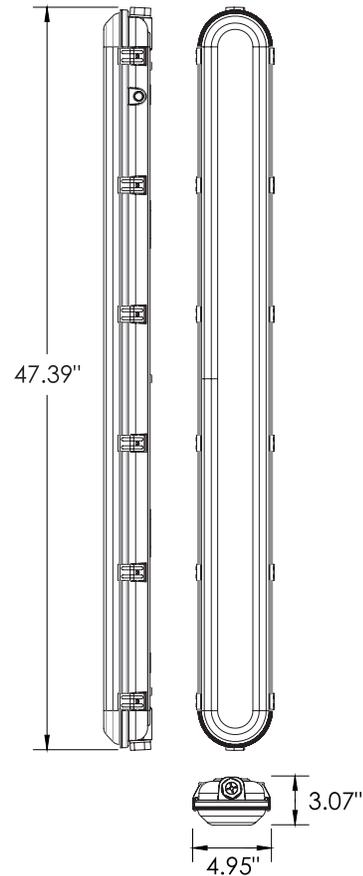

¹LED Life Span Based Upon LM-80 Test Results

Rebates and Incentives are available in many areas.
Contact an Atlas Representative for more information.

*The majority of Atlas Lighting Products are assembled in USA facilities by an American Workforce utilizing both Domestic and Foreign components. Meets Buy American requirements within the ARRA.



Independence

4' Vaportite



ORDERING INFORMATION

IVT		5L		45K		
PRODUCT SERIES	FIXTURE LENGTH	LUMEN PACKAGE	LENS OPTION	COLOR TEMP.	VOLTAGE	OPTIONS
IVT = Independence Vaportite	blank = 4 Feet	5L = 5,000 Lumen Package	Blank = Diffuse	4K = 4000K 45K = 4500K 5K = 5000K	Blank = 120-277	3C = 3' Cord (No Plug) 6C = 6' Cord (No Plug) 10C = 10' Cord (No Plug) 20C = 20' Cord (No Plug) EB = Emergency Back-Up

PERFORMANCE DATA

LUMEN PACKAGE	FIXTURE LENGTH	CRI	4000K CCT		4500K CCT		5000K CCT		WATTAGE	REPLACES UP TO
			DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)		
5L	4'	80	5,275	141	5,214	140	5,214	140	37	4L T8 FL

DLC PRODUCT INFORMATION

LUMEN PACKAGE	FIXTURE LENGTH	4000K CCT		4500K CCT		5000K CCT	
		DLC PRODUCT ID	CLASSIFICATION	DLC PRODUCT ID	CLASSIFICATION	DLC PRODUCT ID	CLASSIFICATION
5L	4'	S-2JNX08	Standard	S-EV2MJK	Standard	S-XZ8W4Q	Standard

IP RATING

	DESCRIPTION	DEFINITION
6	Dust-tight	No ingress of dust
5	Protects against water jets	Water projected from a nozzle against the enclosure from any direction shall have no harmful effect