



Origin Series
Fully Selectable Bullet Flood

PROJECT INFORMATION	
JOB NAME	
FIXTURE TYPE	Fully Selectable Bullet Flood
CATALOG NUMBER	ORBSEL1-3L
APPROVED BY	

SPECIFICATIONS

Construction:

Solid construction die-cast aluminum body.
Diffused PC lens to provide efficient light distribution
UV stabilized power coated finish.

Selectable Lumens and CCT:

Quick and easy to select and set up.
Selectable lumens: 1,000(9W), 2,100(16W) & 3,200(24W).
Selectable CCTs: 3000K, 4000K and 5000K.

Listings:

Luminaire is certified to UL/cUL Standards for Wet Locations.
DesignLights Consortium Premium qualified luminaire, eligible for rebates from DLC member utilities.

AC Input: 120/208/240/277 V

Driver:

Constant current, 120-277 VAC, 50-60 Hz
O-State Power: 0 Watts
0-10 V Dimming

LEDs:

Available in 3000K, 4000K and 5000K Selectable CCT

Testing:


Atlas LED luminaires have been tested by an independent laboratory in accordance with IESNA LM-79 & LM-80.

Warranty: Five-year limited warranty



DIMENSIONS

Weight: 2.7 lbs.

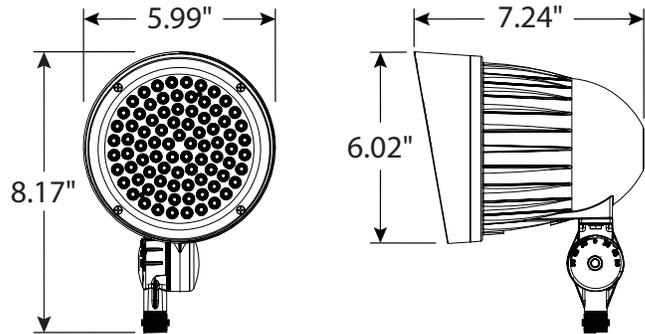

Rebates and Incentives are available in many areas.
Contact an Atlas Representative for more information.



Origin Series
Fully Selectable Bullet Flood



ORDERING INFORMATION

ORB	SEL	1-3L				
PRODUCT SERIES	SELECTABLE	LUMEN PACKAGE	COLOR TEMP.	CONTROLS	VOLTAGE	FIXTURE COLOR
ORB = Origin Bullet Flood	SEL = Selectable	1-3L = 1,000 - 3,200 Lumens Selectable	blank = Selectable 3000K, 4000K, 5000K	Blank = Dimming (0-10V)	Blank = 120-277	Blank = Bronze

PERFORMANCE DATA

UNIT	CRI	SELECTABLE 3000K CCT		SELECTABLE 4000K CCT		SELECTABLE 5000K CCT		WATTAGE
		DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	
1-3L	80+	1,268	134	1,379	148	1,316	137	9
		2,195	133	2,386	148	2,277	137	16
		3,061	131	3,327	145	3,176	135	24

DLC CLASSIFICATION

UNIT	DLC Product ID	Classification
ORBSEL1-3L	S-87Z4FC	Premium