



Origin Series Mini Wall Light



PROJECT INFORMATION

JOB NAME	
FIXTURE TYPE	Mini Wall Light
CATALOG NUMBER	ORMWSEL2-4LPC
APPROVED BY	

SPECIFICATIONS

Construction:

Traditional polycarbonate housing provides proven environmental protection for LED modules. Traditional fixture designs provide a familiar look and standard installation requirements. Retaining this look allows the ability to upgrade fixtures gradually, while retaining the same overall fixture appearance throughout a facility.

Glare Free:

Positioning of the LED modules within the housing result in light directed to desired locations and eliminates offensive light.

Lens:

Lens assembly is designed to provide high efficiency and to target the light where needed to satisfy outdoor lighting requirements.

Thermal Management:

Atlas wall lights are designed as a complete system to optimize LED life and light output. The lower temperatures result in long LED life (50,000+ hrs¹) and component life and also allows for higher light output.

Listings:

Luminaire is certified to UL/cUL Standards for Wet Locations DesignLights Consortium qualified luminaire, eligible for rebates from DLC member utilities.

AC Input: 120/208/240/277V

Driver:

Constant current, Class 2, 120-277 VAC, 50-60 Hz

High Efficiency – min. 84%

Off-State Power: 0 Watts

Dimming: 0-10V

LEDs:

3000K, 4000K, 5000K CCT Selectable

Testing:

Atlas LED luminaires have been tested by an independent laboratory in accordance with IESNA LM-79 & LM-80.

Warranty: Five-year limited warranty

Installation:


Fixture retains the same knock-out sizes and positions as previous models, reducing wiring costs.

Photo Control: 120-277V photo control included.



DIMENSIONS

Weight: 1.4 lbs.

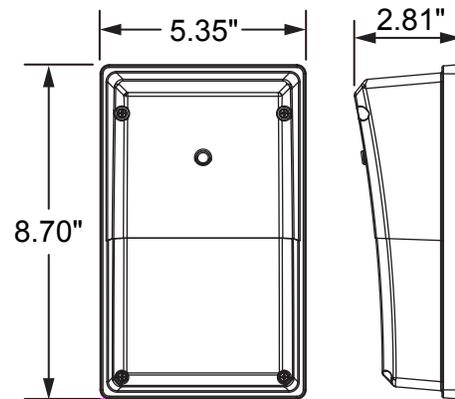

Rebates and Incentives are available in many areas. Contact an Atlas Representative for more information.

¹LED Life Span Based Upon LM-70 Test Results



Origin Series
Mini Wall Light

ORDERING INFORMATION

ORMW	SEL	2-4L		PC		
PRODUCT SERIES	SELECTABLE	WATTAGE	COLOR TEMP.	CONTROLS	VOLTAGE	FIXTURE COLOR
ORMW = Origin Mini Wall Light	SEL = Selectable	2-4L = 2,000 - 4,000 Lumens Selectable	Blank = Selectable 3000K, 4000K, 5000K	PC = 120-277V Photocontrol	Blank = 120-277	Blank = Bronze

PERFORMANCE DATA

UNIT	CRI	3000K CCT		4000K CCT		5000K CCT		WATTAGE	REPLACES UP TO
		DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)		
ORMWSEL2-4LPC	>80	2,287	142	2,418	154	2,476	154	15	175W MH
		2,934	134	3,154	150	3,203	149	20	
		3,815	129	4,202	147	4,238	142	30	

DLC PRODUCT INFORMATION

UNIT	DLC PRODUCT ID	CLASSIFICATION
ORMWSEL2-4LPC	S-NX2FOH	Premium