



MODEL #: ORSF2LSEL

UPC #: 765364027123

Selectable Small Flood



Specifications

Electrical Specifications

- Input Wattage: 14W
- Efficacy: 133 LpW
- AC Input: 120/208/240/277 V
- Driver: Constant current, Class 2, 120-277VAC 50/60Hz

Lighting Specifications


- Total Lumens: 1,928
- Color Temperature: Selectable 3000K, 4000K, 5000K CCT
- Color Rendering Index: 70

Housing Specifications

- Die-cast aluminum housing
- UV stabilized power coated finish
- Color: Bronze
- Lifespan: 50,000 hours

Model	Watts	Lumens	Volts	Color Temp.
ORSF2LSEL	14	1,928	120-277	Selectable 3000K, 4000K, 5000K

Photometrics

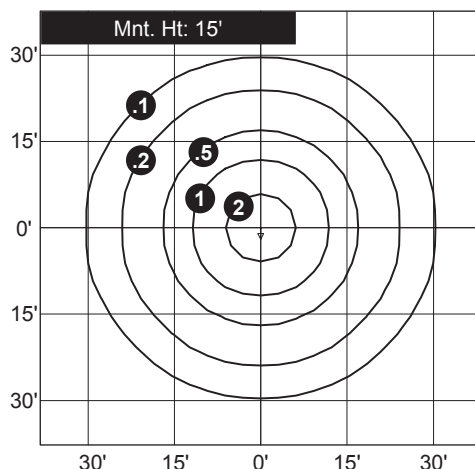

Light Loss Factor	1.00
Total Lumens	1928
Mounting Height	15'
Max. Calculated Value	2.68Fc

Listings

- UL/cUL standards for wet locations
- DLC Premium qualified luminaire, eligible for rebates from DLC member utilities.
DLC Prod. ID: PLMDXXER0ELK

Warranty

- 5-Year limited warranty



origin

BY ATLAS
LIGHTING

PROJECT INFORMATION


MODEL #: ORSF2LSEL

UPC #: 765364027123

Selectable Small Flood

Dimensions

Product Dimensions

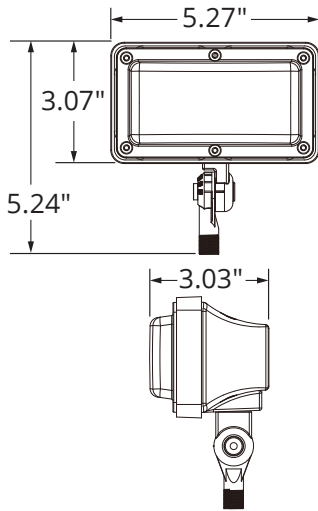


Carton Dimensions

Weight: 1.32 lbs.



Pallet Dimensions

Qty: 648

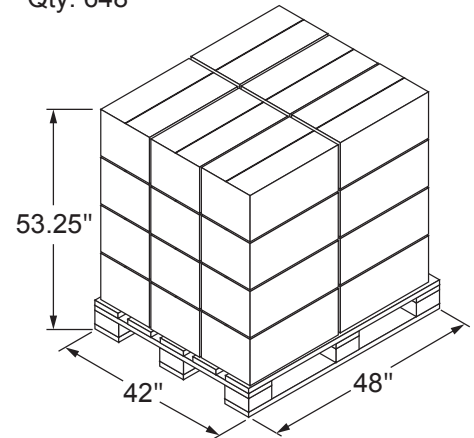

Installation

- Before starting make sure that the power is disconnected.
- Unpack fixture and ensure that there are no damaged parts.
- Attach fixture to outdoor box cover, routing the fixture wires into the junction box. Connect fixture cables as seen below. Black to Black, White to White, Green to Green.
- Aim fixture by loosening the bolt on the arm, and reposition to the desired angle. Tighten the bolt.

