



Origin Series
Slim Selectable Wall Light



PROJECT INFORMATION

JOB NAME	
FIXTURE TYPE	Slim Selectable Wall Light
CATALOG NUMBER	ORSWPSEL2-4L
APPROVED BY	

SPECIFICATIONS

Construction:

Die cast aluminum housing
UV stabilized powder coated finish

Lens:

Polycarbonate lens

Selectable Lumens and CCT:

Quick and easy to select and set up.
Selectable lumens: 2,100(15W), 2,800(20W), 4,200(30W)
Selectable CCTs: 3000K, 4000K and 5000K.

Electrical:

AC Input: 120/208/240/277 V
Driver: Constant current, Class 2, 120-277VAC 50/60Hz
Includes Photocontrol
0-10 V Dimming

LEDs:

Long-life LEDs provide 50,000 hours of operation with at least 70% of initial output (L70).

Listings:

Luminaire is certified to UL/cUL Standards for Wet Locations.
DesignLights Consortium qualified luminaire, eligible for rebates from DLC member utilities.

Testing:

Atlas LED luminaires have been tested by an independent laboratory in accordance with IESNA LM-79 & LM-80.


Warranty:

Five-year limited warranty



DIMENSIONS

Weight: 3 lbs.

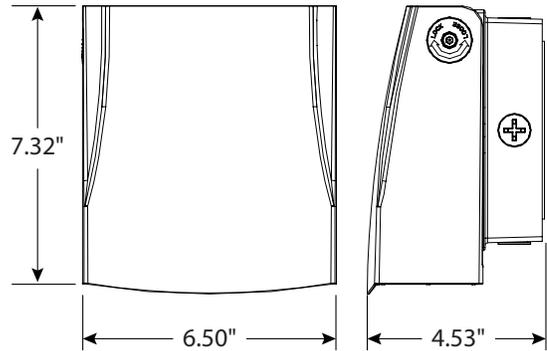

¹LED Life Span Based Upon LM-70 Test Results



Origin Series
Small Selectable Wall Light

ORDERING INFORMATION

ORSWP	SEL	2-4L				
PRODUCT SERIES	SELECTABLE	WATTAGE	COLOR TEMP.	CONTROLS	VOLTAGE	FIXTURE COLOR
ORSWP = Origin Slim Wall Light	SEL = Selectable	2-4L = 2,000 - 4,000 Lumens Selectable	Blank = Selectable 3000K, 4000K, 5000K	blank = 120-277V Photocontrol	Blank = 120-277	Blank = Bronze

PERFORMANCE DATA

UNIT	CRI	3000K CCT		4000K CCT		5000K CCT		WATTAGE	REPLACES UP TO
		DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)		
ORSWPSEL2-4L	>80	1,875	125	2,100	140	2,025	135	15	175W MH
		2,500	125	2,800	140	2,700	135	20	
		3,750	125	4,200	140	4,050	135	30	

DLC PRODUCT INFORMATION

UNIT	DLC PRODUCT ID	CLASSIFICATION
ORSWPSEL2-4L	S-91GLUK	Premium