



Wall Cylinders Selectable

PROJECT INFORMATION

JOB NAME	
FIXTURE TYPE	Wall Cylinders
CATALOG NUMBER	
APPROVED BY	

SPECIFICATIONS

Construction:

Aluminum extrusion housing with UV stabilized powder coated finish

Optical Assembly:

Custom engineered reflectors for smooth distributions.
Semi-diffuse glass for the ideal combination of optical efficiency and uniformity.

Selectability:

3000K, 4000K and 5000K CCT
Up, Down, Full (Up and Down)
Distributions

Electrical:

AC Input: 120-277VAC 50/60Hz

Dimming 0-10V

On/Off PC Standard

Operating Temperature: -40°C (-40°F) – 40°C (104°F)

LEDs:

80 CRI minimum

Long-life LEDs provide 50,000¹ hours of operation with at least 70% of initial output (L70).

Mounting:

Wall mount

Listings:

IP65 Rated

Luminaire is certified to UL/cUL Standards for Wet Locations.


Warranty:

Five-year limited warranty




DIMENSIONS


3" - Weight: 2.9 lbs.

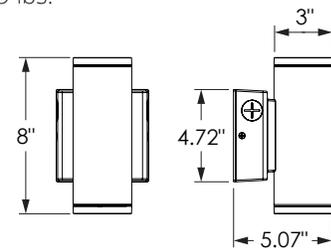

4" - Weight: 4.3 lbs.

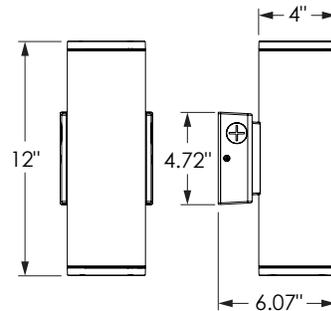

6" - Weight: 5.6 lbs.

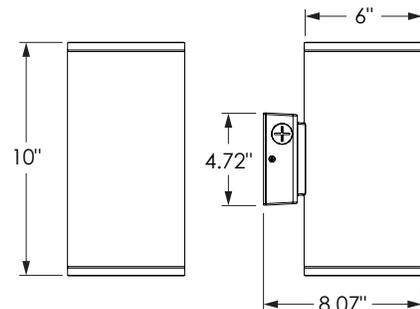

¹Lumen maintenance values at 25°C are calculated per TM-21 based on LM-80 data and in-situ luminaire testing



Wall Cylinders Selectable

ORDERING INFORMATION

WCS	3	2L						
PRODUCT SERIES	SIZE	LUMEN PACKAGE	DISTRIBUTION	COLOR TEMP.	CONTROLS	VOLTAGE	FIXTURE COLOR	OPTIONS
WCS = Selectable Wall Cylinders	3 = 3"	2L = 2,000 Lumens	Blank = 75° 45 = 45°* <i>*only available on 4" and 6"</i>	Blank = Selectable 3000K, 4000K, 5000K	Blank = Universal Photocontrol Installed	Blank = 120-277V	Blank = Black BZ = Bronze WT = White	EB = 4W Emergency Back-up* <i>*only available on 6"</i>
	4 = 4"	3L = 3,000 Lumens						
	6 = 6"	5L = 5,000 Lumens						

PERFORMANCE DATA

UNIT	FIXTURE SIZE	CRI	DELIVERED LUMENS	EFFICACY (LPW)	WATTAGE
WCS32L	3"	80	1,559	126	13
WCS43L	4"		2,542	130	20
WCS65L	6"		4,571	147	33

Data is based off 5000K with 75° distribution in the down only position