Linear High Bay

PROJECT INFORMATION	
JOB NAME	
FIXTURE TYPE	High Bay
CATALOG NUMBER	
APPROVED BY	

SPECIFICATIONS

Construction:
High quality compact 2ft steel construction with white paint-after-fabrication finish

Lens:
Acrylic resin lens

Frosted lens design for maximum light output.

Electrical:
Universal 120-277 AC voltage (50-60Hz) is standard.

0-10 V Dimming capability is standard.

Operating Temperature -40°C to +50°C (-40°F to +122°F)

LEDs:
Long-life LEDs provide 50,000 hours of operation with at least 70% of initial output (L70).

Installation:
Standard 3' chain mount and V-hooks included.

Listings:
Luminaire is certified to UL/cUL Standards for Damp Locations. DesignLights Consortium qualified luminaire, eligible for rebates from DLC member utilities.

Testing:
Atlas LED luminaires have been tested by an independent laboratory in accordance with IESNA LM-79 & LM-80.

Warranty:
Five-year limited warranty

DIMENSIONS

Weight: 18L: 7.3 lbs. / 24L: 8.2 lbs

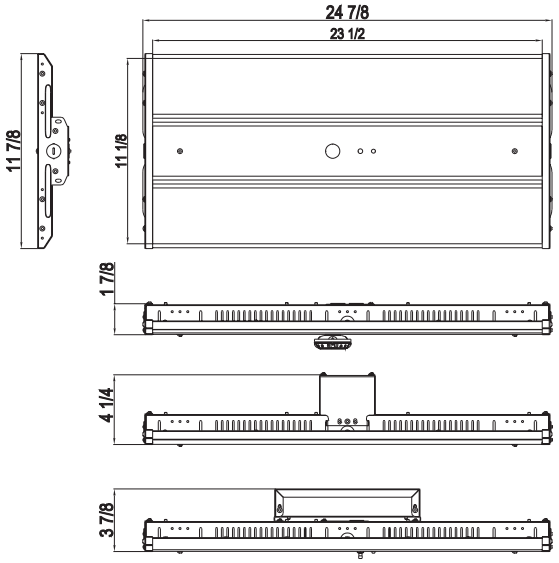

[1]*LED Life Span Based Upon LM-70 Test Results*

Rebates and Incentives are available in many areas.
Contact an Atlas Representative for more information.

Atlas Lighting Products, Inc.
PO Box 2348 | Burlington, NC 27216
800-849-8485 | www.atlasled.com
rev. 073125

Linear High Bay

ORDERING INFORMATION

ORHB	12L	4K			
PRODUCT SERIES	LUMEN PACKAGE	COLOR TEMP.	CONTROLS	VOLTAGE	FIXTURE COLOR
ORHB = High Bay	12L = 12,000 Lumens 18L = 18,000 Lumens 24L = 24,000 Lumens	4K = 4000K 5K = 5000K	Blank = Dimming (0-10V)	Blank = 120-277	Blank = White

PERFORMANCE DATA

Unit	CRI	4000K CCT			5000K CCT			Replaces Up To
		Delivered Lumens	Efficacy (LPW)	Wattage	Delivered Lumens	Efficacy (LPW)	Wattage	
12L	80	12,534	134	93.3	12,507	134	93.6	175W MH
18L	80	17,170	133	129	17,049	133	128	400W MH
24L	80	21,171	128	165	23,111	138	168	400W MH

DLC PRODUCT INFORMATION

Unit	Fixture Length	4000K CCT		5000K CCT	
		DLC Product ID	Classification	DLC Product ID	Classification
ORHB12L	4'	P60B4DP2	Standard	PE8RKOYK	Standard
ORHB18L	4'	P1ZULJUG	Standard	P75860CQ	Standard
ORHB24L	4'	PZ6WPK1F	Standard	PVVHI56M	Standard

Atlas Lighting Products, Inc.
PO Box 2348 | Burlington, NC 27216
800-849-8485 | www.atlasled.com
rev. 073125